



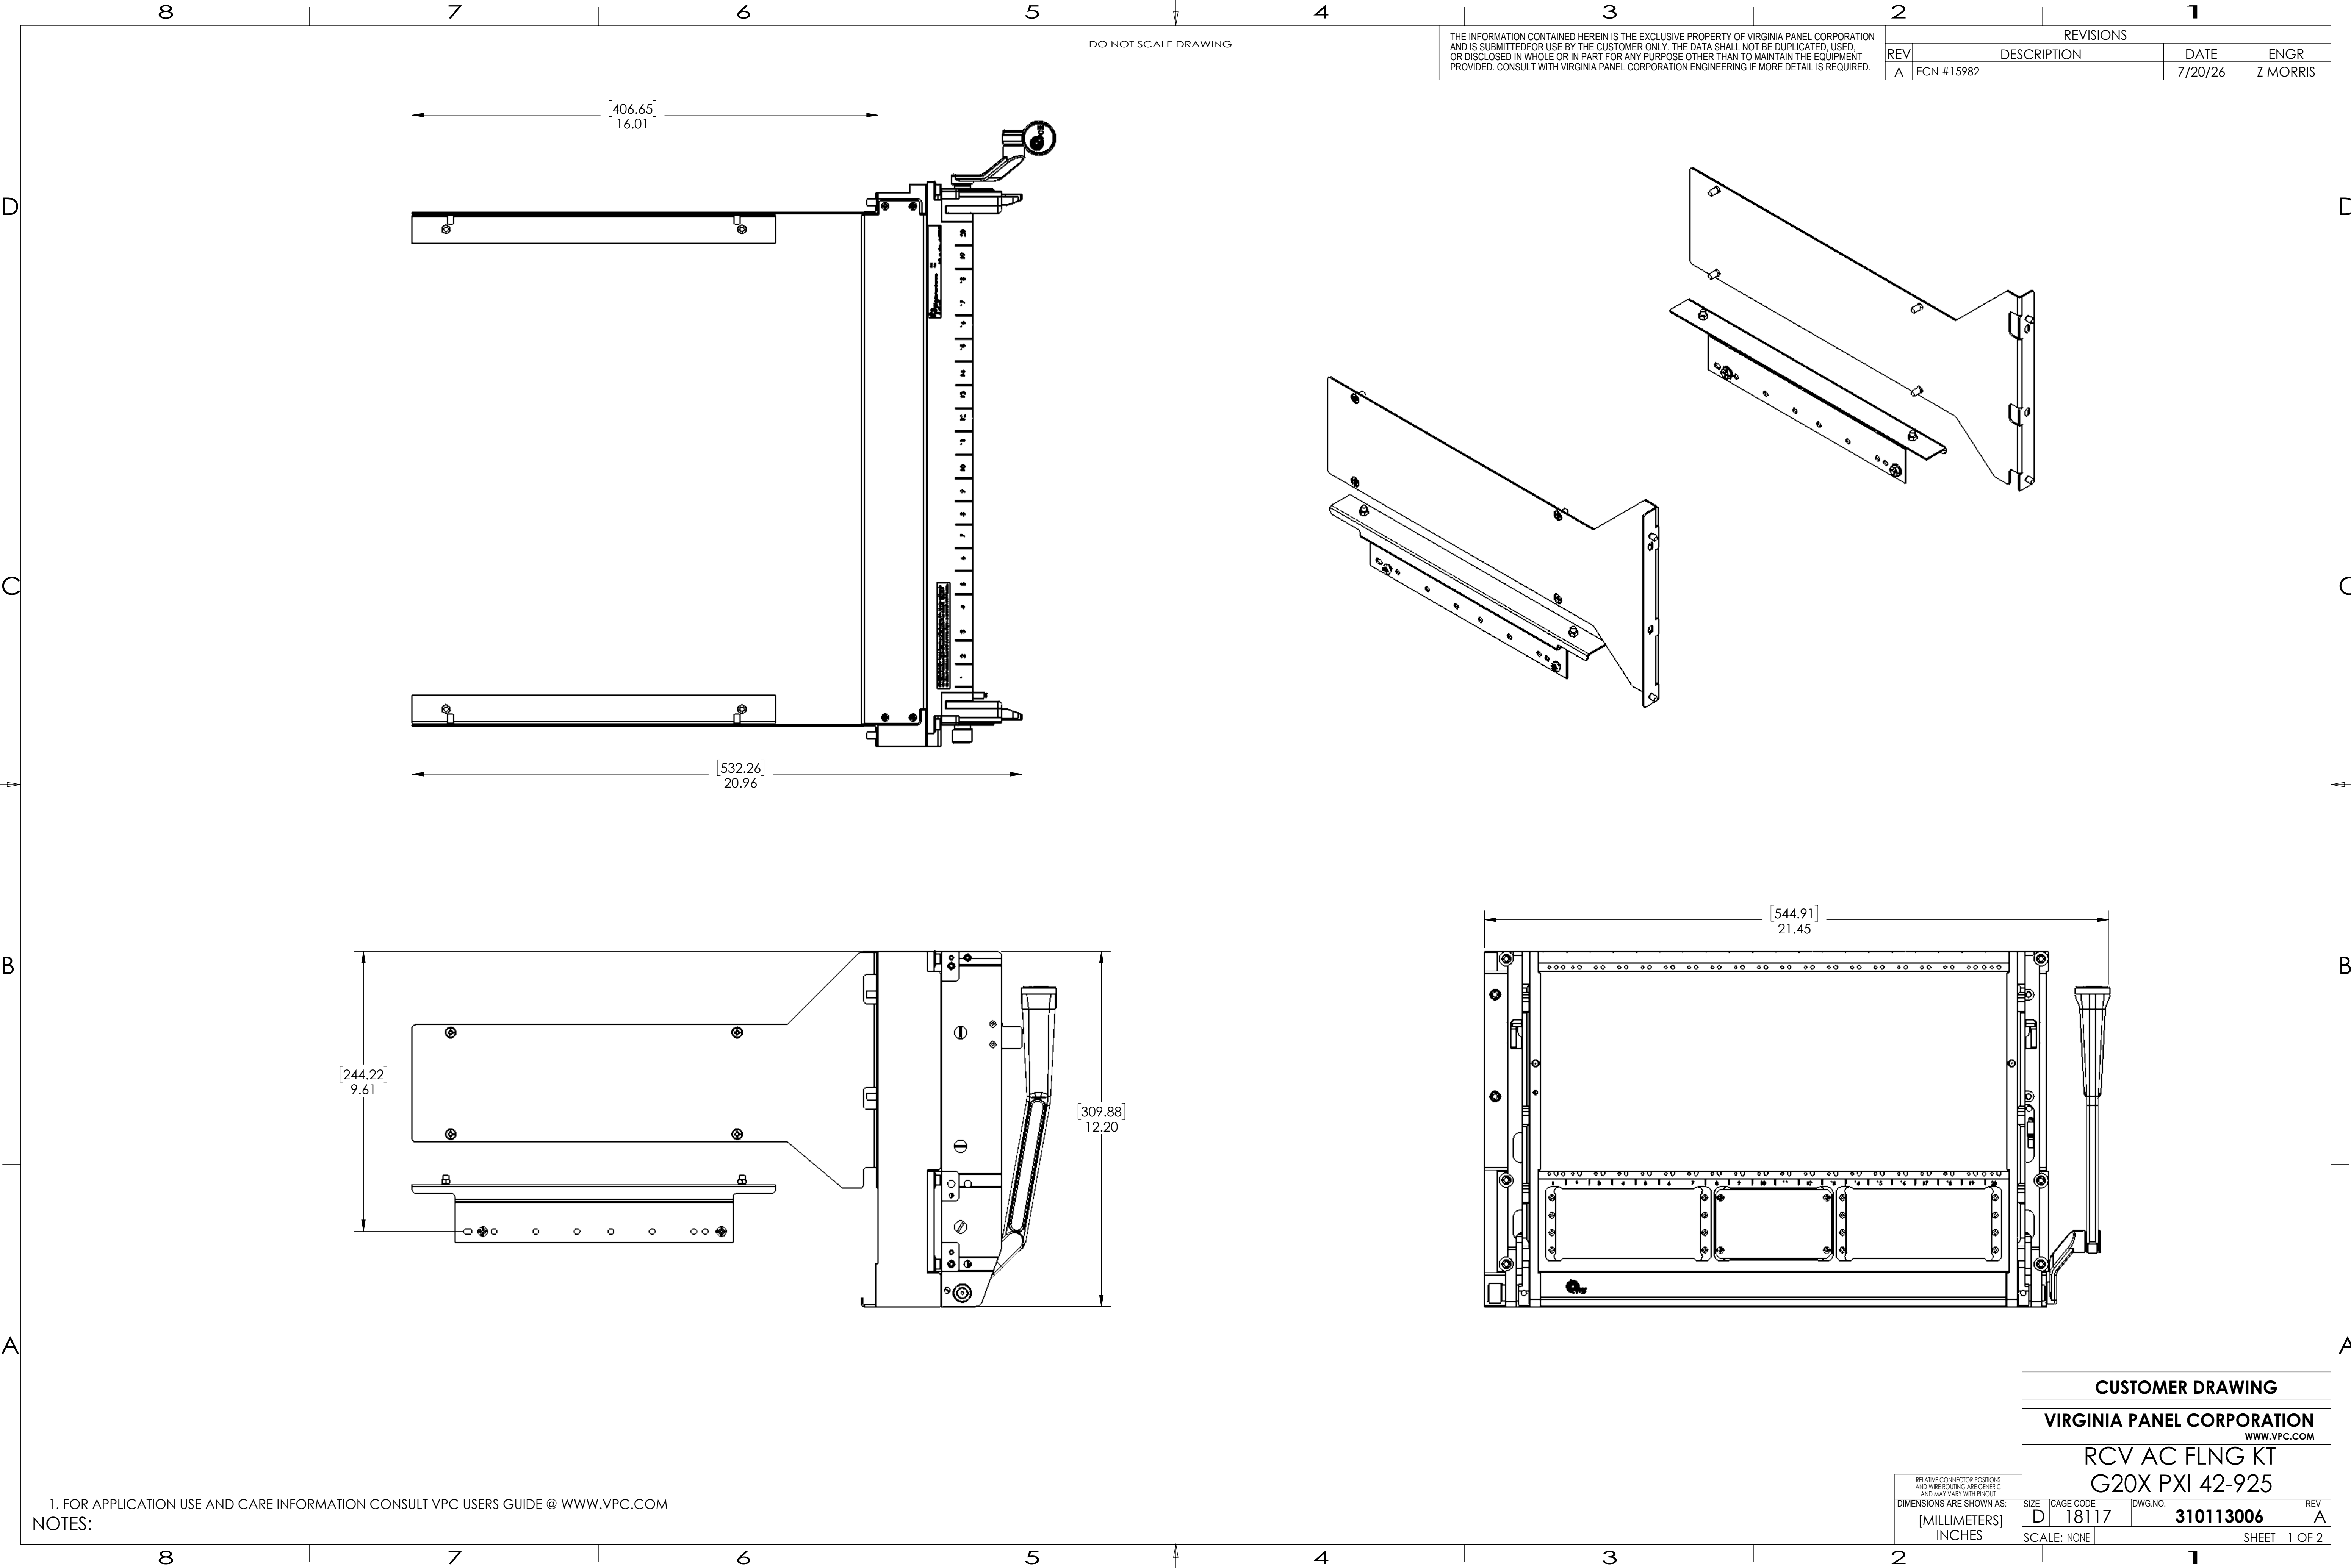

ASSEMBLY INSTRUCTIONS

1. MOUNT AND SECURE RACK SLIDES (MUST BE PURCHASED SEPARATELY) INTO 19" EQUIPMENT RACK AT DESIRED POSITION. THIS ASSEMBLY REQUIRES 7U OF RACK SPACE.
2. REMOVE THE CENTER RAIL FROM EACH SLIDE ASSEMBLY (2 PIECES).
3. ATTACH TWO SLIDE MOUNT FLANGES (414115372-1,414115372-1) TO CENTER SLIDE RAILS USING TWO 8-32 X .38 BUTTON HEAD CAP SCREWS, LOCK WASHERS AND NUTS (ALL SUPPLIED) AS SHOWN (4 SCREWS, WASHERS, AND NUTS TOTAL).
4. INSTALL CENTER SLIDE RAILS BACK INTO SLIDE ASSEMBLIES
5. REMOVE FEET OF PXI CHASSIS AND PLACE ONTO INSTRUMENT BRACKETS ON TOP OF SLIDE MOUNT FLANGES AND SECURE USING FOUR M4 X 10mm PAN HEAD PHILLIPS SCREWS, LOCK WASHERS, AND NUTS (SUPPLIED) PER FLANGE.
6. REMOVE SIDE PANELS OF PXI CHASSIS AND ATTACH LEFT (414115370-1) AND RIGHT (414115371-1) FLANGES ONTO CHASSIS FLANGES USING 4 M4 X 10mm FLAT HEAD PHILLIPS SCREWS (SUPPLIED) PER FLANGE (8 SCREWS TOTAL).
7. ATTACH RECEIVER ASSEMBLY (310120186) TO LEFT AND RIGHT MOUNTING RAILS USING SUPPLIED FLAT HEAD SCREWS. DO NOT COMPLETELY TIGHTEN SCREWS COMPLETELY. INSTALL A PXI FUNNEL ASSEMBLY WITH PXI INSTRUMENT ATTACHED TO ADJUST RECEIVER'S LEFT TO RIGHT POSITION. TIGHTEN RECEIVER MOUNTING SCREWS AFTER COMPLETING ALIGNMENT.

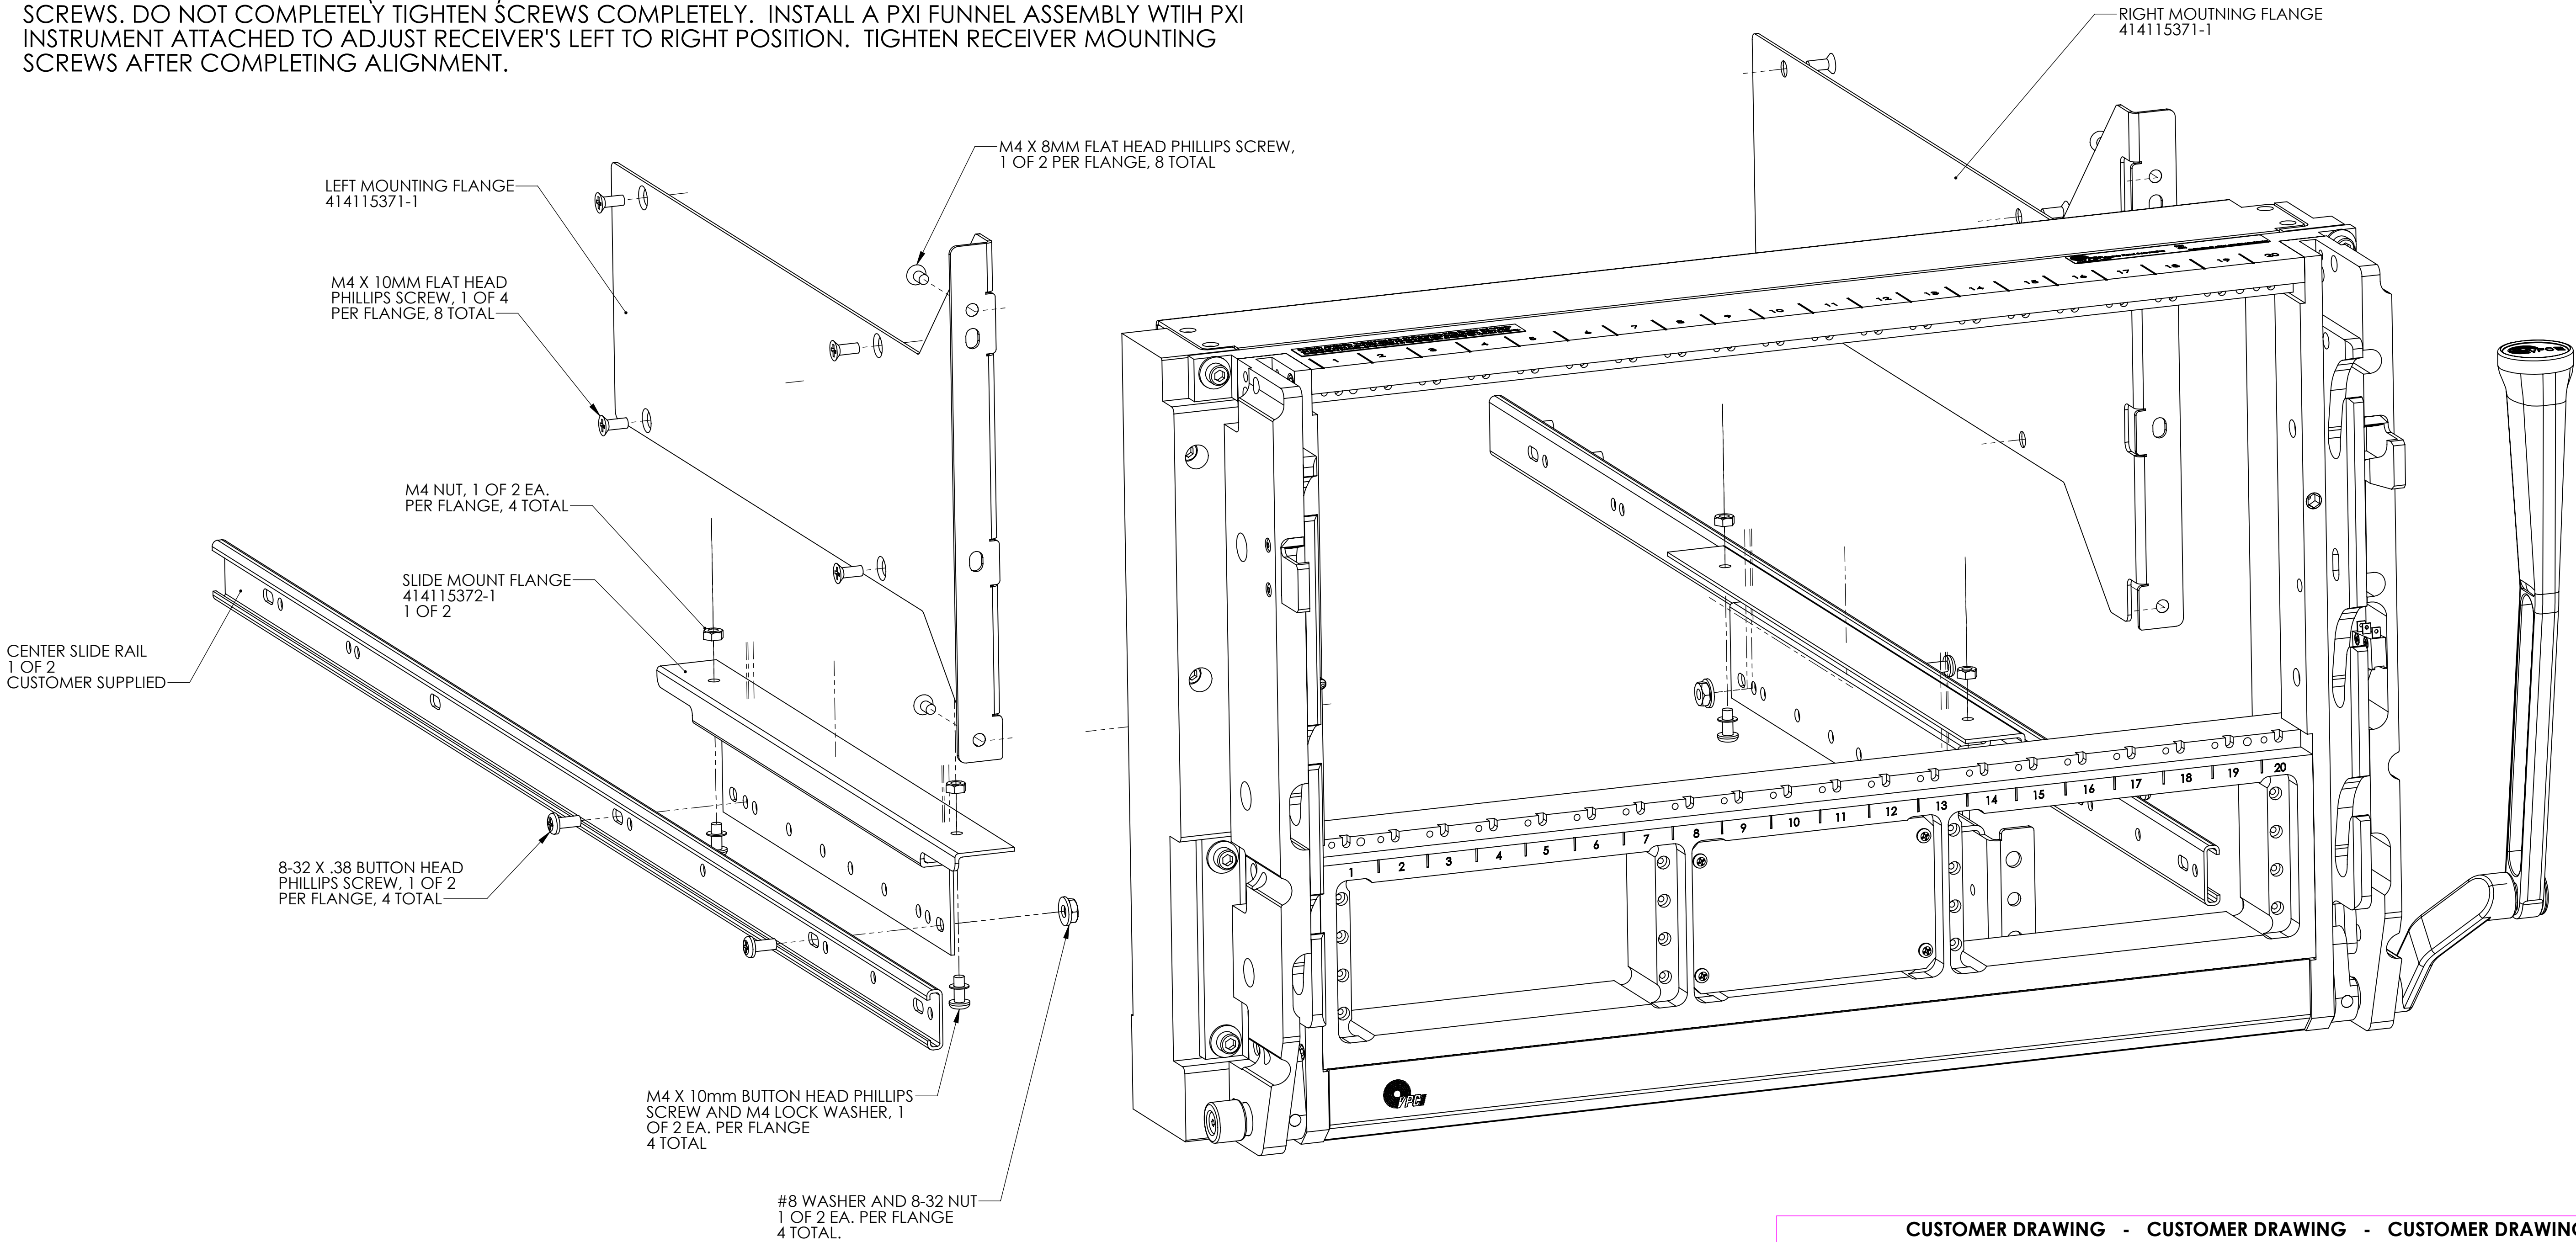

NOTES:

DO NOT SCALE DRAWING

CUSTOMER DRAWING - CUSTOMER DRAWING - CUSTOMER DRAWING				REV
THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.		SIZE D	CAGE CODE 18117	DWG.NO. 310113006
		SCALE: NONE		REV A
				SHEET 2 OF 2