


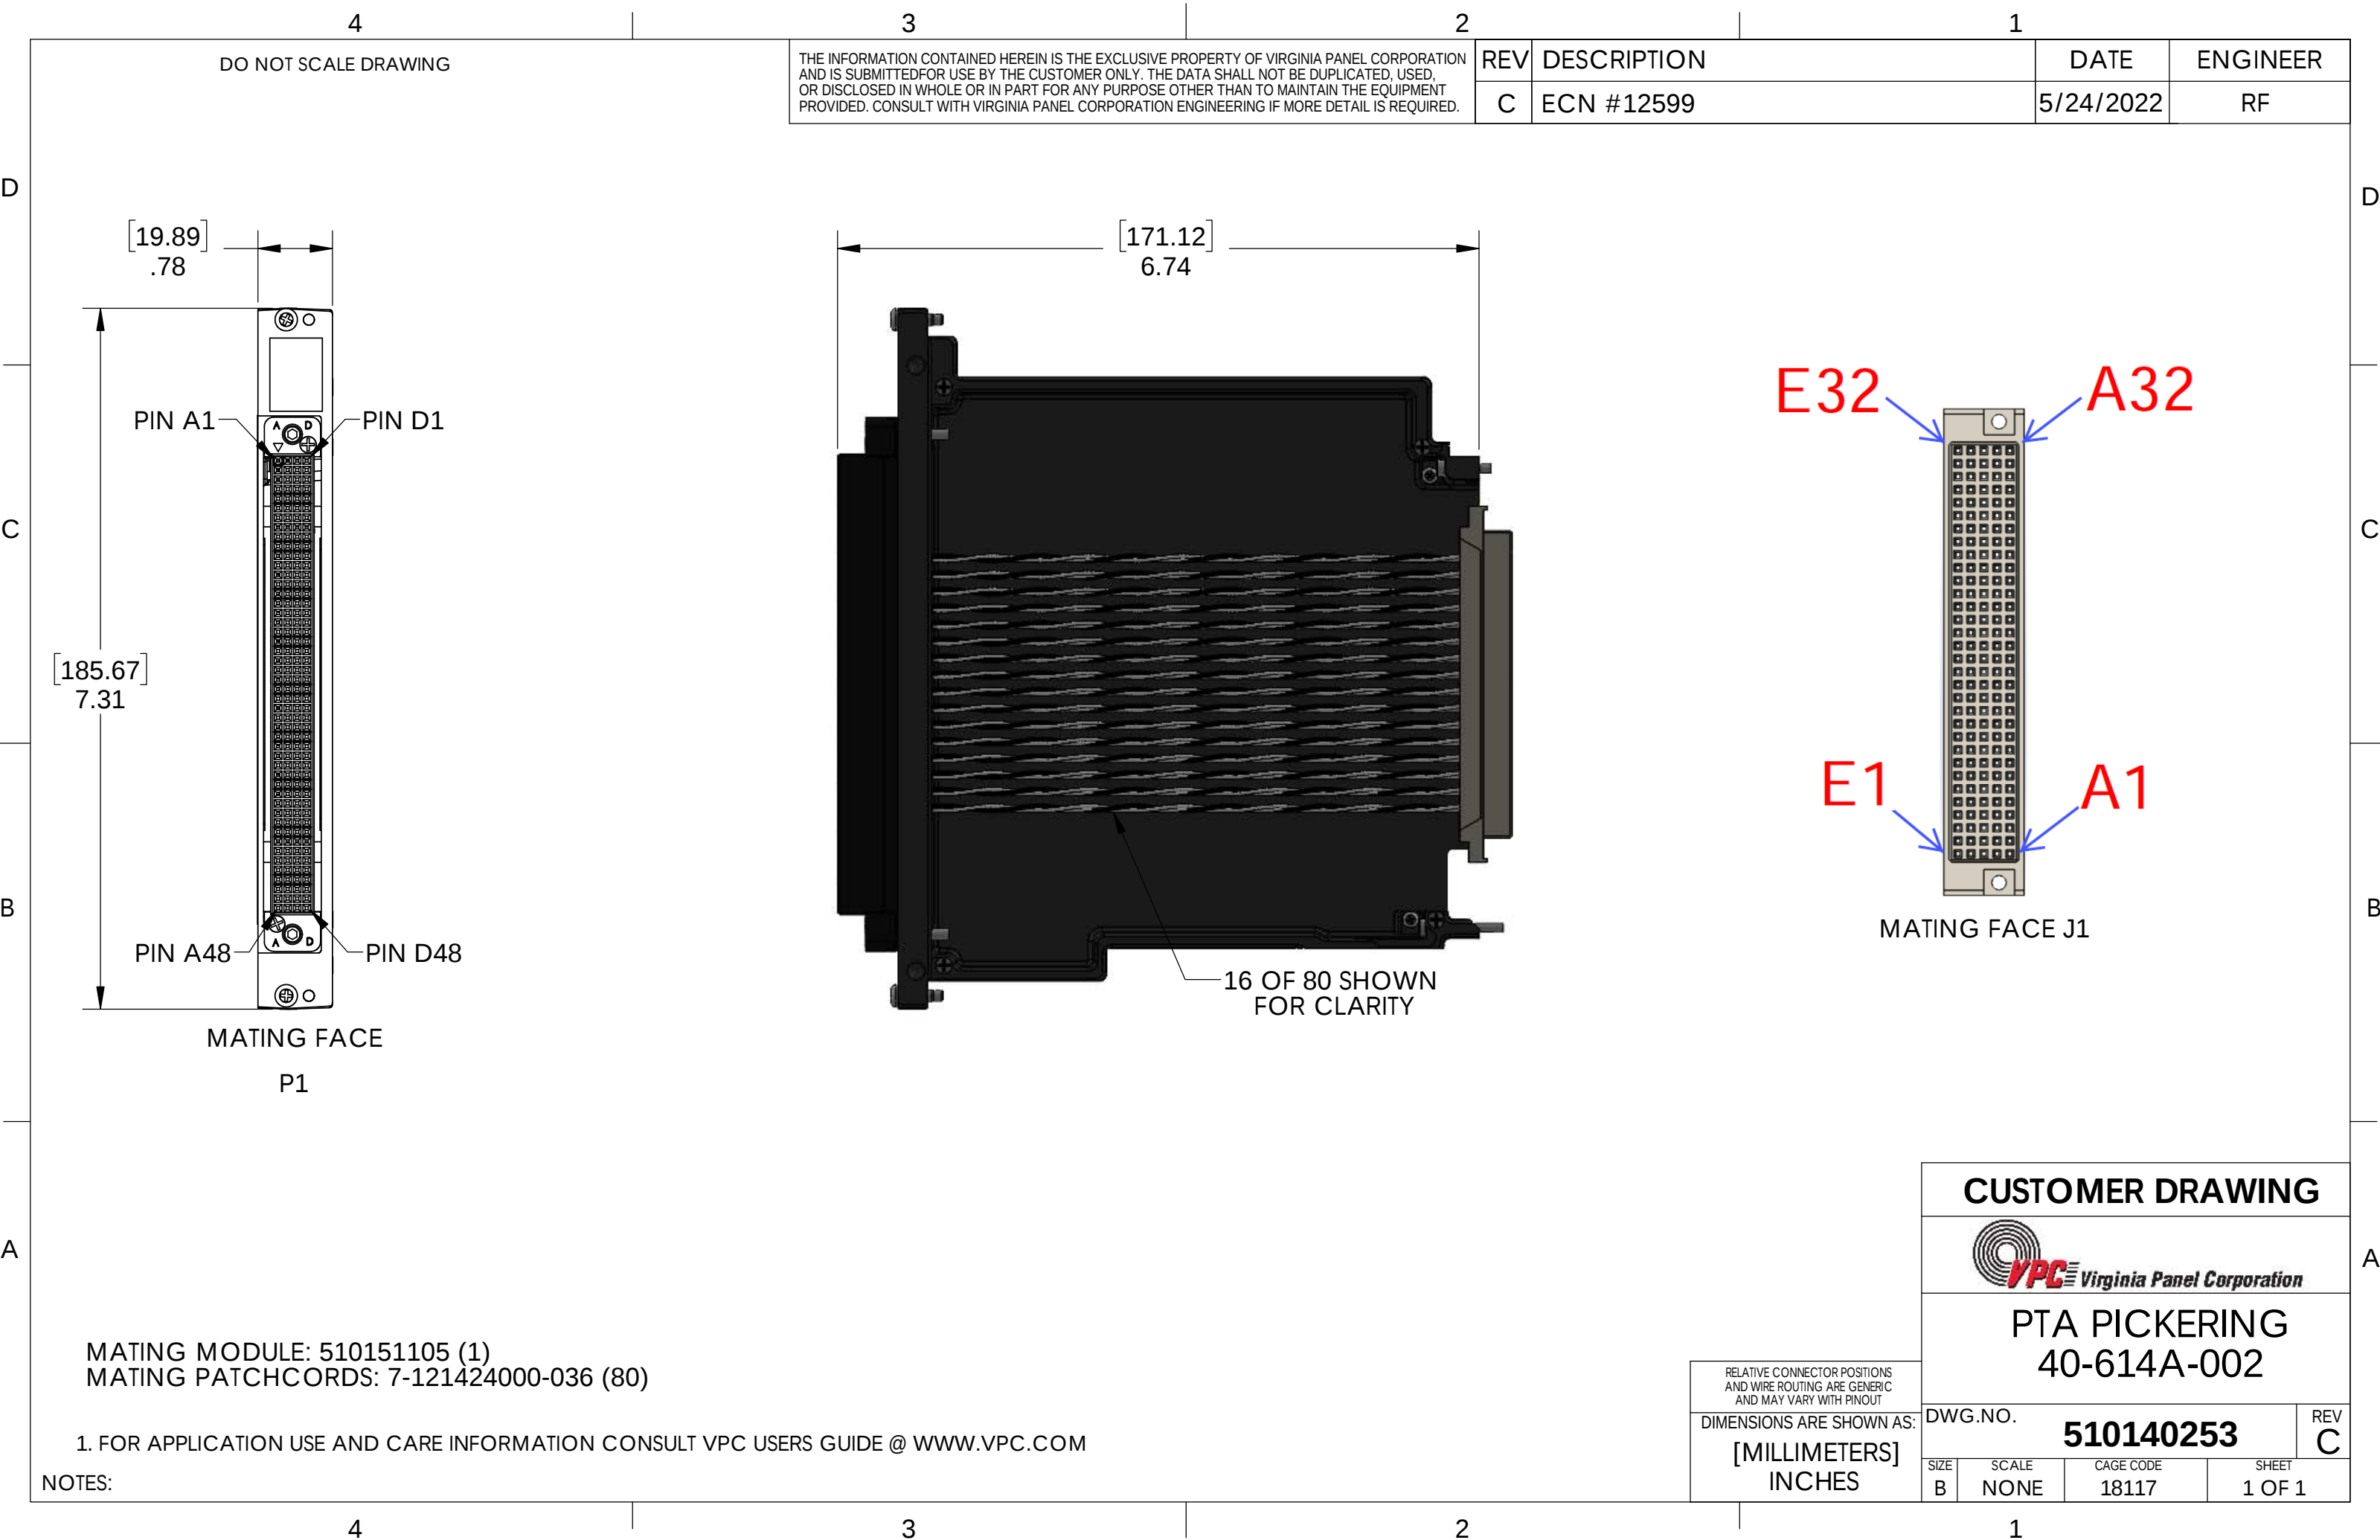

DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REV	DESCRIPTION	DATE	ENGINEER
C	ECN #12599	5/24/2022	RF

PIN A1 PIN D1

PIN A48 PIN D48

MATING FACE
P1

16 OF 80 SHOWN
FOR CLARITY

E32 A32
E1 A1
MATING FACE J1

MATING MODULE: 510151105 (1)
MATING PATCHCORDS: 7-121424000-036 (80)

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM

NOTES:

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT			
DIMENSIONS ARE SHOWN AS:			
[MILLIMETERS] INCHES			
SIZE B	SCALE NONE	CAGE CODE 18117	SHEET 1 OF 1

CUSTOMER DRAWING			
PTA PICKERING 40-614A-002			
DWG.NO.		REV	
510140253		C	

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Wire Color	T/P #	To Location (Conn - Pin)
1	P1-B42	24 T/P	7-124424000-008	WHT	1	J1-A1
2	P1-A42	↑	↑	BLK	↑	J1-A2
3	P1-B29	24 T/P	7-124424000-008	WHT	2	J1-A3
4	P1-A29	↑	↑	BLK	↑	J1-A4
5	P1-C46	24 T/P	7-124424000-008	WHT	3	J1-A5
6	P1-D46	↑	↑	BLK	↑	J1-A6
7	P1-A33	24 T/P	7-124424000-008	WHT	4	J1-A7
8	P1-B33	↑	↑	BLK	↑	J1-A8
9	P1-B16	24 T/P	7-124424000-008	WHT	5	J1-A9
10	P1-A16	↑	↑	BLK	↑	J1-A10
11	P1-D8	24 T/P	7-124424000-008	WHT	6	J1-A11
12	P1-C8	↑	↑	BLK	↑	J1-A12
13	P1-C20	24 T/P	7-124424000-008	WHT	7	J1-A13
14	P1-D20	↑	↑	BLK	↑	J1-A14
15	P1-C6	24 T/P	7-124424000-008	WHT	8	J1-A15
16	P1-D6	↑	↑	BLK	↑	J1-A16
17	P1-B45	24 T/P	7-124424000-008	WHT	9	J1-A17
18	P1-A45	↑	↑	BLK	↑	J1-A18
19	P1-D38	24 T/P	7-124424000-008	WHT	10	J1-A19
20	P1-C38	↑	↑	BLK	↑	J1-A20
21	P1-D25	24 T/P	7-124424000-008	WHT	11	J1-A21
22	P1-C25	↑	↑	BLK	↑	J1-A22
23	P1-A36	24 T/P	7-124424000-008	WHT	12	J1-A23
24	P1-B36	↑	↑	BLK	↑	J1-A24
25	P1-D24	24 T/P	7-124424000-008	WHT	13	J1-A25
26	P1-C24	↑	↑	BLK	↑	J1-A26
27	P1-D12	24 T/P	7-124424000-008	WHT	14	J1-A27
28	P1-C12	↑	↑	BLK	↑	J1-A28
29	P1-B5	24 T/P	7-124424000-008	WHT	15	J1-A29
30	P1-A5	↑	↑	BLK	↑	J1-A30
31	P1-C17	24 T/P	7-124424000-008	WHT	16	J1-A31
32	P1-D17	↑	↑	BLK	↑	J1-A32
33	P1-D48	24 T/P	7-124424000-008	WHT	17	J1-B1
34	P1-C48	↑	↑	BLK	↑	J1-C1
35	P1-D47	24 T/P	7-124424000-008	WHT	18	J1-B2
36	P1-C47	↑	↑	BLK	↑	J1-C2
37	P1-D41	24 T/P	7-124424000-008	WHT	19	J1-B3
38	P1-C41	↑	↑	BLK	↑	J1-C3
39	P1-B35	24 T/P	7-124424000-008	WHT	20	J1-B4
40	P1-A35	↑	↑	BLK	↑	J1-C4
41	P1-D28	24 T/P	7-124424000-008	WHT	21	J1-B5
42	P1-C28	↑	↑	BLK	↑	J1-C5
43	P1-D45	24 T/P	7-124424000-008	WHT	22	J1-B6
44	P1-C45	↑	↑	BLK	↑	J1-C6
45	P1-A40	24 T/P	7-124424000-008	WHT	23	J1-B7
46	P1-B40	↑	↑	BLK	↑	J1-C7
47	P1-A41	24 T/P	7-124424000-008	WHT	24	J1-B8
48	P1-B41	↑	↑	BLK	↑	J1-C8
49	P1-D27	24 T/P	7-124424000-008	WHT	25	J1-B9
50	P1-C27	↑	↑	BLK	↑	J1-C9
51	P1-B22	24 T/P	7-124424000-008	WHT	26	J1-B10
52	P1-A22	↑	↑	BLK	↑	J1-C10

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Wire Color	T/P #	To Location (Conn - Pin)
53	P1-D15	24 T/P	7-124424000-008	WHT	27	J1-B11
54	P1-C15	↑	↑	BLK	↑	J1-C11
55	P1-D9	24 T/P	7-124424000-008	WHT	28	J1-B12
56	P1-C9	↑	↑	BLK	↑	J1-C12
57	P1-B3	24 T/P	7-124424000-008	WHT	29	J1-B13
58	P1-A3	↑	↑	BLK	↑	J1-C13
59	P1-A27	24 T/P	7-124424000-008	WHT	30	J1-B14
60	P1-B27	↑	↑	BLK	↑	J1-C14
61	P1-A21	24 T/P	7-124424000-008	WHT	31	J1-B15
62	P1-B21	↑	↑	BLK	↑	J1-C15
63	P1-A14	24 T/P	7-124424000-008	WHT	32	J1-B16
64	P1-B14	↑	↑	BLK	↑	J1-C16
65	P1-C33	24 T/P	7-124424000-008	WHT	33	J1-B17
66	P1-D33	↑	↑	BLK	↑	J1-C17
67	P1-A26	24 T/P	7-124424000-008	WHT	34	J1-B18
68	P1-B26	↑	↑	BLK	↑	J1-C18
69	P1-D44	24 T/P	7-124424000-008	WHT	35	J1-B19
70	P1-C44	↑	↑	BLK	↑	J1-C19
71	P1-D39	24 T/P	7-124424000-008	WHT	36	J1-B20
72	P1-C39	↑	↑	BLK	↑	J1-C20
73	P1-B38	24 T/P	7-124424000-008	WHT	37	J1-B21
74	P1-A38	↑	↑	BLK	↑	J1-C21
75	P1-D31	24 T/P	7-124424000-008	WHT	38	J1-B22
76	P1-C31	↑	↑	BLK	↑	J1-C22
77	P1-B25	24 T/P	7-124424000-008	WHT	39	J1-B23
78	P1-A25	↑	↑	BLK	↑	J1-C23
79	P1-A43	24 T/P	7-124424000-008	WHT	40	J1-B24
80	P1-B43	↑	↑	BLK	↑	J1-C24
81	P1-A7	24 T/P	7-124424000-008	WHT	41	J1-B25
82	P1-B7	↑	↑	BLK	↑	J1-C25
83	P1-A8	24 T/P	7-124424000-008	WHT	42	J1-B26
84	P1-B8	↑	↑	BLK	↑	J1-C26
85	P1-D19	24 T/P	7-124424000-008	WHT	43	J1-B27
86	P1-C19	↑	↑	BLK	↑	J1-C27
87	P1-D18	24 T/P	7-124424000-008	WHT	44	J1-B28
88	P1-C18	↑	↑	BLK	↑	J1-C28
89	P1-B12	24 T/P	7-124424000-008	WHT	45	J1-B29
90	P1-A12	↑	↑	BLK	↑	J1-C29
91	P1-B6	24 T/P	7-124424000-008	WHT	46	J1-B30
92	P1-A6	↑	↑	BLK	↑	J1-C30
93	P1-D1	24 T/P	7-124424000-008	WHT	47	J1-B31
94	P1-C1	↑	↑	BLK	↑	J1-C31
95	P1-C16	24 T/P	7-124424000-008	WHT	48	J1-B32
96	P1-D16	↑	↑	BLK	↑	J1-C32
97	P1-B48	24 T/P	7-124424000-008	WHT	49	J1-D1
98	P1-A48	↑	↑	BLK	↑	J1-E1
99	P1-B47	24 T/P	7-124424000-008	WHT	50	J1-D2
100	P1-A47	↑	↑	BLK	↑	J1-E2
101	P1-D35	24 T/P	7-124424000-008	WHT	51	J1-D3
102	P1-C35	↑	↑	BLK	↑	J1-E3
103	P1-D34	24 T/P	7-124424000-008	WHT	52	J1-D4
104	P1-C34	↑	↑	BLK	↑	J1-E4

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Wire Color	T/P #	To Location (Conn - Pin)
105	P1-B28	24 T/P	7-124424000-008	WHT	53	J1-D5
106	P1-A28	↑	↑	BLK	↑	J1-E5
107	P1-A46	24 T/P	7-124424000-008	WHT	54	J1-D6
108	P1-B46	↑	↑	BLK	↑	J1-E6
109	P1-C40	24 T/P	7-124424000-008	WHT	55	J1-D7
110	P1-D40	↑	↑	BLK	↑	J1-E7
111	P1-C32	24 T/P	7-124424000-008	WHT	56	J1-D8
112	P1-D32	↑	↑	BLK	↑	J1-E8
113	P1-D22	24 T/P	7-124424000-008	WHT	57	J1-D9
114	P1-C22	↑	↑	BLK	↑	J1-E9
115	P1-D21	24 T/P	7-124424000-008	WHT	58	J1-D10
116	P1-C21	↑	↑	BLK	↑	J1-E10
117	P1-B15	24 T/P	7-124424000-008	WHT	59	J1-D11
118	P1-A15	↑	↑	BLK	↑	J1-E11
119	P1-B9	24 T/P	7-124424000-008	WHT	60	J1-D12
120	P1-A9	↑	↑	BLK	↑	J1-E12
121	P1-D2	24 T/P	7-124424000-008	WHT	61	J1-D13
122	P1-C2	↑	↑	BLK	↑	J1-E13
123	P1-A20	24 T/P	7-124424000-008	WHT	62	J1-D14
124	P1-B20	↑	↑	BLK	↑	J1-E14
125	P1-C13	24 T/P	7-124424000-008	WHT	63	J1-D15
126	P1-D13	↑	↑	BLK	↑	J1-E15
127	P1-C14	24 T/P	7-124424000-008	WHT	64	J1-D16
128	P1-D14	↑	↑	BLK	↑	J1-E16
129	P1-A34	24 T/P	7-124424000-008	WHT	65	J1-D17
130	P1-B34	↑	↑	BLK	↑	J1-E17
131	P1-C26	24 T/P	7-124424000-008	WHT	66	J1-D18
132	P1-D26	↑	↑	BLK	↑	J1-E18
133	P1-B44	24 T/P	7-124424000-008	WHT	67	J1-D19
134	P1-A44	↑	↑	BLK	↑	J1-E19
135	P1-B39	24 T/P	7-124424000-008	WHT	68	J1-D20
136	P1-A39	↑	↑	BLK	↑	J1-E20
137	P1-B32	24 T/P	7-124424000-008	WHT	69	J1-D21
138	P1-A32	↑	↑	BLK	↑	J1-E21
139	P1-B31	24 T/P	7-124424000-008	WHT	70	J1-D22
140	P1-A31	↑	↑	BLK	↑	J1-E22
141	P1-C42	24 T/P	7-124424000-008	WHT	71	J1-D23
142	P1-D42	↑	↑	BLK	↑	J1-E23
143	P1-C43	24 T/P	7-124424000-008	WHT	72	J1-D24
144	P1-D43	↑	↑	BLK	↑	J1-E24

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Wire Color	T/P #	To Location (Conn - Pin)
145	P1-C7	24 T/P	7-124424000-008	WHT	73	J1-D25
146	P1-D7	↑	↑	BLK	↑	J1-E25
147	P1-A2	24 T/P	7-124424000-008	WHT	74	J1-D26
148	P1-B2	↑	↑	BLK	↑	J1-E26
149	P1-B19	24 T/P	7-124424000-008	WHT	75	J1-D27
150	P1-A19	↑	↑	BLK	↑	J1-E27
151	P1-B13	24 T/P	7-124424000-008	WHT	76	J1-D28
152	P1-A13	↑	↑	BLK	↑	J1-E28
153	P1-D11	24 T/P	7-124424000-008	WHT	77	J1-D29
154	P1-C11	↑	↑	BLK	↑	J1-E29
155	P1-D5	24 T/P	7-124424000-008	WHT	78	J1-D30
156	P1-C5	↑	↑	BLK	↑	J1-E30
157	P1-A24	24 T/P	7-124424000-008	WHT	79	J1-D31
158	P1-B24	↑	↑	BLK	↑	J1-E31
159	P1-A17	24 T/P	7-124424000-008	WHT	80	J1-D32
160	P1-B17	↑	↑	BLK	↑	J1-E32