


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.




REV	DESCRIPTION	DATE	ENGINEER
B	ECN #10356	6/2/2020	A SHEPARD

SIM VTAC PASS THROUGH INSERT
VPC P/N 610151103
4 PLCS.

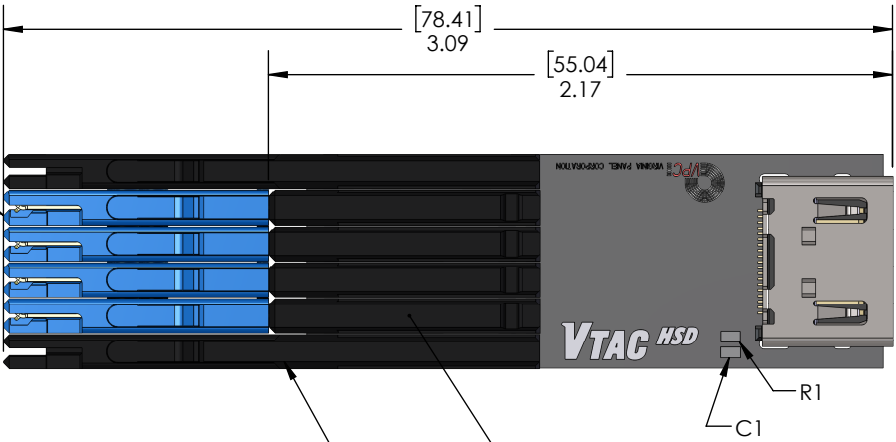

SIM VTAC RETENTION INSERT
VPC P/N 610151105
2 PLCS.

SIM VTAC RIGHT ANGLE INSERT
VPC P/N 610151104
4 PLCS.

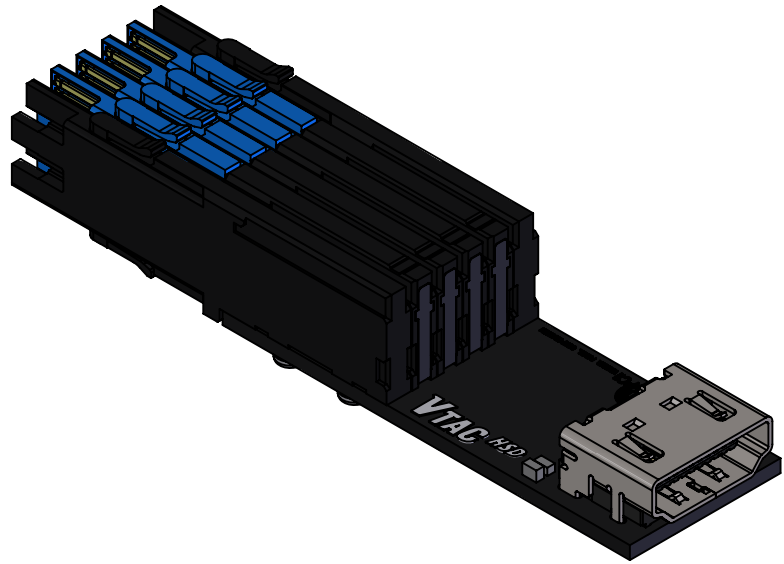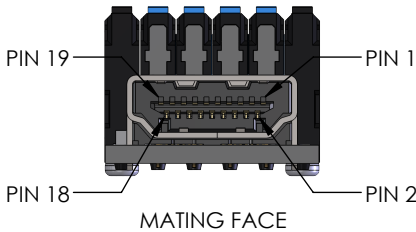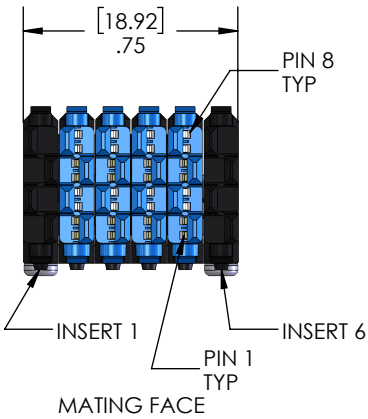

7. MATES WITH PCB ADAPTER PART NUMBER 510171113 OR PATCHCORD PART NUMBER 7-141712693-XXX.
6. PCB DESIGNED TO BE LOADED ON THE LEFT WHEN VIEWED FROM THE VPC RECEIVER MATING FACE.
5. ASSEMBLY RETAINED IN MODULE BY RETENTION INSERT, P/N 610151105, ONLY. 2 EXTRACTION TOOL REQUIRED FOR REMOVAL.
4. PCB ASSEMBLY COMES WITH PASS THROUGH INSERT, P/N 610151103, ASSEMBLED ONTO RIGHT ANGLE INSERT P/N 610151104. PLUG BLANK INSERTS, P/N 610151103, IN ADJACENT SLOTS BEFORE PLUGGING ASSEMBLY.
3. PCB ASSEMBLY REQUIRES 6 EMPTY VTAC MODULE POSITIONS.
2. MATERIALS:
PCB:
PCB = R4003
PCB PADS = GOLD IMMERSION
VTAC INSERTS:
VTAC CONTACT = ALLOY 7025
OUTER SHELL = BLUE/BLACK LCP
HDMI FEMALE:
HOUSING = GLASS FILLED THERMOPLASTIC
CONTACT = COPPER ALLOY
SHELL = COPPER ALLOY

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM

NOTES:

Run #	From Insert	From Pin	Signal Description	To Connector	To Pin	Run#	From Insert	From Pin	Signal Description	To (Connector-Pin)
1	2	2	CEC	HDMI	13	17	2	1	TMDS_SHIELD	HDMI-2, HDMI-5, HDMI-8, HDMI-11, HDMI-17
2	2	6	TMDS DATA2_P	HDMI	1	18	2	3	TMDS_SHIELD	
3	2	7	TMDS DATA2_N	HDMI	3	19	2	4	TMDS_SHIELD	
4	3	2	SCL_SDA_N	HDMI	16	20	2	5	TMDS_SHIELD	
5	3	3	SCL_SDA_P	HDMI	15	21	2	8	TMDS_SHIELD	
6	3	6	TMDS DATA1_P	HDMI	4	22	3	1	TMDS_SHIELD	
7	3	7	TMDS DATA1_N	HDMI	6	23	3	4	TMDS_SHIELD	
8	4	2	+5V	HDMI	18	24	3	5	TMDS_SHIELD	
9	4	6	TMDS DATA0_P	HDMI	7	25	3	8	TMDS_SHIELD	
10	4	7	TMDS DATA0_N	HDMI	9	26	4	1	TMDS_SHIELD	
11	5	2	HDMI ENET_N	HDMI	19	27	4	3	TMDS_SHIELD	
12	5	3	HDMI ENET_P	HDMI	14	28	4	4	TMDS_SHIELD	
13	5	6	TMDS CLOCK_P	HDMI	10	29	4	5	TMDS_SHIELD	
14	5	7	TMDS CLOCK_N	HDMI	12	30	4	8	TMDS_SHIELD	
15	HDMI	Shell	Shield	R1	1	31	5	1	TMDS_SHIELD	
16	HDMI	Shell	Shield	C1	1	32	5	4	TMDS_SHIELD	
						33	5	5	TMDS_SHIELD	
						34	5	8	TMDS_SHIELD	
						35	R1	2	TMDS_SHIELD	
						36	C1	2	TMDS_SHIELD	

CUSTOMER DRAWING



VTAC RCV TO HDMI
PCB ADAPTER

RELATIVE CONNECTOR POSITIONS AND WIRE
ROUTING ARE GENERIC AND MAY VARY WITH
PINOUT
DIMENSIONS ARE SHOWN AS:
[MILLIMETERS]
INCHES

DWG.NO.	510170113	REV B
SCALE 3:2	CAGE CODE 18117	SHEET 1 OF 1