

1U InterConnect Solutions



Features and Benefits

- Scalable solutions for 2, 4, and 6 module requirements
- 1U height offers maximum module positions in minimal rack space
- Latch-locking handles with two points of contact per handle for easy glide docking
- Guide pins guarantee consistent lead-in with every connection




- Table- or rack-mountable receivers
- Ideal for in-line test applications
- Variety of I/O options, including signal, power, coax, pneumatic and PCB
- 36 keying options available in S6
- Reliable connectivity beyond 20,000 cycles



2 Module Solution • S2 Receiver ▼

Specifications




Rotation Block Material	Powder Coated Aluminum
Frame Material	Powder Coated Aluminum
Handle Material	Nickel Plated Alloy Steel
Alignment Pins	Stainless Steel
Available Module Slots	2 positions
Cycle Life	20,000 cycles
Temperature	-55°C to 85°C

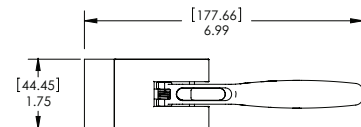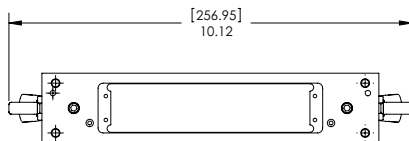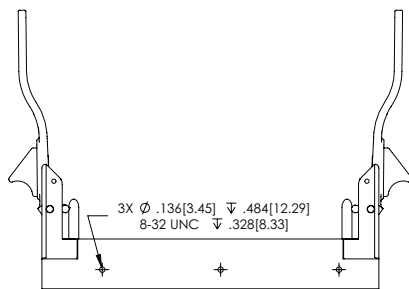

2 Module Solution • S2 ITA ▼

Specifications

Frame Material	Powder Coated Zinc Alloy
Available Module Slots	2 positions
Cycle Life	20,000 cycles
Temperature	-55°C to 85°C

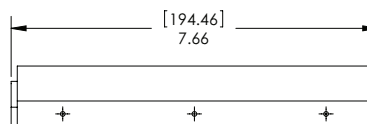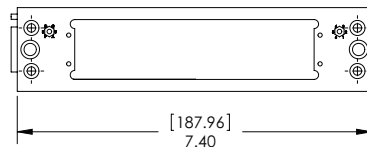

Part

Description

RECEIVER 310 122 109	Receiver, S2, 2 Module
ITA 410 122 109	ITA, S2, 2 Module