

InLine Solutions



Features and Benefits

- Scalable solutions for 2, 4, and 6 module requirements
- Latch-locking handles with two points of contact per handle for easy glide docking
- Guide pins guarantee consistent lead-in with every connection
- Table-mountable receiver




- 1U height offers maximum module positions in minimal rack space
- Variety of I/O options, including signal, power, coax, pneumatic and PCB
- 36 keying options available in S6
- Reliable connectivity beyond 20,000 cycles



2 Module Solution • S2 Receiver ▼

Specifications




Rotation Block Material	Powder Coated Aluminum
Frame Material	Powder Coated Aluminum
Handle Material	Nickel Plated Alloy Steel
Alignment Pins	Stainless Steel
Available Module Slots	2 positions
Cycle Life	20,000 cycles
Temperature	-55°C to 85°C

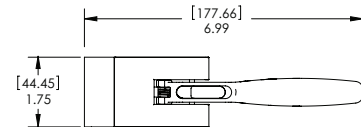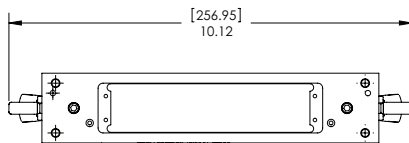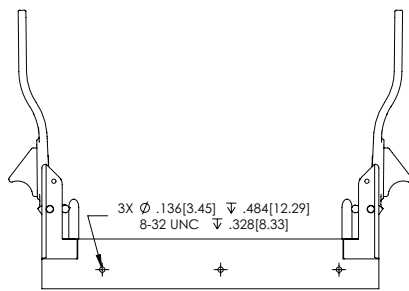

2 Module Solution • S2 ITA ▼

Specifications

Frame Material	Powder Coated Zinc Alloy
Available Module Slots	2 positions
Cycle Life	20,000 cycles
Temperature	-55°C to 85°C

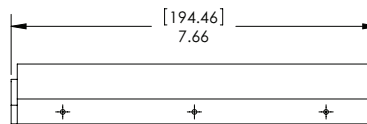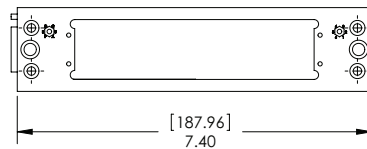

Part


Description

RECEIVER 310 122 109	Receiver, S2, 2 Module
ITA 410 122 109	ITA, S2, 2 Module

4 Module Solution • S4 Receiver ▼

Specifications


Rotation Block Material	Powder Coated Aluminum
Frame Material	Powder Coated Aluminum Alloy
Handle Material	Nickel Plated Alloy Steel
Alignment Pins	Stainless Steel
Available Module Slots	4 Positions
Cycle Life	20,000 Cycles
Temperature	-55° C to 85° C

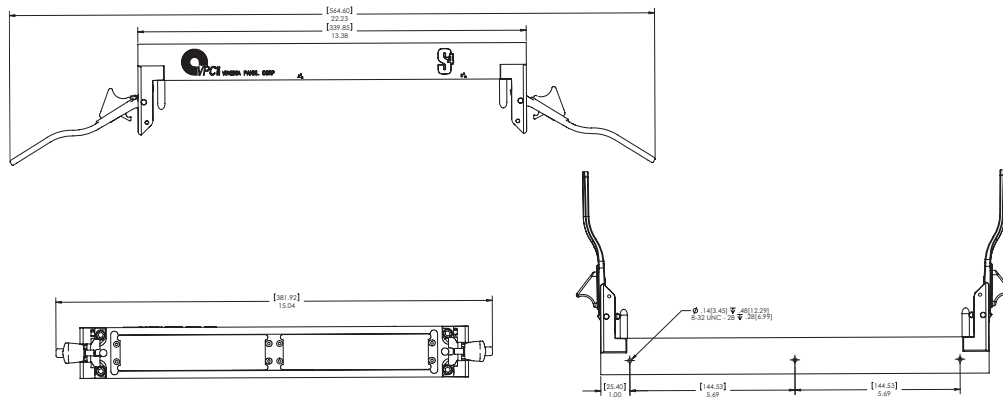

4 Module Solution • S4 ITA ▼

Specifications

Frame Material	Powder Coated Zinc Alloy
Available Module Slots	4 Positions
Cycle Life	20,000 Cycles
Temperature	-55° C to 85° C

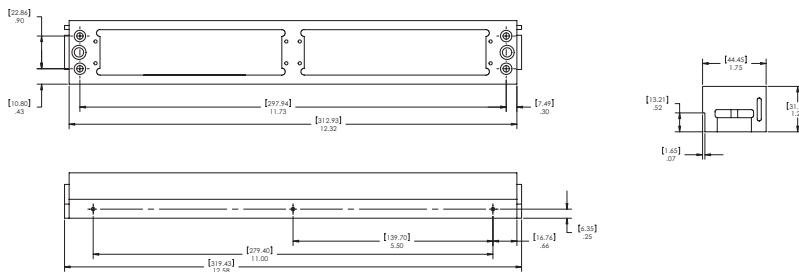

Part


Description

RECEIVER 310 122 106	Receiver, S4, 4 Module
ITA 410 122 106	ITA, S4, 4 Module

6 Module Solution • S6 Receiver ▼

Specifications


Rotation Block Material	Powder Coated Aluminum
Frame Material	Powder Coated Zinc Alloy
Handle Material	Nickel Plated Alloy Steel
Alignment Pins	Stainless Steel
Available Module Slots	6 Positions
Cycle Life	20,000 Cycles
Temperature	-55° C to 85° C

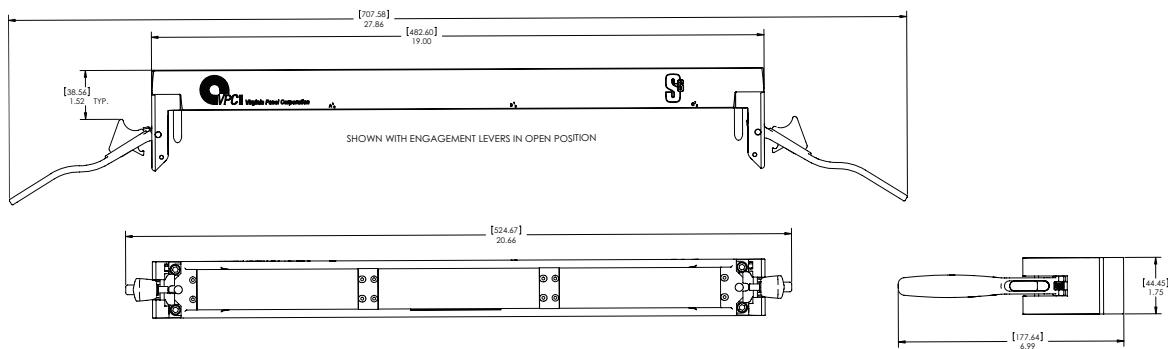

6 Module Solution • S6 ITA ▼

Specifications

Frame Material	Powder Coated Zinc Alloy
Available Module Slots	6 Positions
Cycle Life	20,000 Cycles
Temperature	-55° C to 85° C

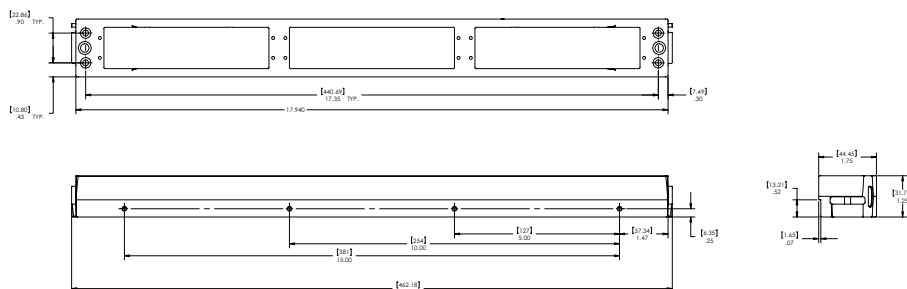

Part

Description

RECEIVER	
310 122 100	Receiver, S6, 6 Module
310 122 101	Receiver, S6, 6 Module with 15" Platform
310 122 108	Receiver, S6, 6 Module with 20" Platform
ITA	
410 122 100	ITA, S6, 6 Module with Protective Cover