




DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
C	ECN - #08-410-0054	4/3/08	R HERRON

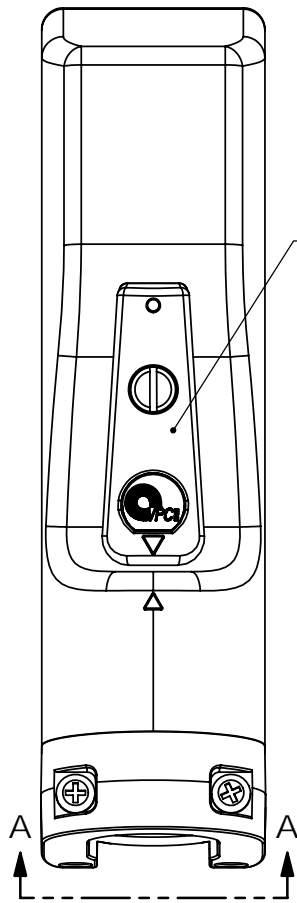


HANDLE SHOWN IN ENGAGED POSITION.
ROTATE 180° COUNTER-CLOCKWISE
FOR DISENGAGED POSITION.

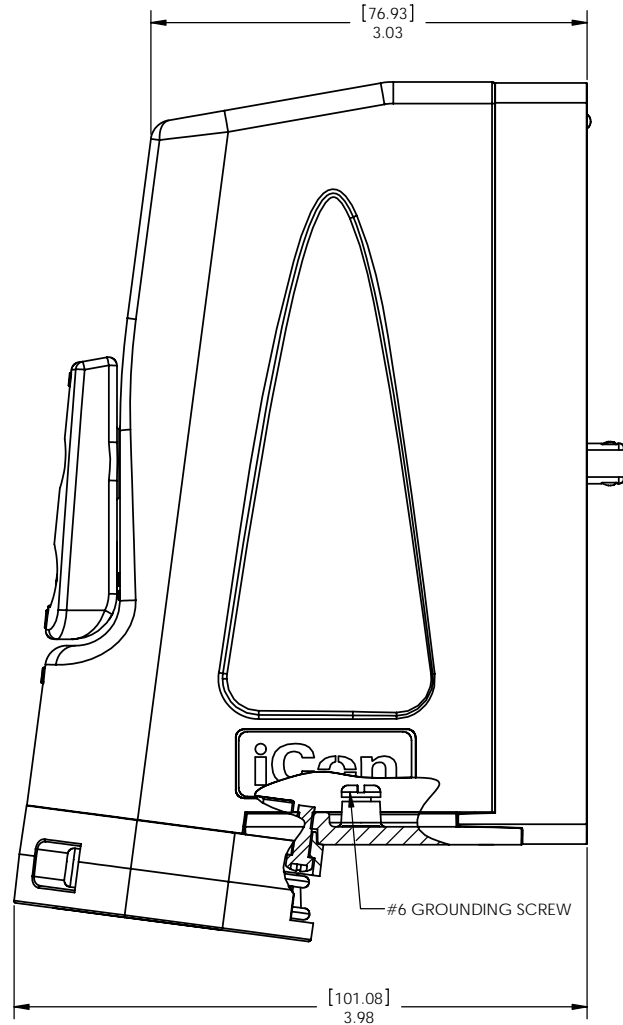

HEX CAVITY 2X FOR
OPTIONAL KEYING PINS
(KIT P/N 310113461)

MODULE
TIER "A"

MODULE
TIER "B"

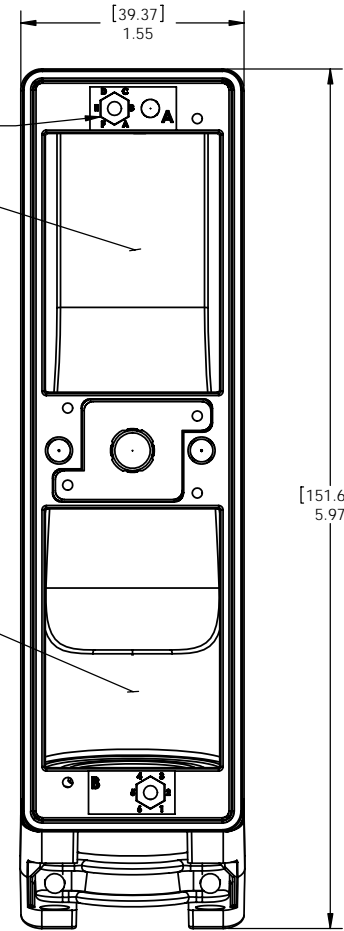

RCV MATING VIEW

4. MAX CABLE BUNDLE AREA = .92 SQ. IN.
CLAMP CAN BE INVERTED FOR SMALLER CABLE BUNDLES
3. PROTECTIVE COVER INCLUDED WITH ASSEMBLY (NOT SHOWN)

2. MATERIALS:
FRAME: ALUMINUM ALLOY - NI PLATED
HARDWARE: STAINLESS STEEL ALLOY
DRIVE UNIT: BRONZE ALLOY & STAINLESS STEEL ALLOY
PLASTIC COMPONENTS & PROTECTIVE COVER: BLACK THERMOPLASTIC
CABLE CLAMP: ALUMINUM ALLOY, POWDER COATED

1. FOR APPLICATION USE & CARE INFORMATION CONSULT VPC USERS GUIDE @WWW.VPC.COM

NOTES:

CUSTOMER DRAWING			
VIRGINIA PANEL CORPORATION WWW.VPC.COM			
ITA, ICON			
DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG. NO.
[MILLIMETERS]	C	18117	410123101
[INCHES]			
SCALE: 1:1	410123101	9/5/06	SHEET 1 OF 1