

4

3




2

1


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
F	ECN #12808	8/29/22	R HERRON

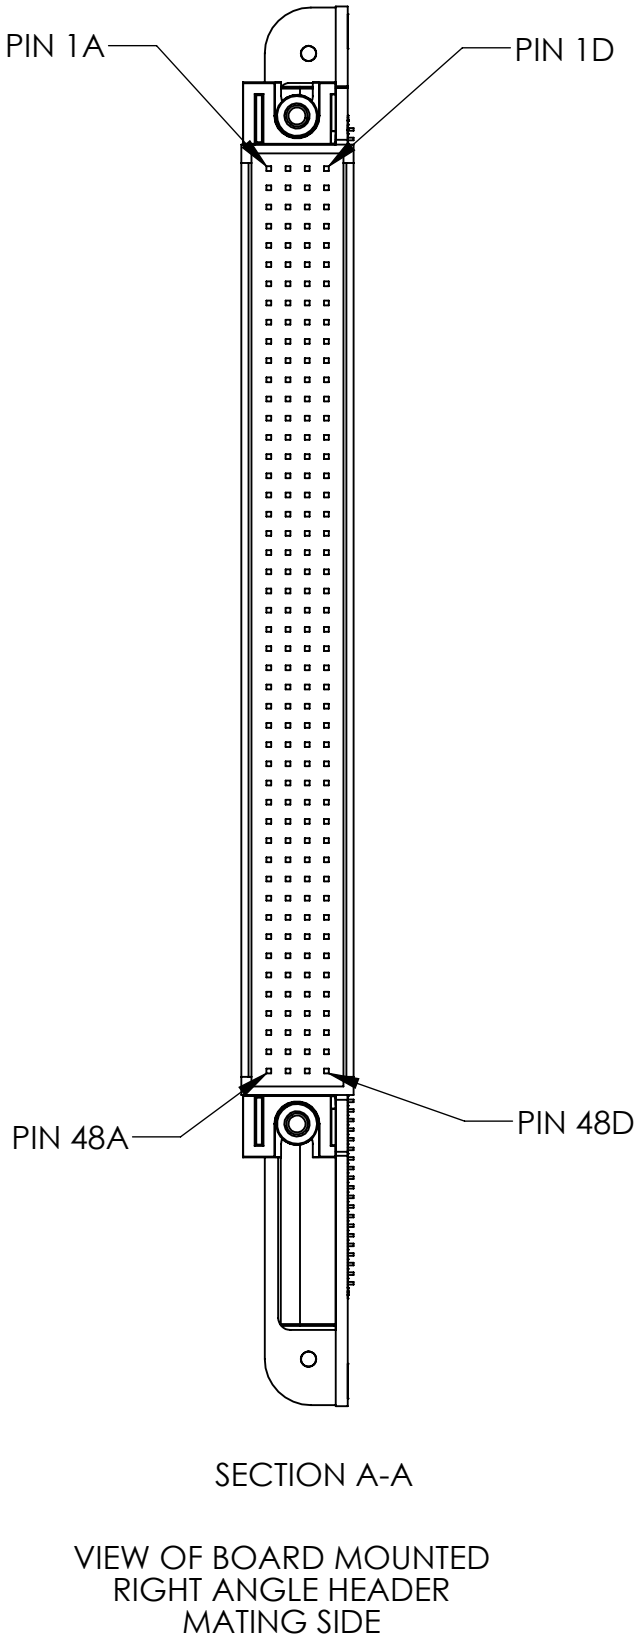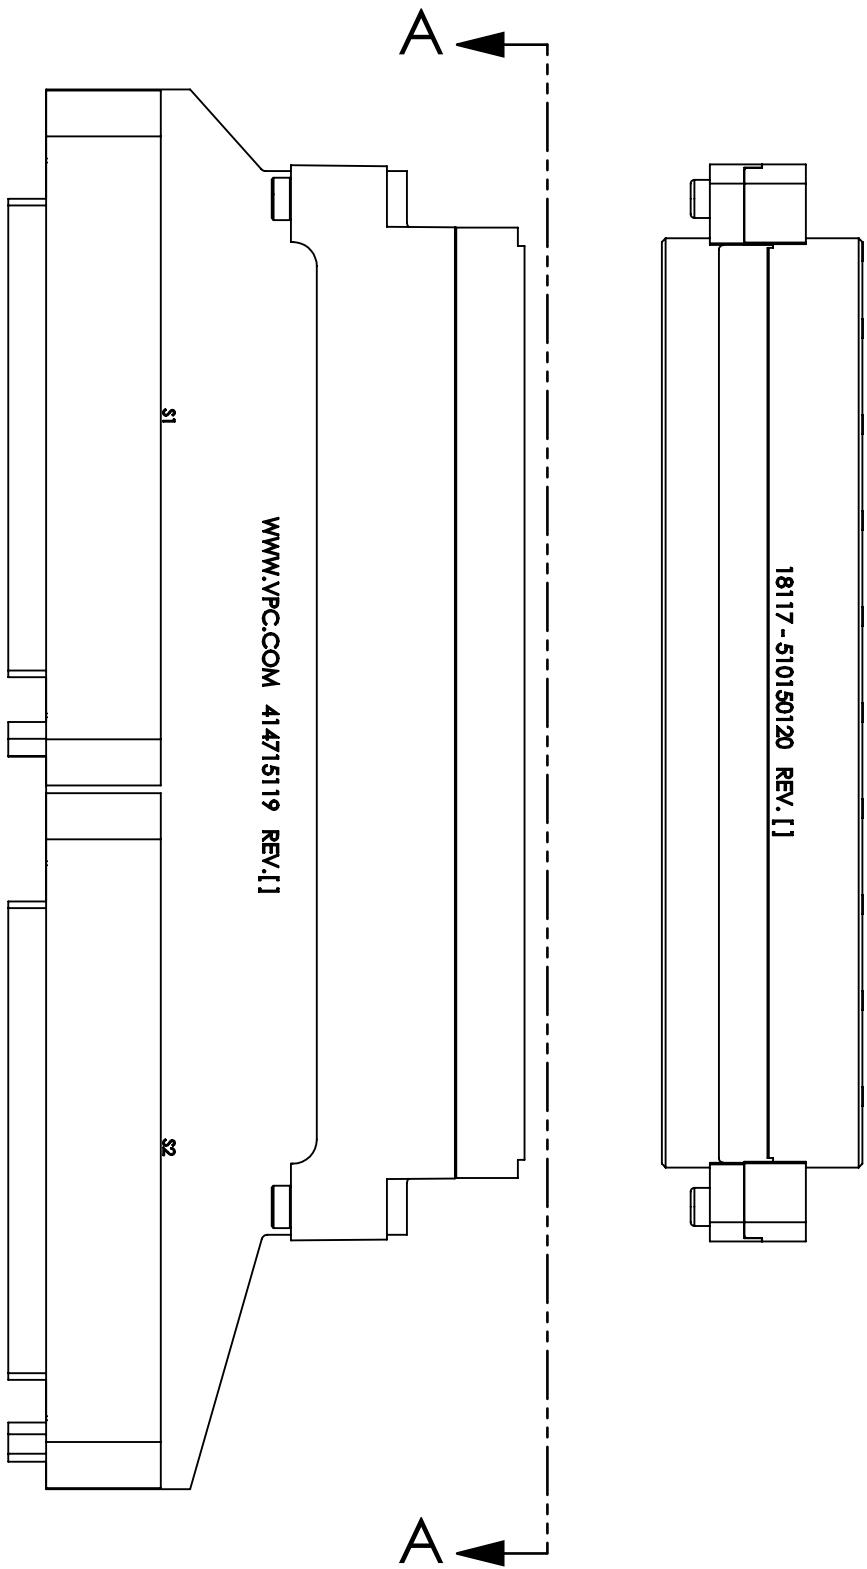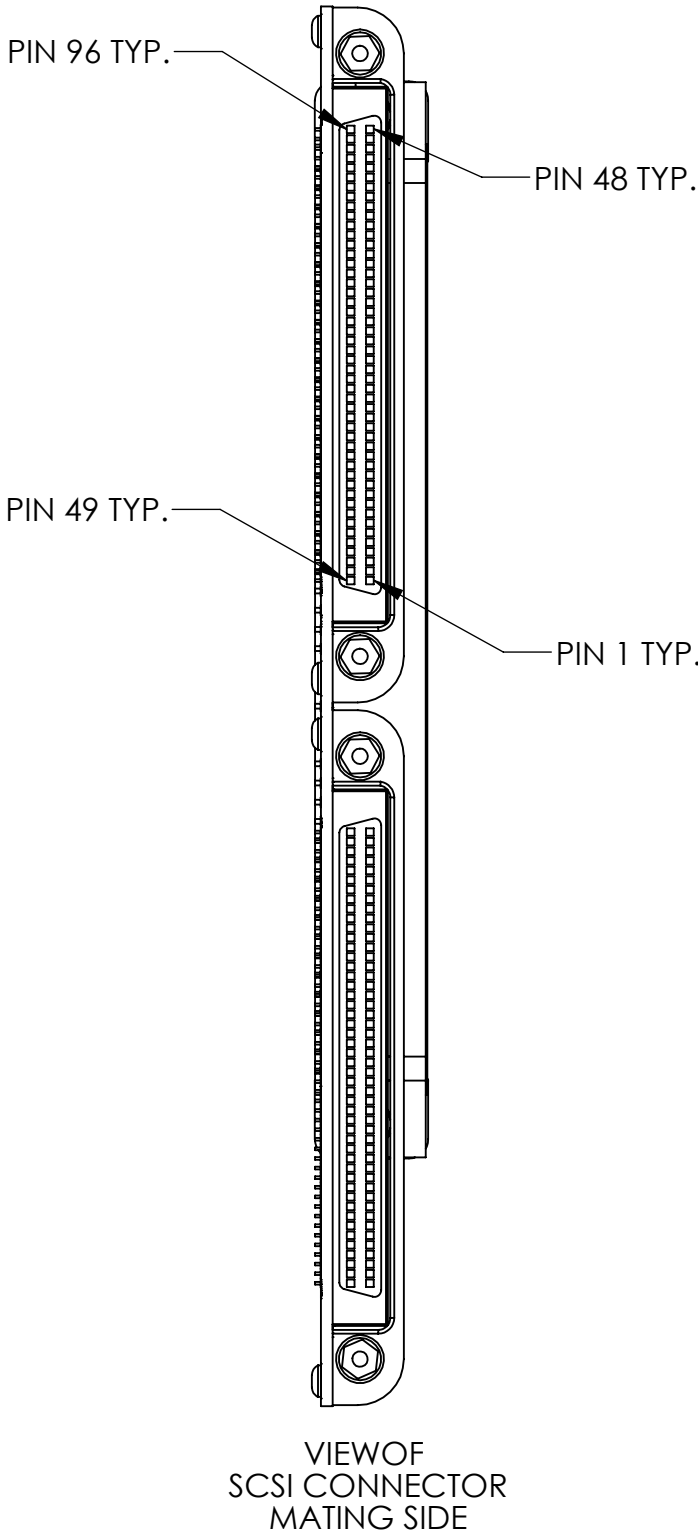

3. TECHNICAL DATA:
CURRENT = 1 AMP @ 150 V AC
TEMP = -55°C TO 105°C
INSULATION RESISTANCE = 1000 MΩ MIN. (DC 500 V)
DWV = AC 750 V FOR 1 MINUTE
2. MATERIALS:
CONNECTOR:
INSULATOR = POLYESTER (UL94V-0)
CONDUCTOR = COPPER ALLOY
CONTACT PLATING = CONTACT = GOLD
TERMINAL = PALLADIUM
- BOARD:
FR-4 w/ SOLDERMASK
1. FOR MORE INFORMATION VISIT VPC.COM
- NOTES:

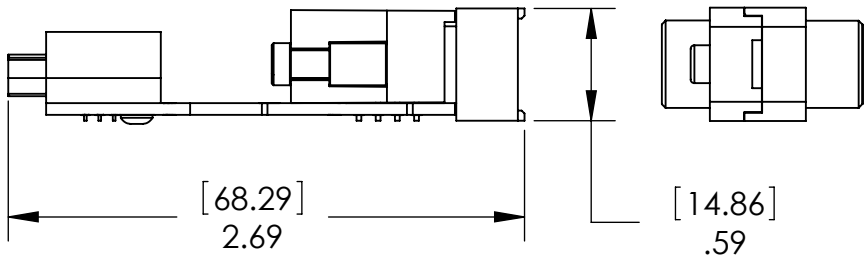

CUSTOMER DRAWING			
VIRGINIA PANEL CORPORATION			
WWW.VPC.COM			
192 RCV MOD RT ANG PCB			
W/ 2-96 SCSI ASSY			
SIZE	CAGE CODE	DWG. NO.	REV
C	18117	510150120	F
SCALE: 1:1	510150120	10/21/10	SHEET 1 OF 2

DIMENSIONS ARE SHOWN AS:
[MILLIMETERS]
INCHES

4

3

2

1

