

4

3

2

1





DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
J	ECN #12808	8/30/22	R HERRON

D

D

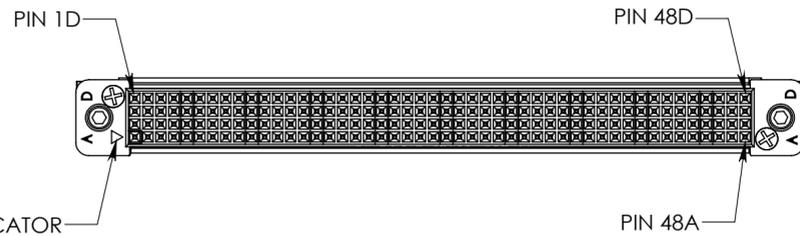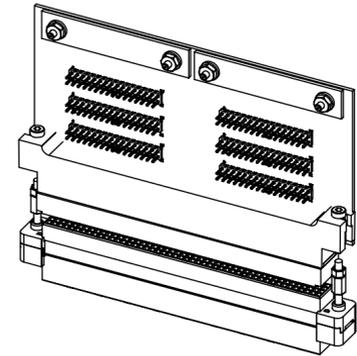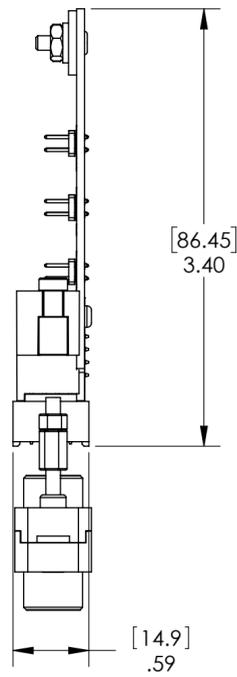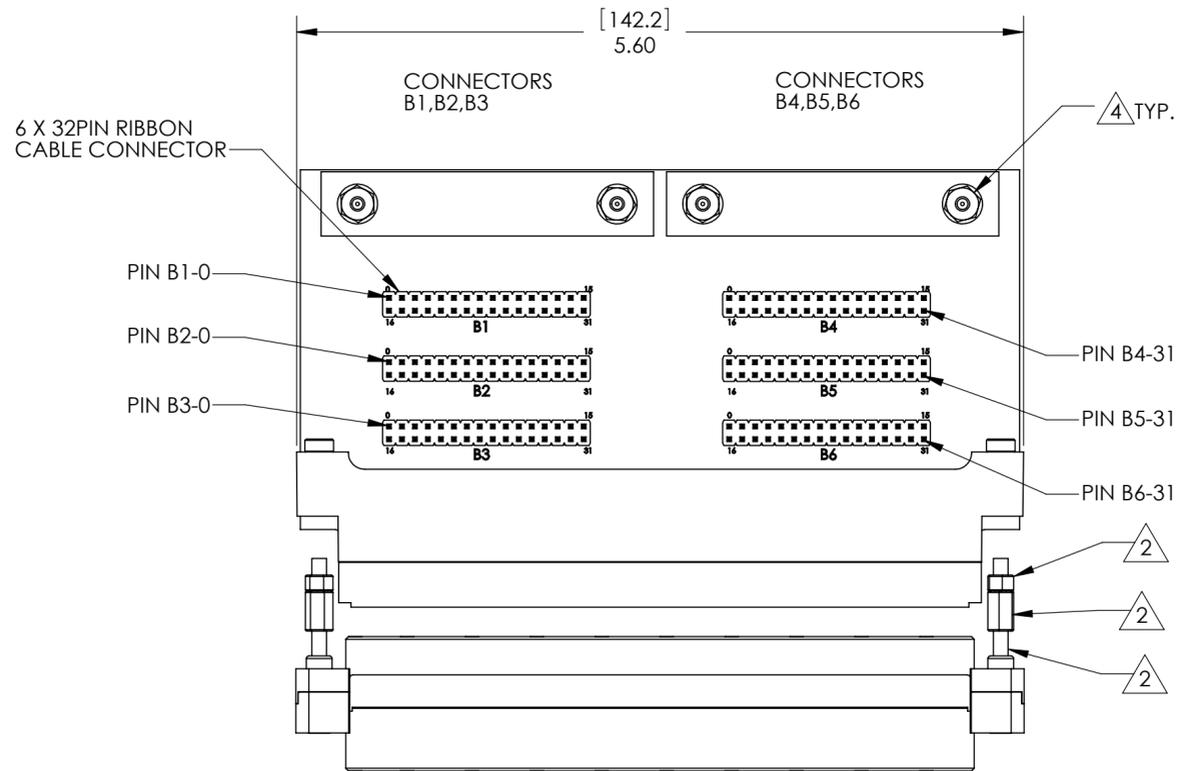

SIGNAL TRACES											
A1 > B2-16	A25 > B3-24	B1 > B2-0	B25 > B3-8	C1 > B1-16	C25 > B6-24	D1 > B1-0	D25 > B6-8				
A2 > B2-17	A26 > B3-25	B2 > B2-1	B26 > B3-9	C2 > B1-17	C26 > B6-25	D2 > B1-1	D26 > B6-9				
A3 > B2-18	A27 > B3-26	B3 > B2-2	B27 > B3-10	C3 > B1-18	C27 > B6-26	D3 > B1-2	D27 > B6-10				
A4 > B2-19	A28 > B3-27	B4 > B2-3	B28 > B3-11	C4 > B1-19	C28 > B6-27	D4 > B1-3	D28 > B6-11				
A5 > B2-20	A29 > B3-28	B5 > B2-4	B29 > B3-12	C5 > B1-20	C29 > B6-28	D5 > B1-4	D29 > B6-12				
A6 > B2-21	A30 > B3-29	B6 > B2-5	B30 > B3-13	C6 > B1-21	C30 > B6-29	D6 > B1-5	D30 > B6-13				
A7 > B2-22	A31 > B3-30	B7 > B2-6	B31 > B3-14	C7 > B1-22	C31 > B6-30	D7 > B1-6	D31 > B6-14				
A8 > B2-23	A32 > B3-31	B8 > B2-7	B32 > B3-15	C8 > B1-23	C32 > B6-31	D8 > B1-7	D32 > B6-15				
A9 > B2-24	A33 > B5-16	B9 > B2-8	B33 > B5-0	C9 > B1-24	C33 > B4-16	D9 > B1-8	D33 > B4-0				
A10 > B2-25	A34 > B5-17	B10 > B2-9	B34 > B5-1	C10 > B1-25	C34 > B4-17	D10 > B1-9	D34 > B4-1				
A11 > B2-26	A35 > B5-18	B11 > B2-10	B35 > B5-2	C11 > B1-26	C35 > B4-18	D11 > B1-10	D35 > B4-2				
A12 > B2-27	A36 > B5-19	B12 > B2-11	B36 > B5-3	C12 > B1-27	C36 > B4-19	D12 > B1-11	D36 > B4-3				
A13 > B2-28	A37 > B5-20	B13 > B2-12	B37 > B5-4	C13 > B1-28	C37 > B4-20	D13 > B1-12	D37 > B4-4				
A14 > B2-29	A38 > B5-21	B14 > B2-13	B38 > B5-5	C14 > B1-29	C38 > B4-21	D14 > B1-13	D38 > B4-5				
A15 > B2-30	A39 > B5-22	B15 > B2-14	B39 > B5-6	C15 > B1-30	C39 > B4-22	D15 > B1-14	D39 > B4-6				
A16 > B2-31	A40 > B5-23	B16 > B2-15	B40 > B5-7	C16 > B1-31	C40 > B4-23	D16 > B1-15	D40 > B4-7				
A17 > B3-16	A41 > B5-24	B17 > B3-0	B41 > B5-8	C17 > B6-16	C41 > B4-24	D17 > B6-0	D41 > B4-8				
A18 > B3-17	A42 > B5-25	B18 > B3-1	B42 > B5-9	C18 > B6-17	C42 > B4-25	D18 > B6-1	D42 > B4-9				
A19 > B3-18	A43 > B5-26	B19 > B3-2	B43 > B5-10	C19 > B6-18	C43 > B4-26	D19 > B6-2	D43 > B4-10				
A20 > B3-19	A44 > B5-27	B20 > B3-3	B44 > B5-11	C20 > B6-19	C44 > B4-27	D20 > B6-3	D44 > B4-11				
A21 > B3-20	A45 > B5-28	B21 > B3-4	B45 > B5-12	C21 > B6-20	C45 > B4-28	D21 > B6-4	D45 > B4-12				
A22 > B3-21	A46 > B5-29	B22 > B3-5	B46 > B5-13	C22 > B6-21	C46 > B4-29	D22 > B6-5	D46 > B4-13				
A23 > B3-22	A47 > B5-30	B23 > B3-6	B47 > B5-14	C23 > B6-22	C47 > B4-30	D23 > B6-6	D47 > B4-14				
A24 > B3-23	A48 > B5-31	B24 > B3-7	B48 > B5-15	C24 > B6-23	C48 > B4-31	D24 > B6-7	D48 > B4-15				

D1	PINNED HEADER (0-31) B1	PINNED HEADER (0-31) B6	PINNED HEADER (0-31) B4	D48
C1				C48
B1	PINNED HEADER (0-31) B2	PINNED HEADER (0-31) B3	PINNED HEADER (0-31) B5	B48
A1				A48

5. WHEN LOADING PCBs SIDE-BY-SIDE SOLDER TAILS COULD INTERFERE WITH ADJACENT PCBs.

4 LIMIT TORQUE TO 4 IN-LBS MAXIMUM ON NUTS

3. TECHNICAL DATA:
 MATERIAL : BOARD FR-4 w/SOLDERMASK
 VPC CONNECTOR BLACK LCP w/GOLD PLATED BERYLIUM COPPER CONTACTS
 BOARD CONNECTOR BLACK LCP w/GOLD PLATED PHOSPHOR BRONZE POSTS
 CURRENT: 3 AMPERE CONTINUOUS PER TRACE

2 ITEMS SHIPPED LOOSE
 (QTY 2) 4-40X.31" THREADED STANDOFF
 (QTY 2) 4-40X1.25" SOCKETHEAD CAP SCREW
 (QTY 2) 4-40X.13" THREADED STANDOFF

1. FOR MORE INFORMATION VISIT VPC.COM

NOTES:

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION
WWW.VPC.COM

192 RCV MOD RT ANG PCB ADPTR

DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG. NO.	REV
[MILLIMETERS]	C	18117	510150155	J
[INCHES]	SCALE: NONE	510150155	10/11/07	SHEET 1 OF 1

4

3

2

1

C

C

B

B

A

A