


G¹²



- Low profile solution
- Modular & reconfigurable
- Optimal for tabletop and slide-mount applications
- Ideal for commercial, contract, manufacturing, automotive, and other high-volume testing environments

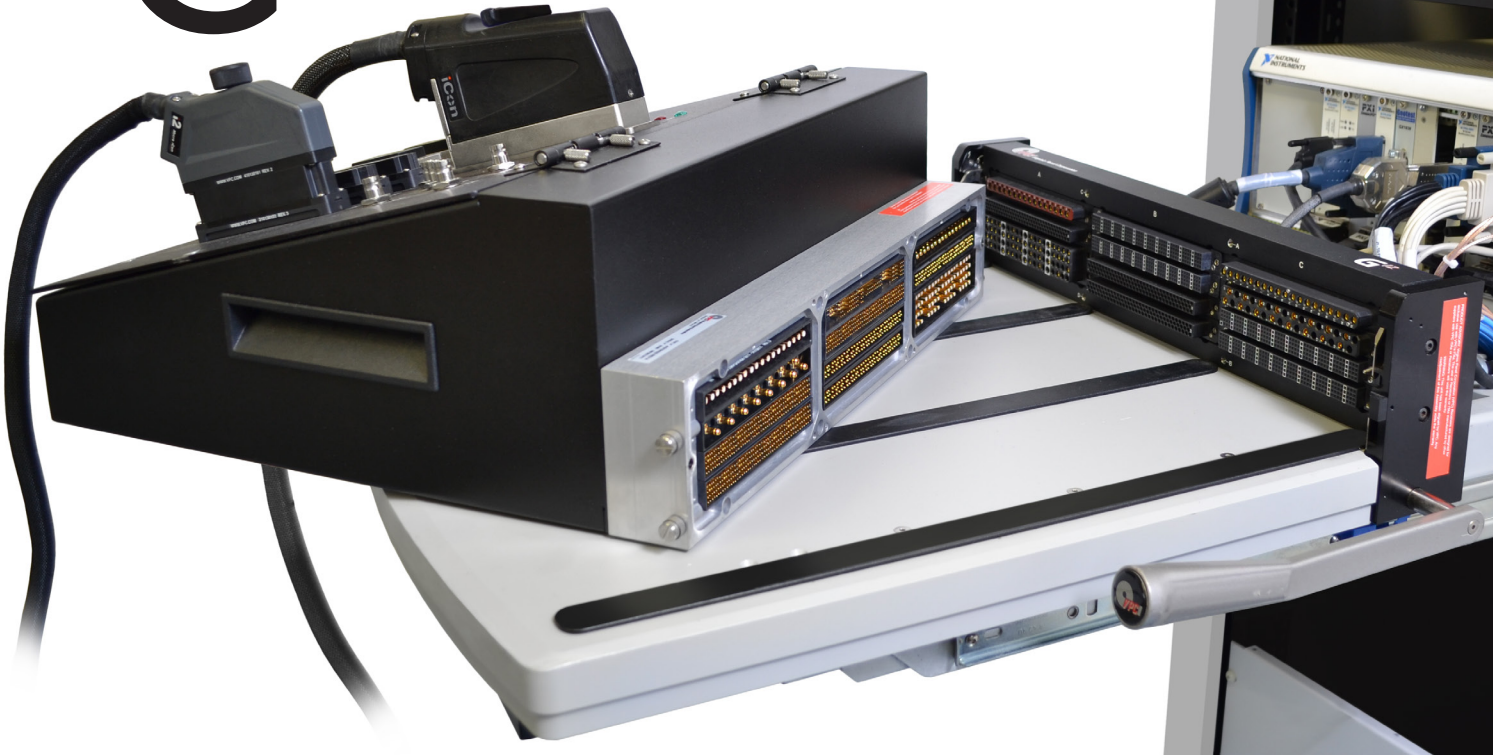


Specifications

- Available with a 15" or 20" platform
- QuadraTrack™ engagement maintains precise signal integrity
- 20,000 mating cycles
- 4U height with rack mount
- Unique engagement handle to satisfy different mounting requirements

VPC recommends leaving room for future expansion with the G12x, an 18 module solution.
Compatible with G12 ITA.



G12 Slide Configuration with Accessories

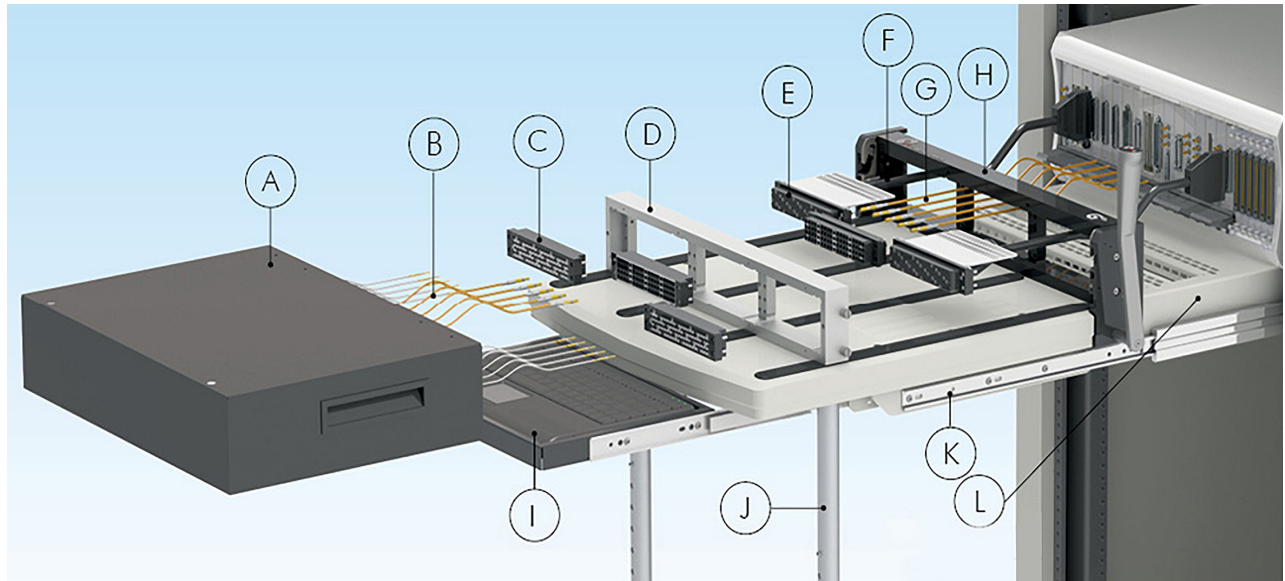

A. ITA Enclosure
B. ITA Patchcords
C. ITA Modules

D. G12 ITA
E. Receiver Module
F. Cable Assembly

G. Receiver Patchcords
H. G12 Receiver with Platform
I. Keyboard Tray Kit

J. Adjustable Leg Kit
K. Slide Kit
L. Instrument Bracket

Multiple I/O Options

12 module positions configurable for:

- Signal
- Coax/RF
- Power
- Vacuum
- High Speed
- Pneumatic
- Thermocouple
- Fiber Optic
- Twinaxial



Rapid Integration

Combined with VPC's QuadraPaddle™ signal contacts and modules, the G12 reduces integration time by allowing use of industry standard .100" (2.54 mm) pitch COTS connectors, cable assemblies and other interconnect products.



NORTH & SOUTH AMERICA
1400 New Hope Road
Waynesboro, VA 22980
United States
Phone +1 540 932 3300
vpc.com/contact-us/

EUROPE & MIDDLE EAST
Auenstrasse 56
80469 Munich
Germany
Phone +49 173 20 15 082
info.emea@vpc.com

ASIA & AUSTRALIA
7/C Fook Sing Mansion
16-22 Shun Yung Street
Hung Hom, Kowloon
Hong Kong
Phone +852 2356 8635
info.asia@vpc.com