


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.	REV	DESCRIPTION	DATE	ENGINEER
	A	ORIGINAL RELEASE #12606	5/25/2022	L SALE

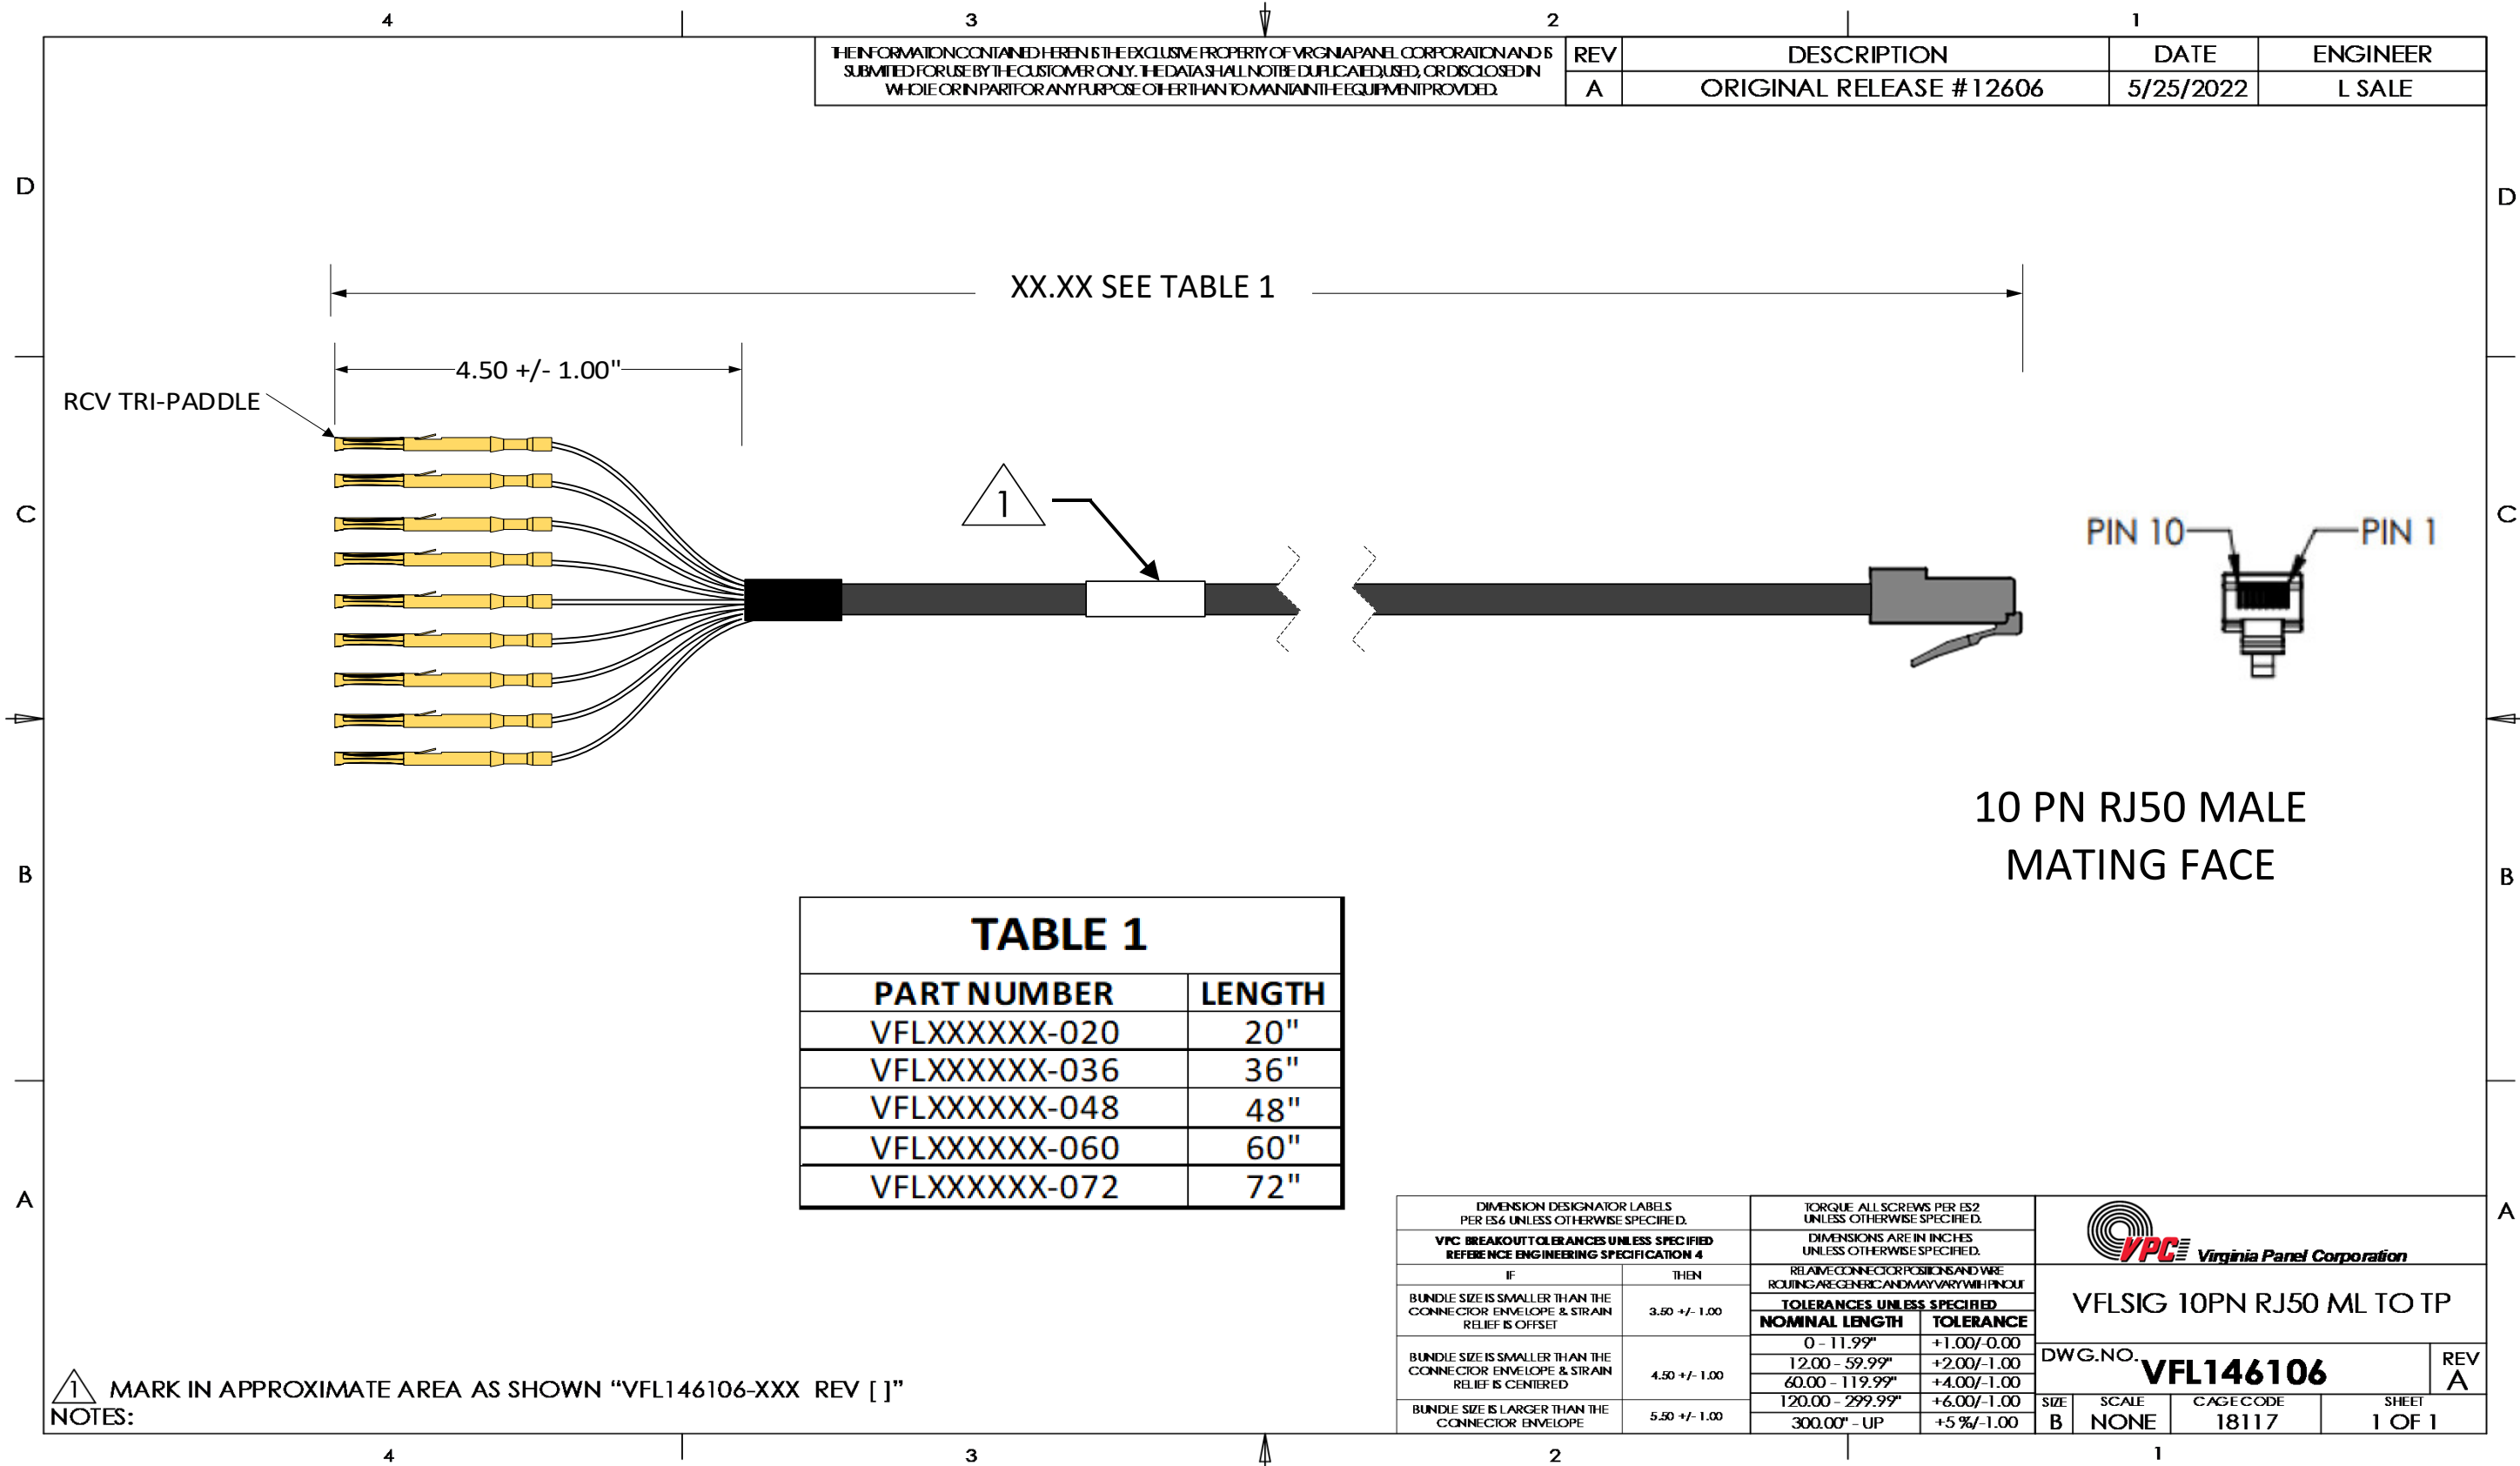

Run #	From Location (Pin)	From Signal Desc RS232	From Signal Desc (RS422 / RS485)	Wire AWG	Wire Color	Wire Group (PAIR)	To Location (Conn-Pin)
1	1	NC	NC	28	N/C	-	610110167
2	2	R1*	TXD-	↑	GRY	-	610110167
3	3	CTS	TXD+	28	PUR	-	610110167
4	4	RTS	RTS-(HSO-)	↑	BLU	-	610110167
5	5	DSR*	CTS-(HSI-)	28	GRN	-	610110167
6	6	GND	RXD-	↑	YEL	-	610110167
7	7	DTR*	RXD+	28	ORG	-	610110167
8	8	TXD	RTS+(HSO+)	↑	RED	-	610110167
9	9	RXD	CTS+(HSI+)	28	BRN	-	610110167
10	10	DCD*	GND	↑	BLK	-	610110167
11	SHIELD	SHLD	SHLD	26	SHLD	-	610110167
*		These signals are “No Connect” on the PCI-232I and PXI-8422 ports					*