



DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

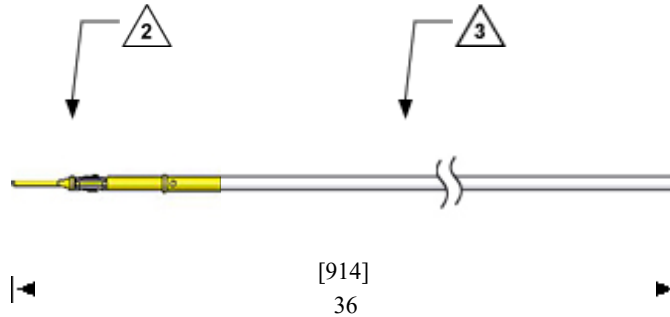

5. Maximum Operating Current = 3 Amps

 24 AWG WHITE XLPVC M16878/1 TYPE B UNTERMINATED

 SIGNAL, ITA, QUADRAPADDLE, 5 AMP, 22-24 AWG

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS MANUAL @ WWW.VPC.COM

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

CUSTOMER DRAWING		
VIRGINIA PANEL CORPORATION		
WWW.VPC.COM		
Signal Patchcord, ITA, QuadraPaddle, 36", 24 AWG White XLPVC, Single Ended, (3 Amps)		
SIZE	CAGE CODE	PART# 7-121 964 000-036
A	18117	
SCALE: NONE	DATE: 10/22/2021	SHEET 1 OF 1