


DRAWING NOT TO SCALE  
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

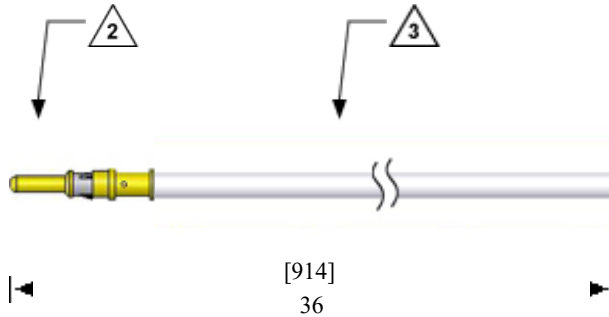

5. Maximum Operating Current = 22 Amps
- 3 12 AWG WHITE TEFLON M16878/4-BLE-9 UNTERMINATED
  - 2 MICRO POWER, ITA, 12 AWG

NOTES:

DIMENSIONS ARE SHOWN AS  
[MILLIMETERS]  
INCHES

|   |                  |                              |
|---|------------------|------------------------------|
| CUSTOMER DRAWING  |                  |                              |
| VPC Patchcord Designer  |                  |                              |
| WWW.VPC.COM   |                  |                              |
| Power Patchcord, ITA, Micro Power, 36", 12 AWG White<br>Teflon, Single Ended, (22 Amps) |                  |                              |
| SIZE  | CAGE CODE        | <b>PART#</b> 7-251912000-036 |
| A   | 18117            |                              |
| SCALE: NONE   | DATE: 08/12/2024 | SHEET 1 OF 1                 |