


DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.



- 6. Insertion Loss = -2.738 db max
- 5. Maximum Operating Frequency = 1 GHz
- 4. SMA PLUG
- 3. RG316 TAN M17/113 (50 OHM, 3 GHZ)
- 2. MINI COAX, RECEIVER, 1 GHZ

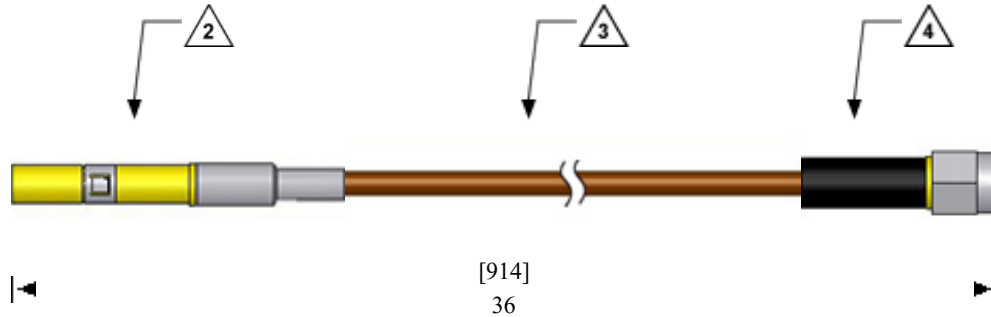

CUSTOMER DRAWING

VPC Patchcord Designer

WWW.VPC.COM

Coax Patchcord, Receiver, Mini Coax, 36", RG316 Tan, to SMA Plug, (1 GHz)

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

SIZE	CAGE CODE
A	18117

PART# 7-332 116 525-036

SCALE: NONE

DATE: 07/22/2024

SHEET 1 OF 1