


DRAWING NOT TO SCALE  
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION  
AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR  
DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT  
PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

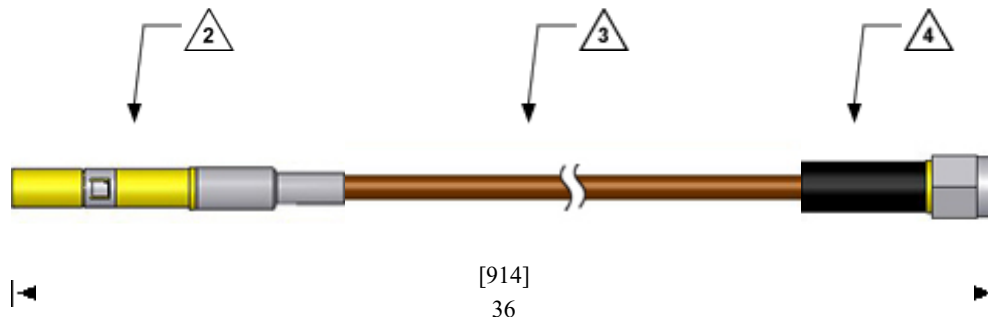

6. Insertion Loss = -2.738 db max  
5. Maximum Operating Frequency = 1 GHz  
4. SMA PLUG  
3. RG316 TAN M17/113 (50 OHM, 3 GHZ)  
2. MINI COAX, RECEIVER, 1 GHZ

NOTES:

DIMENSIONS ARE SHOWN AS  
[MILLIMETERS]  
INCHES

CUSTOMER DRAWING		
VPC Patchcord Designer		
WWW.VPC.COM		
Coax Patchcord, Receiver, Mini Coax, 36", RG316 Tan, to SMA Plug, (1 GHz)		
SIZE	CAGE CODE	PART# 7-332 116 525-036
A	18117	
SCALE: NONE	DATE: 05/01/2025	SHEET 1 OF 1