


DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION
AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR
DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT
PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

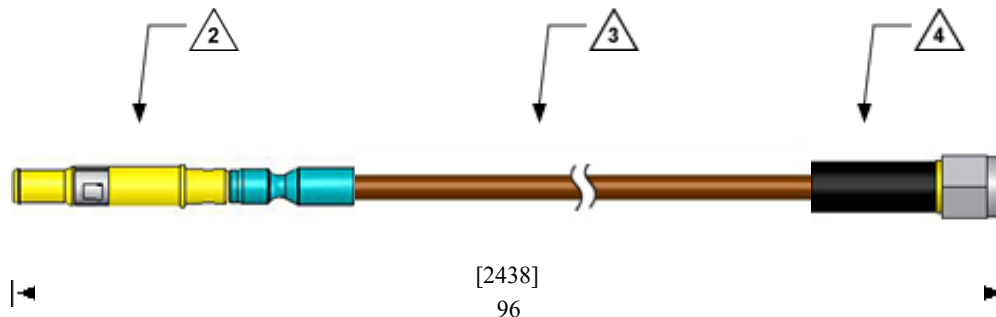

6. Insertion Loss = -4.803 db max
5. Maximum Operating Frequency = 2 GHz
4. SMA PLUG
3. RG316 TAN M17/113 (50 OHM, 3 GHZ)
2. MINI COAX, ITA, SOLDER SLEEVE, 2 GHZ

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

CUSTOMER DRAWING		
VPC Patchcord Designer		
WWW.VPC.COM		
Coax Patchcord, ITA, Mini Coax, Solder Sleeve, 96", RG316 Tan, to SMA Plug, (2 GHz)		
SIZE A	CAGE CODE 18117	PART# 7-339 116 525-096
SCALE: NONE		DATE: 03/28/2024
		SHEET 1 OF 1