


DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.



- 6. Insertion Loss = -4.803 db max
- 5. Maximum Operating Frequency = 2 GHz
- 4. SMA PLUG
- 3. RG316 TAN M17/113 (50 OHM, 3 GHZ)
- 2. MINI COAX, ITA, SOLDER SLEEVE, 2 GHZ

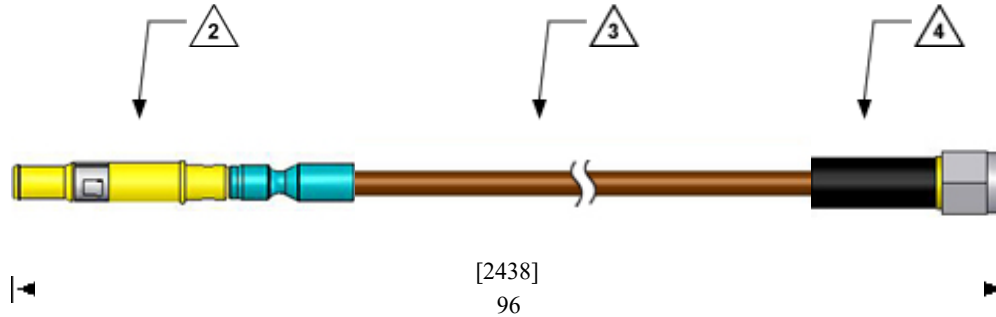

CUSTOMER DRAWING

VPC Patchcord Designer

WWW.VPC.COM

Coax Patchcord, ITA, Mini Coax, Solder Sleeve, 96", RG316
Tan, to SMA Plug, (2 GHz)

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

SIZE	CAGE CODE
A	18117

PART# 7-339 116 525-096

SCALE: NONE

DATE: 04/28/2026

SHEET 1 OF 1