


DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION
AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR
DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT
PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

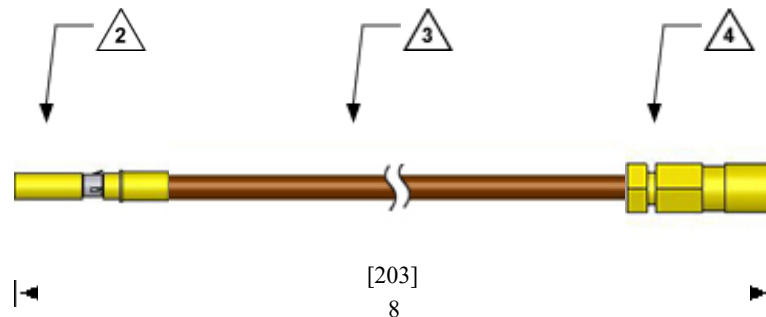

6. Insertion Loss = -1.364 db max
5. Maximum Operating Frequency = 3 GHz
4. SMB PLUG
3. RG316 TAN M17/113 (50 OHM, 3 GHZ)
2. MICRO COAX, RECEIVER, 3 GHZ

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

SIZE CAGE CODE
A 18117

SCALE: NONE

DATE: 05/01/2024

SHEET 1 OF 1

CUSTOMER DRAWING

VPC Patchcord Designer

WWW.VPC.COM

Coax Patchcord, Receiver, Micro Coax, 8", RG316 Tan, to SMB
Plug, (3 GHz)

PART# 7-362 116 527-008