

Image: second	2					٦
	EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.	REV DESCI		DATE	ENGR	-
[20.55] 81 [6.02] .24 CUSTOMER DRAWING VIRGINIA PANEL CORPORATION WWW.VPC.COM i2 HYBRID RCV ASM, 120/12 W/ CONTACTS [MILLIMETERS] SIZE CAGE CODE [MILLIMETERS]	2-56 MOU SUPPLIED.	G ECN #13954		1/24/24 [12.70] .50 [6.34] .25 [50.4 1.9 [22.86] .90 [18.42] .73 [8.2 .33	R HERRON 04] 07 26] 3	D
			VIRGINIA PAN i2 HYBRID R W/ CO	el corp CV ASM ONTAC	ORATION www.vpc.com , 120/12 CTS 104	

4

4


D

В

A

TOLERANCES ARE: .XX = ±[.25].01 .XXX = ±[.13] .005 UNLESS OTHERWISE SPECIFIED

PANEL MOUNTING DETAIL

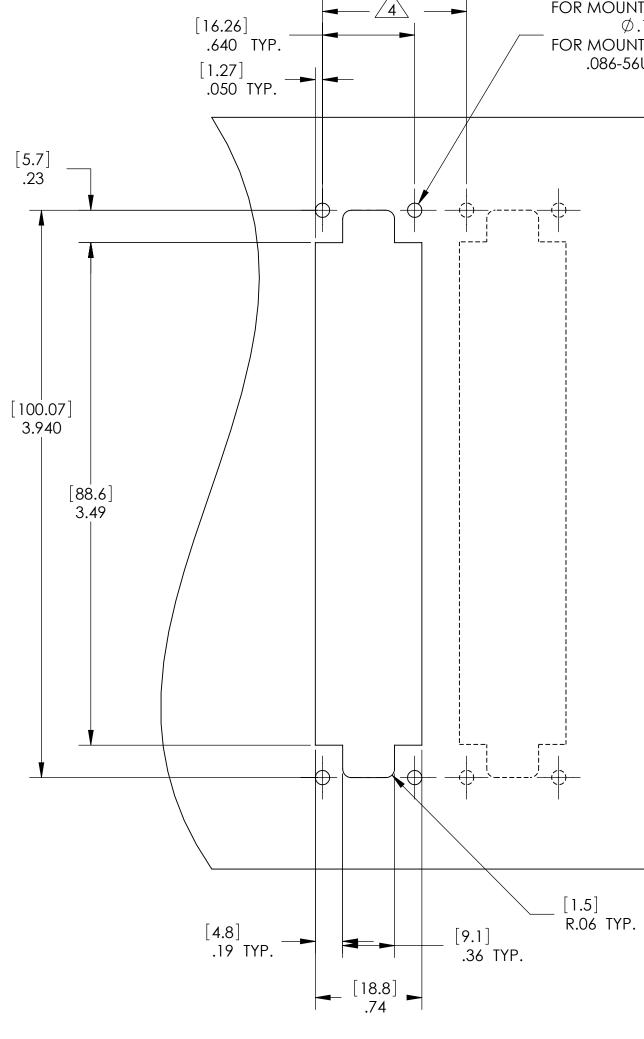

З

З

FOR MOUNTING PLATES .09" THICK OR LESS Ø.100 THRU, TYP. 4 PLCS FOR MOUNTING PLATES THICKER THAN .09" .086-56UNC-2B THRU, TYP. 4 PLCS.



TABLE 1										
PART NUMBER				DESCRIPTION			RECEIVER CUTOUT SPACING			
	410130101	ITA, i2	2 Mic	ro iCon, 168	3 Positior	ר	1.00 [25.40]			
410130104 ITA, i2 Mic			ro iCon, 120/12 Position Hybrid			1.00 [25.40]		40]		
	410130106	ITA, i2 Micro iCon, 168 Position with Oversized Backshell				2.19[55.63]		3]		
410130115 ITA, i2 Micro iCon, 120/12 Posit with Oversized Backsh					Position H ckshell	lybrid	2.19[55.63]			
	*SPACING IS APPLICATIO	ON SPECIFIC, .8	O" MII	VIMUM, 1.00" F	RECOMME	ENDED	1			
	USIVE PROPERTY OF VPC AN		size C	CAGE CODE 18117	DWG		01301	04	REV G	
TH	IAN TO MAINTAIN THE EQUIP	SCA	ALE: NONE 3	1013010	4	4/5/11	SHEET	2 OF 2		

٦

٦

D

С

В

2