
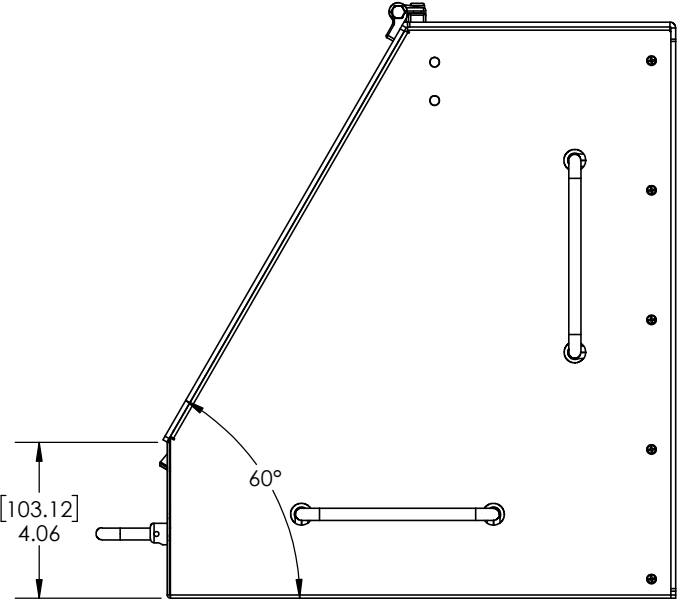


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

REV	DESCRIPTION	DATE	ENGINEER
B	ECN #8297	5/23/2018	L LOCKRIDGE

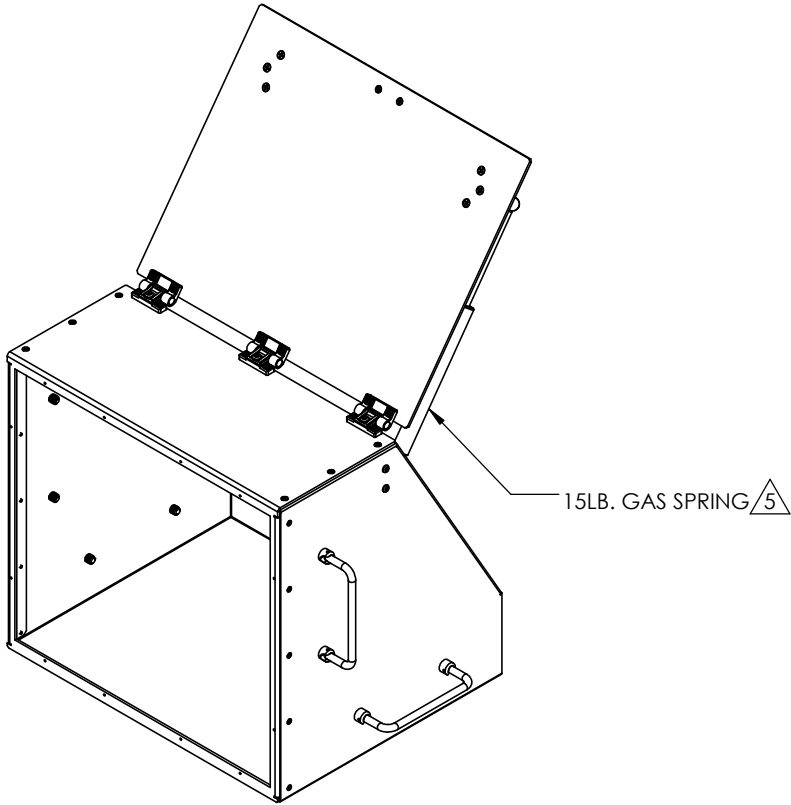

- 5 THE ENCLOSURE HOUSING AND COVER INCLUDE THE NECESSARY MOUNTING HOLES TO INSTALL THE GAS SPRING ON EITHER SIDE OF THE ENCLOSURE. REMOVE THE SPRING AND MOUNTING HARDWARE AND RE-INSTALL ON THE OPPOSITE SIDE OF DESIRED.
- 4 AS AN ALTERNATIVE TO THE SPRING PLUNGER LATCH, THE INCLUDED M3 X 10 SOCKET HEAD CAP SCREW CAN BE USED TO LOCK THE ENCLOSURE COVER IN THE CLOSED POSITION.
3. MATERIAL SPECIFICATIONS:
ENCLOSURE - POWDER COATED & ANODIZED ALUMINUM ALLOY
HARDWARE - STAINLESS STEEL
HANDLES - STAINLESS STEEL
2. ITA MOUNTING HARDWARE INCLUDED. QTY 12, 4-40 x 1.00" SHC SCREWS
1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM
- NOTES:

CUSTOMER DRAWING



ENCL ITA 9050
VXi SLOPED

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT

DIMENSIONS ARE SHOWN AS:
[MILLIMETERS]
INCHES

DWG.NO.	410114359	REV	B
SCALE	1:5	CAGE CODE	18117
SHEET	1 OF 2		

