

4

3

2

1

DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
H	ECN #8972	3/20/19	R HERRON

D

D

C


C

B

B

A

A

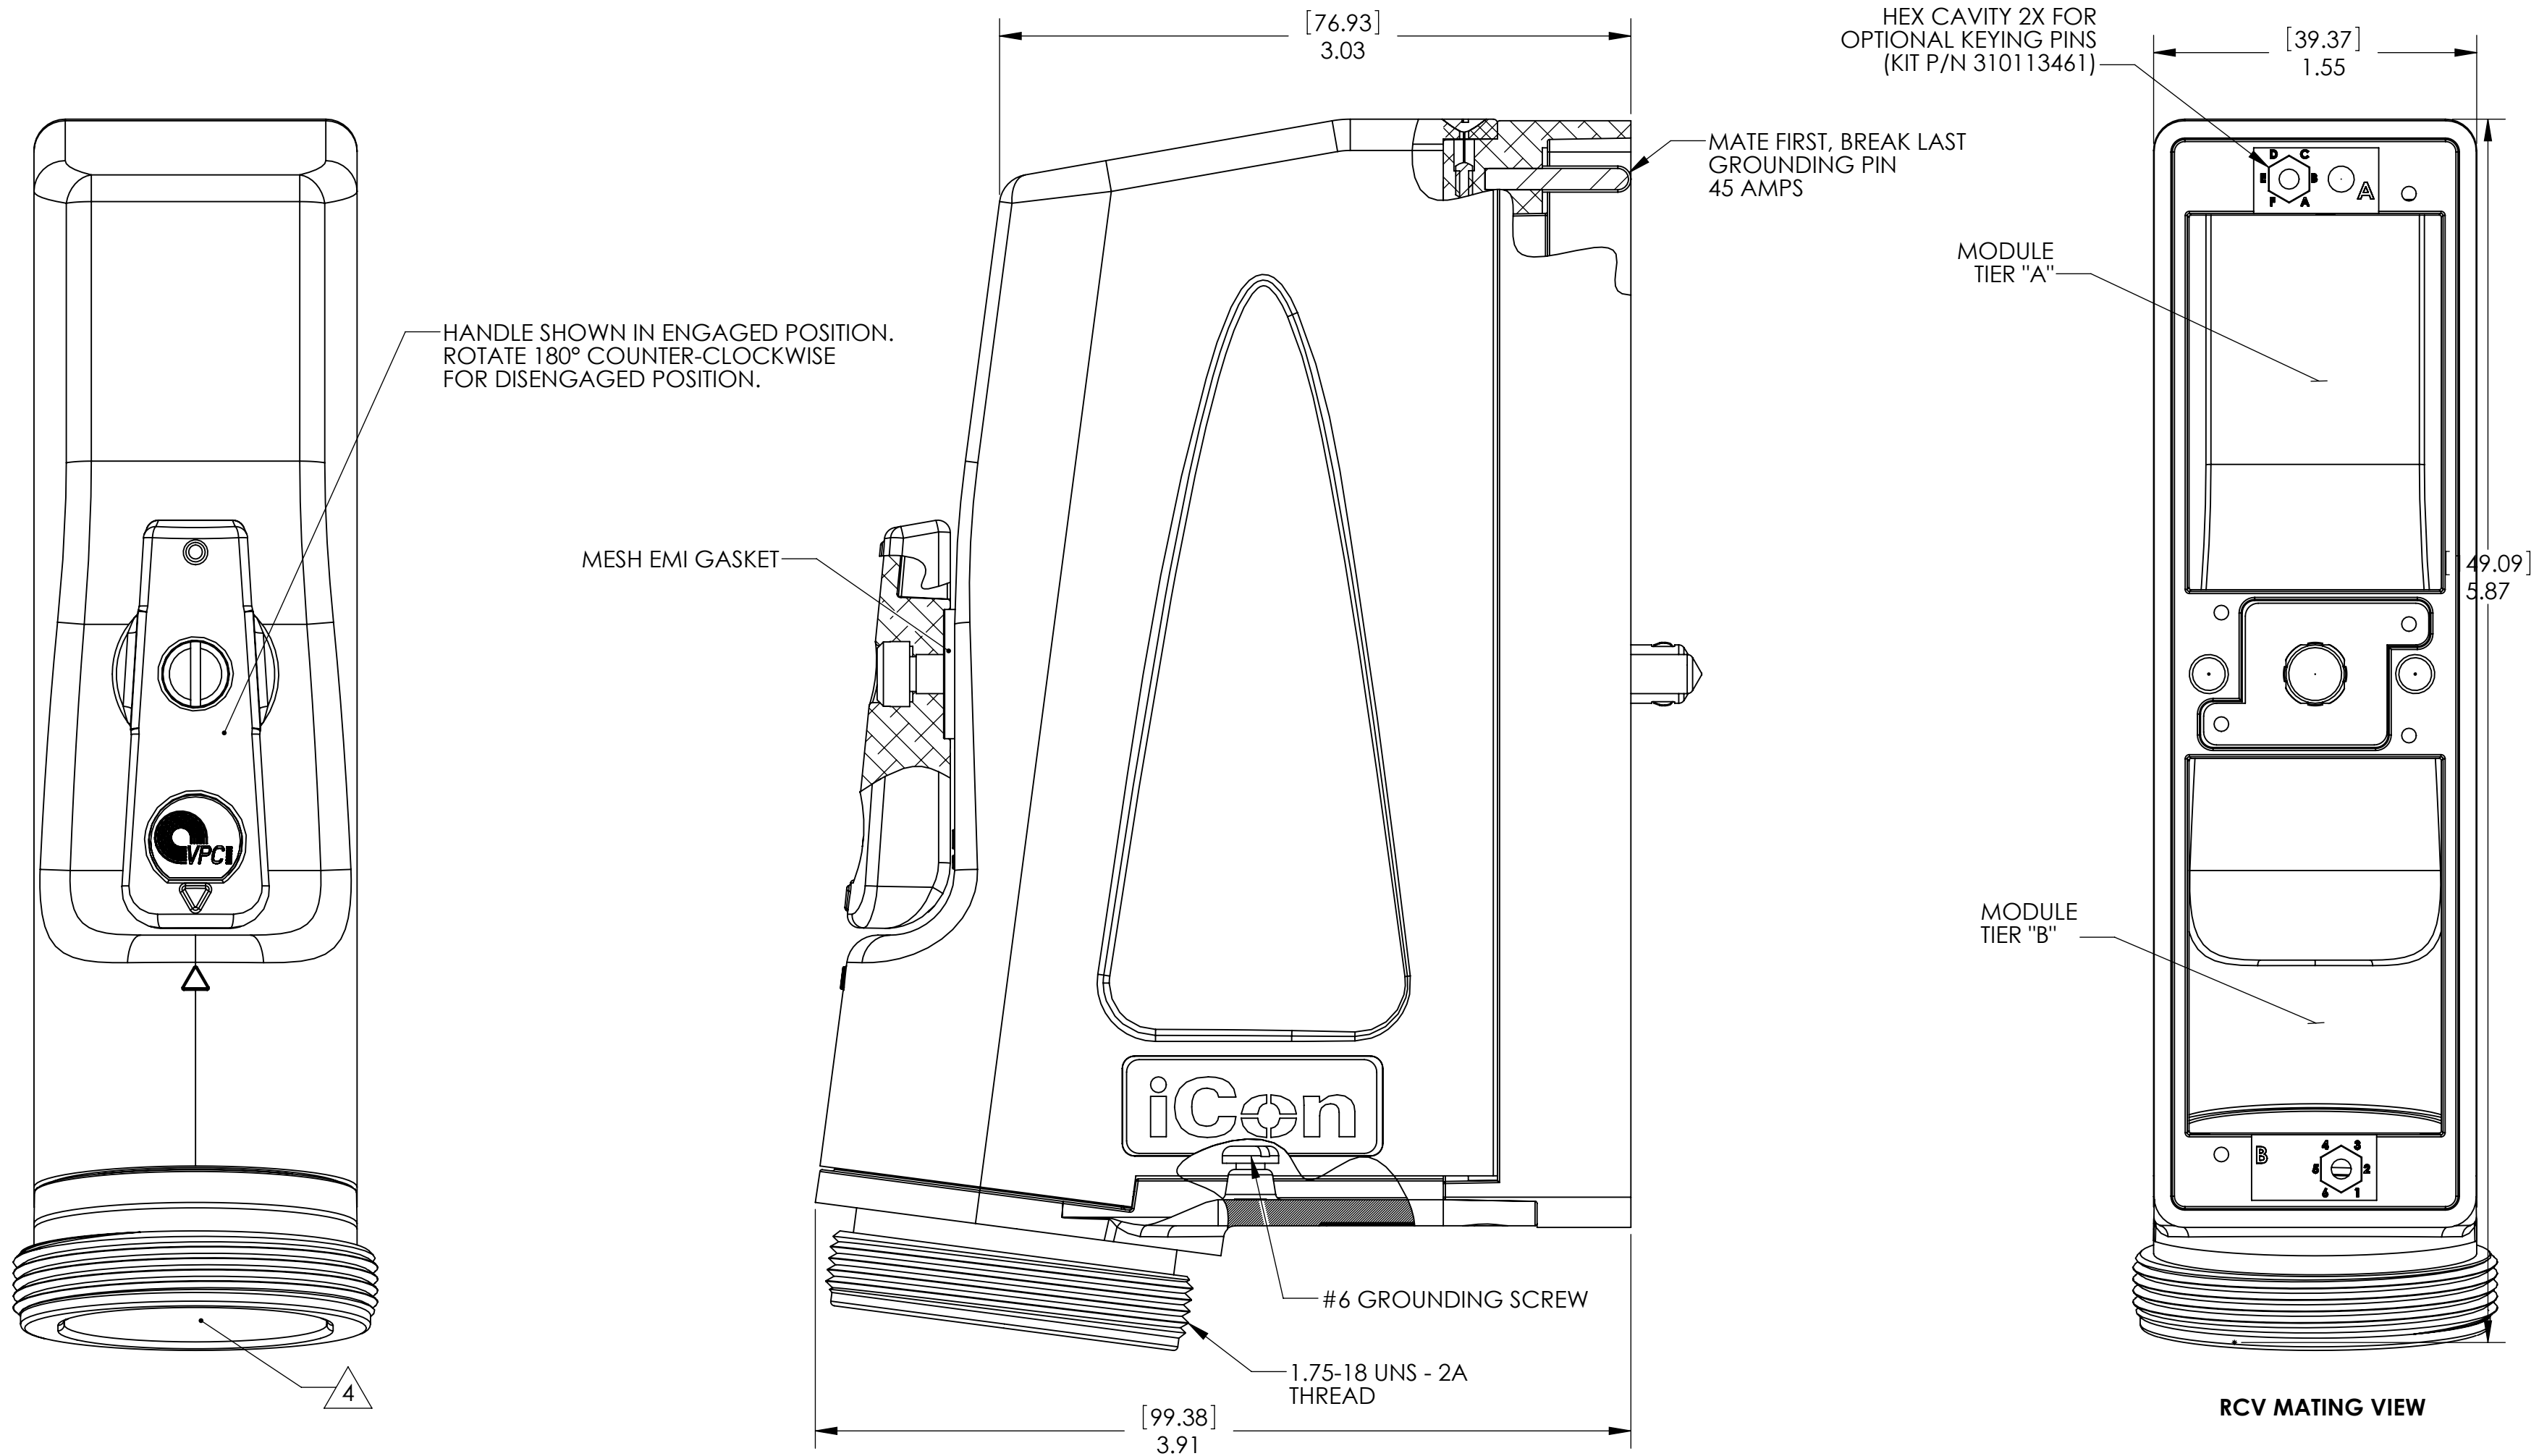

5. MAXIMUM CONTACT MATING FORCE SHOULD NOT EXCEED 100 LBS [444.8 N]

4. MAX CABLE BUNDLE EFFECTIVE DIAMETER = 1.37 IN.

3. PROTECTIVE COVER INCLUDED WITH ASSEMBLY (NOT SHOWN)

2. MATERIALS:

- FRAME: ALUMINUM ALLOY - Ni PLATED
- HARDWARE: STAINLESS STEEL ALLOY
- DRIVE UNIT: BRONZE ALLOY & STAINLESS STEEL ALLOY
- PLASTIC COMPONENTS & PROTECTIVE COVER: BLACK THERMOPLASTIC
- HANDLE: ALUMINUM ALLOY - POWDER COATED

1. FOR APPLICATION USE & CARE INFORMATION CONSULT VPC USERS GUIDE @WWW.VPC.COM

NOTES:

CUSTOMER DRAWING			
VIRGINIA PANEL CORPORATION WWW.VPC.COM			
ITA, ICON EMI			
DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG. NO.
[MILLIMETERS]	C	18117	410123102
INCHES			
SCALE: 1:1	410123102	1/23/08	SHEET 1 OF 1

4

3

2

1