

4

3

2


1

DO NOT SCALE DRAWING


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

## REVISIONS


| REV | DESCRIPTION | DATE      | ENGR     |
|-----|-------------|-----------|----------|
| B   | ECN #16046  | 8/20/2026 | M ECKERT |

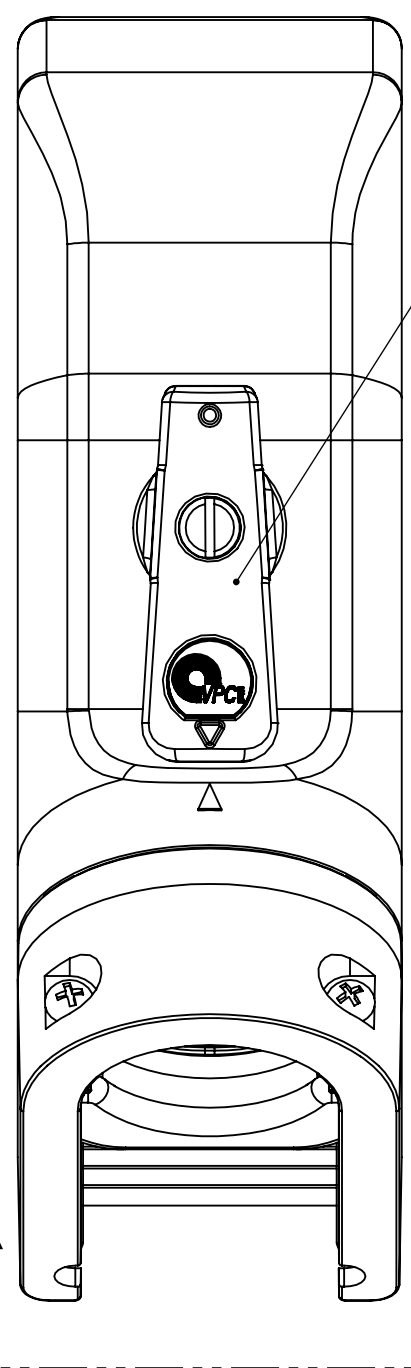


HANDLE SHOWN IN ENGAGED POSITION.  
ROTATE 180° COUNTER-CLOCKWISE  
FOR DISENGAGED POSITION.

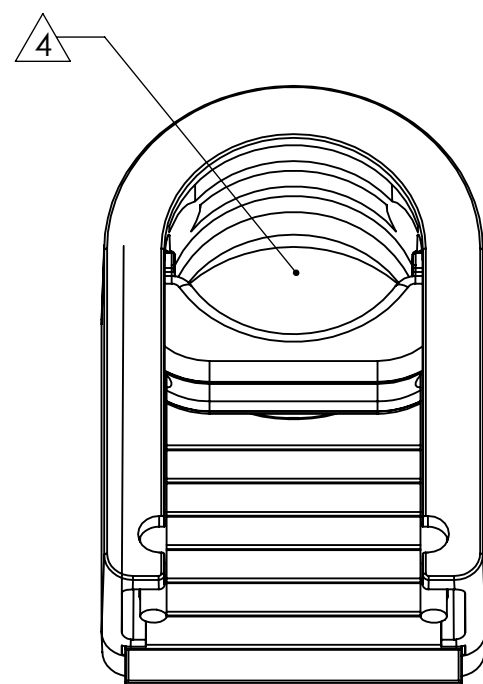


SECTION A-A

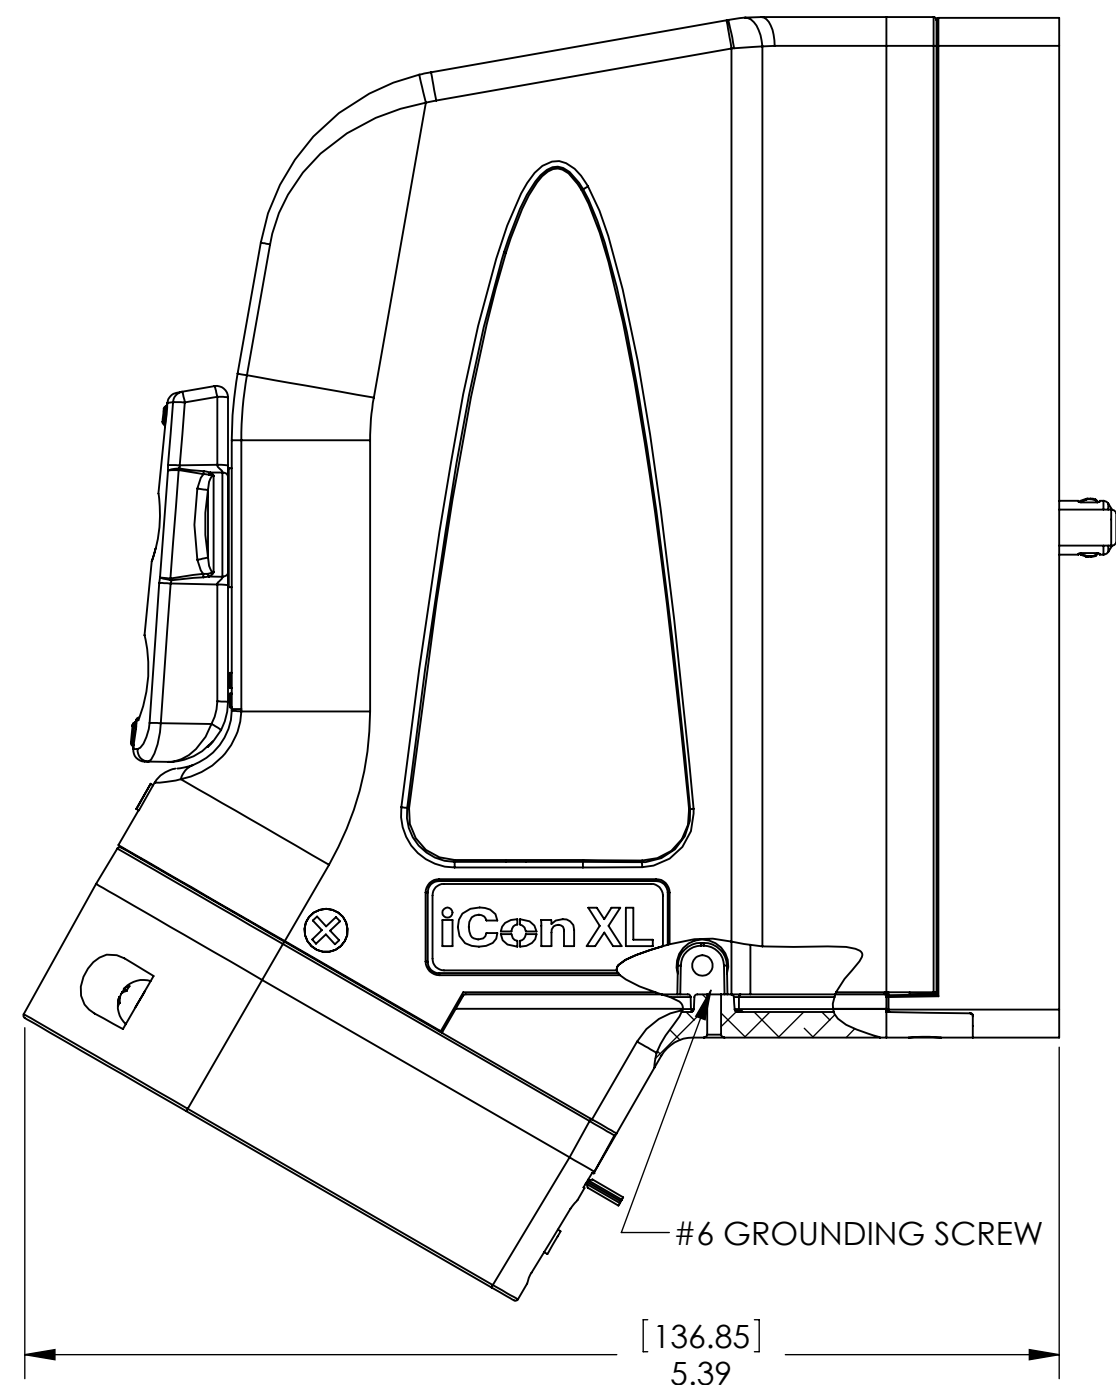

#6 GROUNDING SCREW

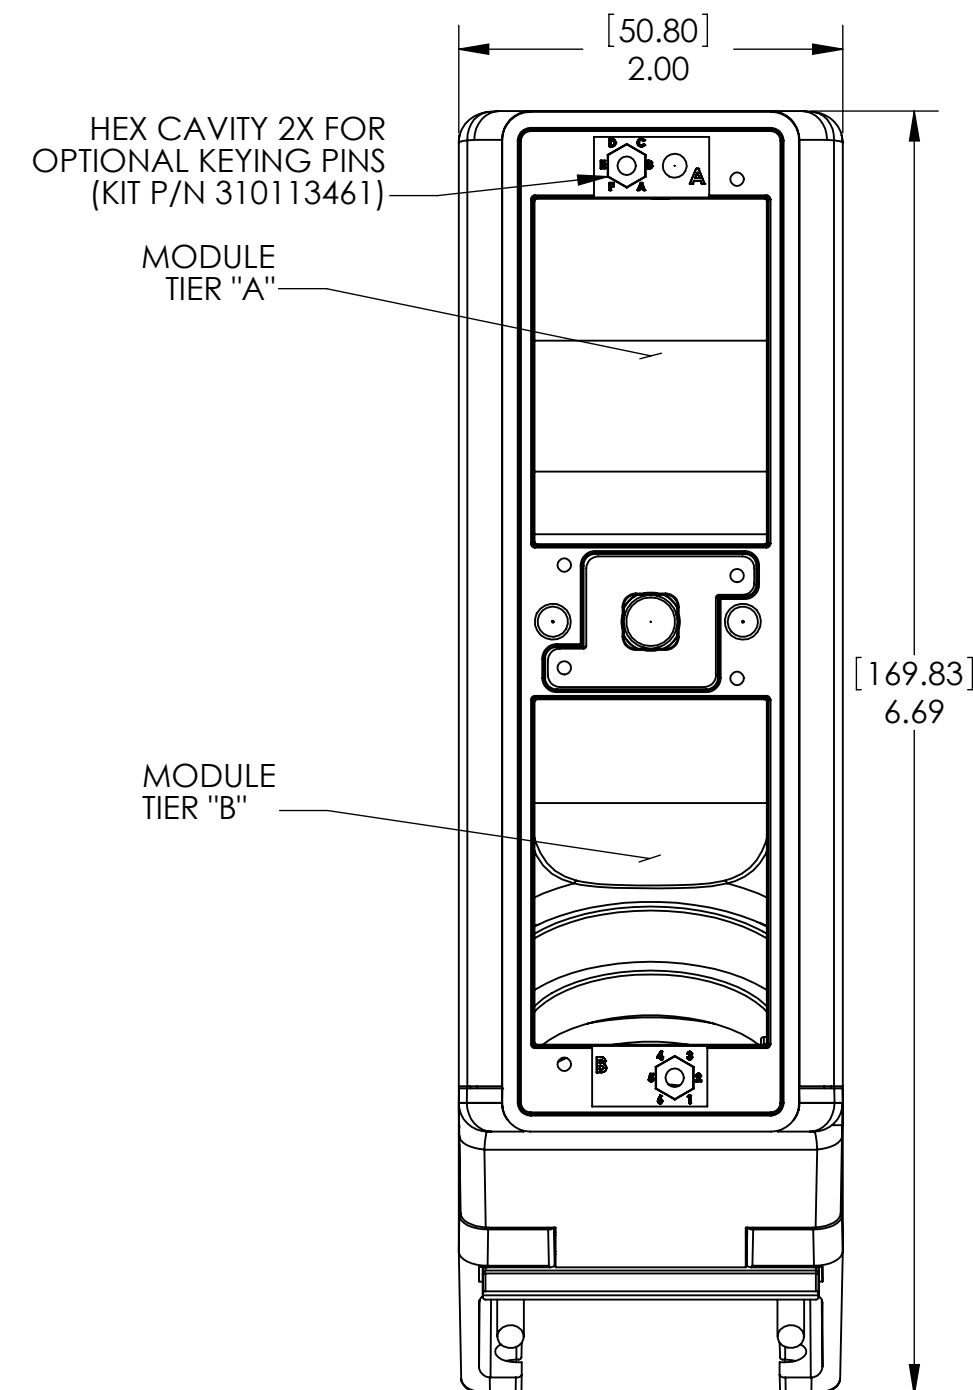[136.85]  
5.39

RCV MATING VIEW

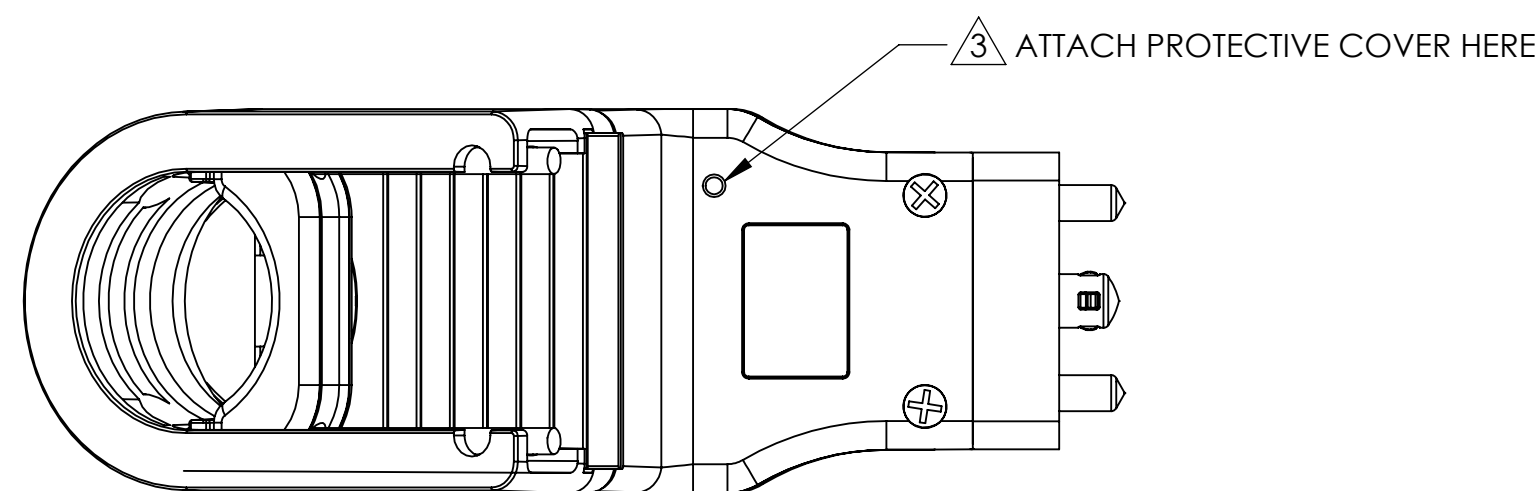

3 ATTACH PROTECTIVE COVER HERE

5. MAXIMUM CONTACT MATING FORCE SHOULD NOT EXCEED 100 LBS [444.8 N]

4 MAX CABLE BUNDLE EFFECTIVE DIAMETER = 1.95 IN.  
CLAMP CAN BE INVERTED FOR SMALLER CABLE BUNDLES

3 PROTECTIVE COVER INCLUDED WITH ASSEMBLY (NOT SHOWN)

2. MATERIALS:  
FRAME: ALUMINUM ALLOY - Ni PLATED  
HARDWARE: STAINLESS STEEL ALLOY  
DRIVE UNIT: BRONZE ALLOY & STAINLESS STEEL ALLOY  
PLASTIC COMPONENTS & PROTECTIVE COVER: BLACK THERMOPLASTIC  
CABLE CLAMP: ALUMINUM ALLOY, POWDER COATED

1. FOR APPLICATION USE & CARE INFORMATION CONSULT VPC USERS GUIDE @WWW.VPC.COM  
NOTES:

## CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION

WWW.VPC.COM

ITA, ICON XL

RELATIVE CONNECTOR POSITIONS  
AND WIRE ROUTING ARE GENERIC  
AND MAY VARY WITH PINOUT

DIMENSIONS ARE SHOWN AS:

[MILLIMETERS]  
INCHES

| SIZE       | CAGE CODE | DWG. NO.  | REV          |
|------------|-----------|-----------|--------------|
| C          | 18117     | 410123232 | B            |
| SCALE: 1:1 | 410123232 | 5/6/2020  | SHEET 1 OF 1 |