

4

3


2

1





DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
F	ECN #13547	7/17/2023	R GARMAN

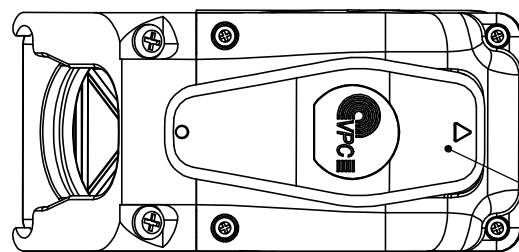


HANDLE SHOWN IN ENGAGED POSITION. ROTATE 180° COUNTER-CLOCKWISE FOR DISENGAGED POSITION.

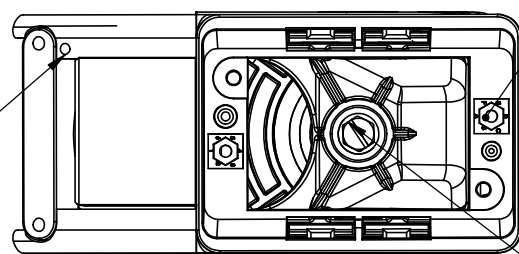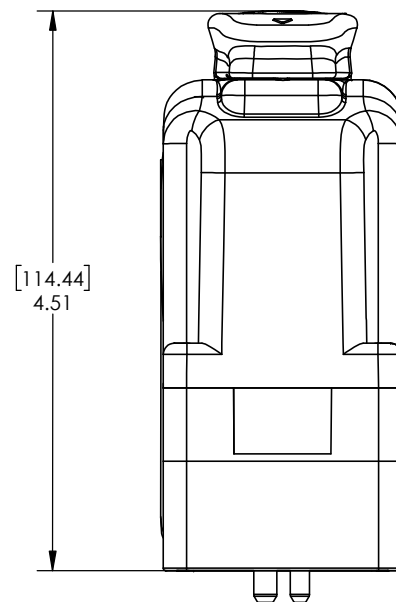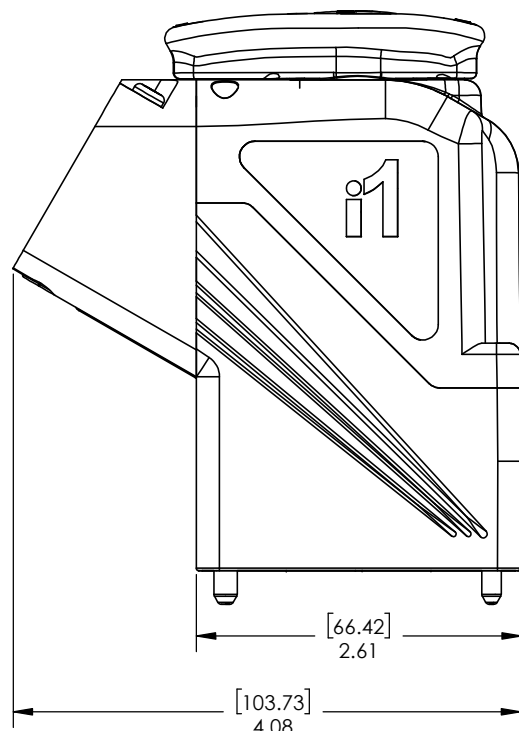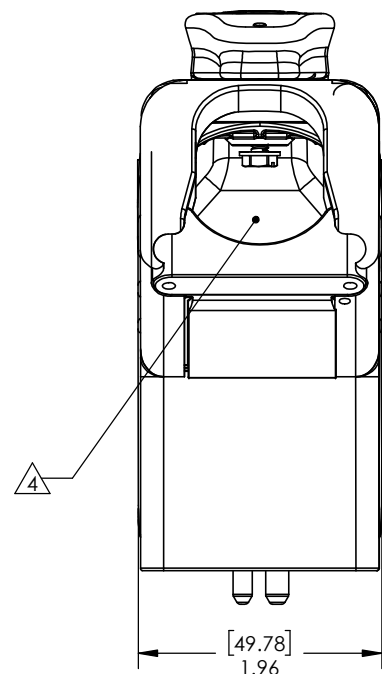

CAVITY FOR KEYING KIT, TYP. 2 PLCS. ACCESSORY P/N 310113461 (2 KEYS PER KIT) NOT INCLUDED WITH ITA

#6 GROUNDING SCREW

RECOMMENDED LOCATIONS FOR ATTACHING PROTECTIVE COVER

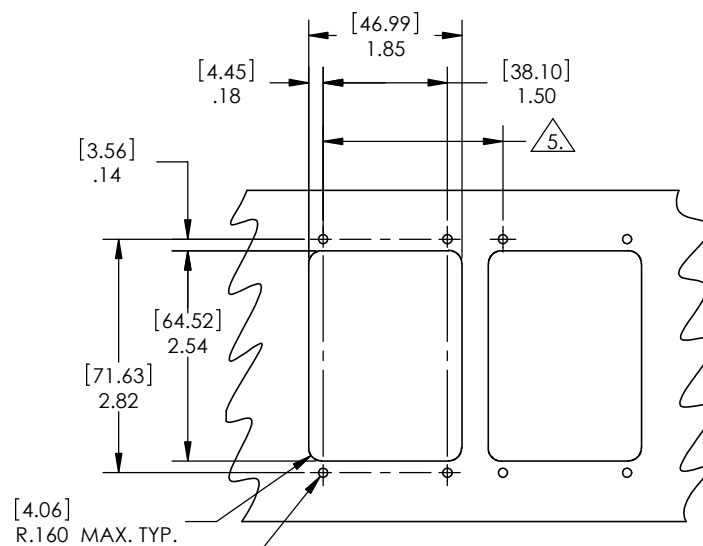

FOR MOUNTING USE  $\phi$  [2.79] .11, 2-56 OR M2 TAPPED HOLE. (SUPPLIED WITH 4X 2-56 SCREWS, LOCK WASHERS AND NUTS)

RECOMMENDED RECEIVER PANEL CUTOUT  
TOLERANCES ARE:  
.XX =  $\pm$ [.25].01  
.XXX =  $\pm$ [.13].005  
UNLESS OTHERWISE SPECIFIED

5 STANDARD MINIMUM RECEIVER SPACING BETWEEN PANEL CUTOUTS IS 2.20" [55.88mm]. FOR A COMPLETE LIST OF SPACING DIMENSIONS, SEE IT RECEIVER MOUNTING SECTION IN THE IT USER'S MANUAL.

4 MAX CABLE BUNDLE EFFECTIVE DIAMETER = 1.26 IN CLAMP CAN BE INVERTED FOR SMALLER CABLE BUNDLES

3. PROTECTIVE COVER INCLUDED WITH ASSEMBLY (NOT SHOWN)

2. MATERIALS:

- OUTER SHELL COMPONENTS & HANDLE - THERMOPLASTIC
- INNER SHELL - ALUMINUM ALLOY
- SPRING LOCK BEAMS - NI PLATED COPPER ALLOY
- DECALS - VINYL OVER POLYESTER
- HARDWARE & PINS - STAINLESS STEEL

1. FOR MORE INFORMATION, VISIT VPC.COM.

NOTES:

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION  
WWW.VPC.COM

i1 ITA XL

DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG.NO.	REV
[MILLIMETERS]	C	18117	410128106	F
INCHES	SCALE: NONE	410128106	8/4/09	SHEET 1 OF 1

4

3

2

1