

4

3


2

1





DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
G	ECN #14860	3/5/25	R HERRON

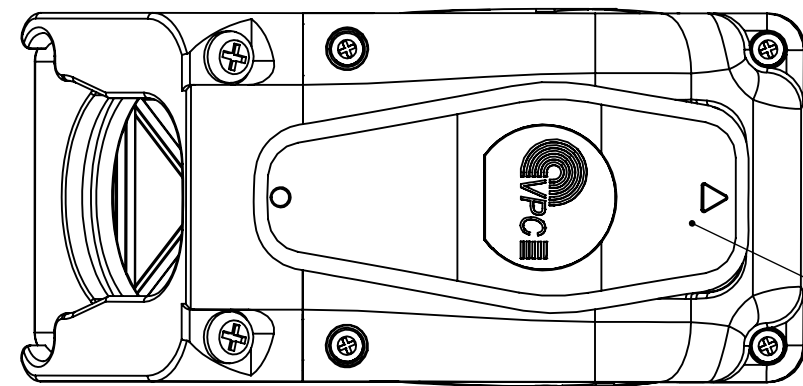

HANDLE SHOWN IN ENGAGED POSITION. ROTATE 180° COUNTER-CLOCKWISE FOR DISENGAGED POSITION.

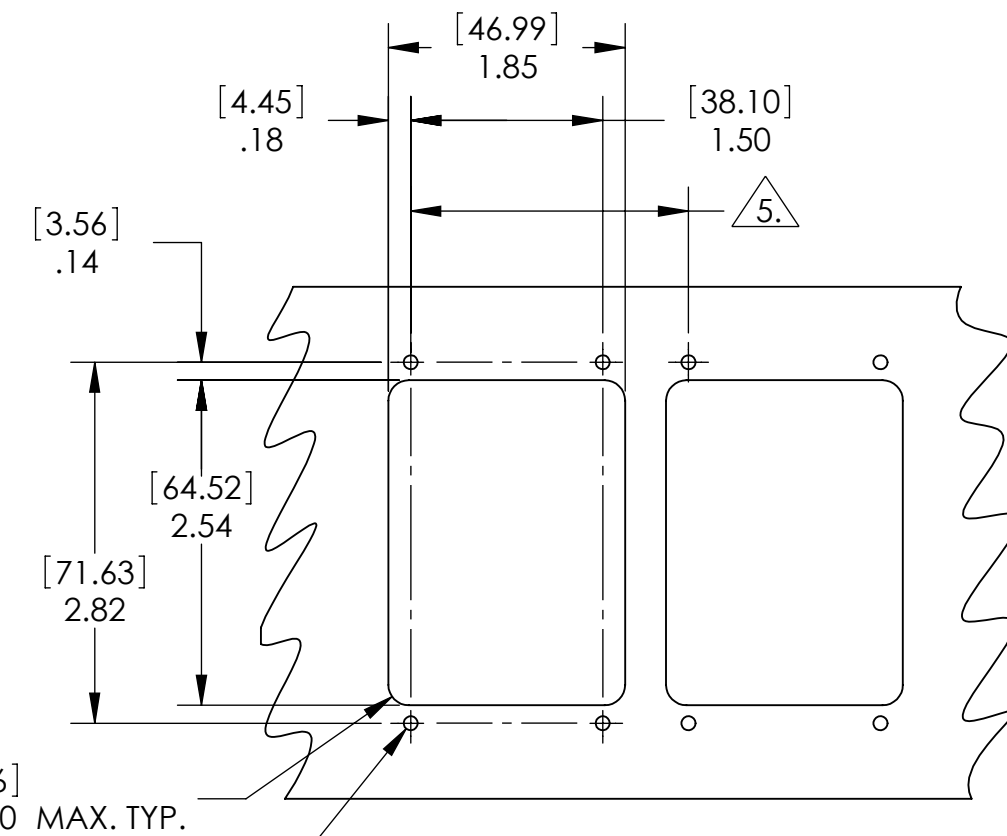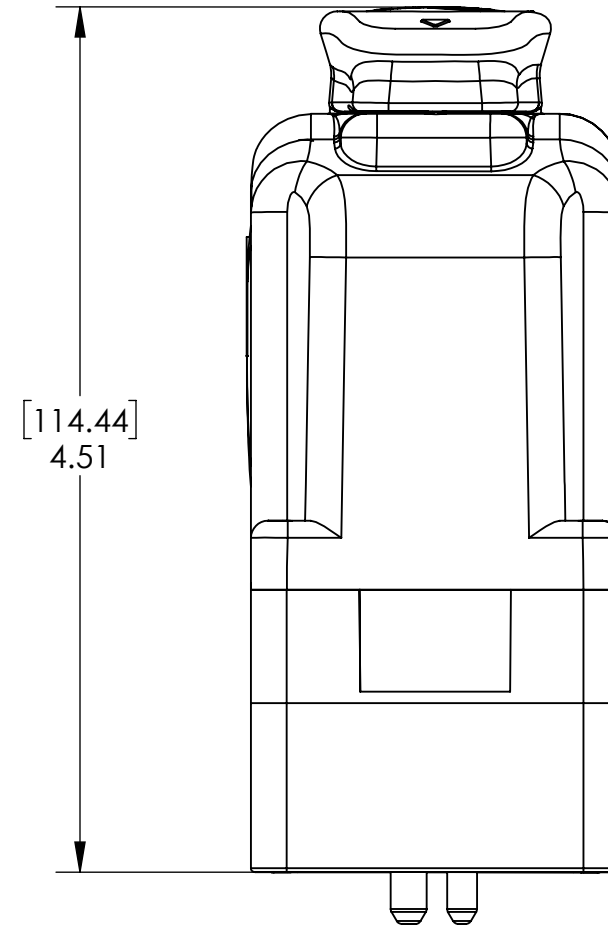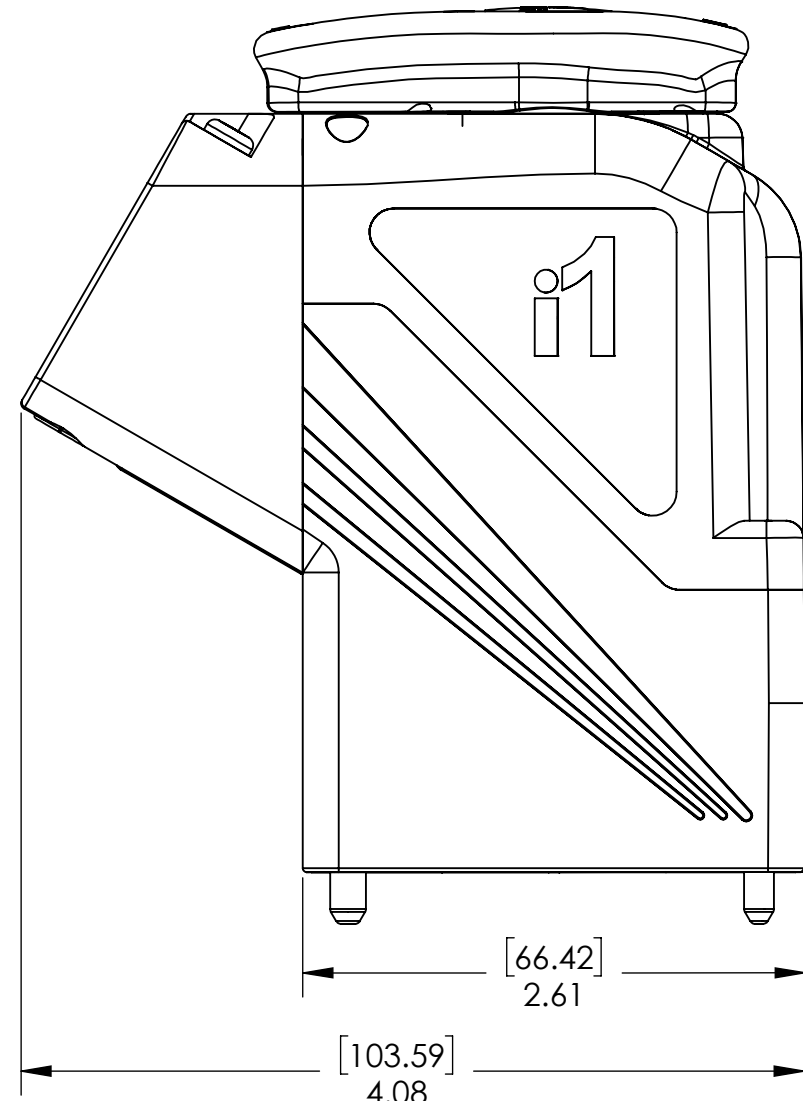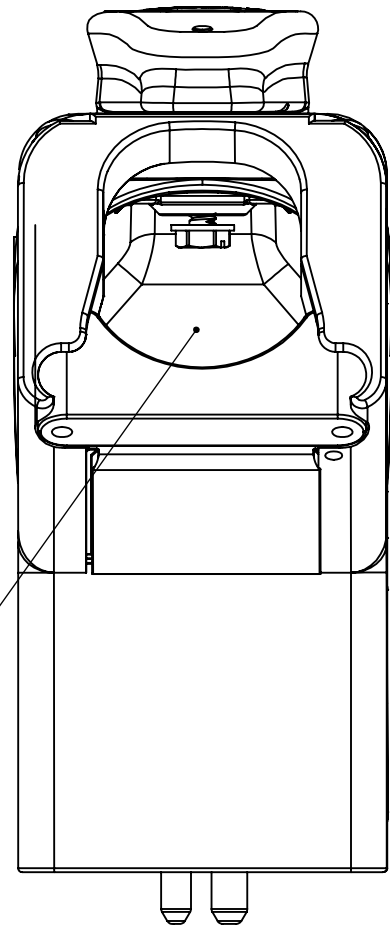

**RECOMMENDED RECEIVER PANEL CUTOUT**  
TOLERANCES ARE:  
.XX = ±[.25].01  
.XXX = ±[.13].005  
UNLESS OTHERWISE SPECIFIED

FOR MOUNTING USE Ø [2.79] .11, 2-56 OR M2 TAPPED HOLE. (SUPPLIED WITH 4X 2-56 SCREWS, LOCK WASHERS AND NUTS)

CAVITY FOR KEYING KIT, TYP. 2 PLCS. ACCESSORY P/N 310113461 (2 KEYS PER KIT) NOT INCLUDED WITH ITA

#6 GROUNDING SCREW

RECOMMENDED LOCATIONS FOR ATTACHING PROTECTIVE COVER

5 STANDARD MINIMUM RECEIVER SPACING BETWEEN PANEL CUTOUTS IS 2.20" [55.88mm]. FOR A COMPLETE LIST OF SPACING DIMENSIONS, SEE IT RECEIVER MOUNTING SECTION IN THE IT USER'S MANUAL.

4 MAX CABLE BUNDLE EFFECTIVE DIAMETER = 1.26 IN CLAMP CAN BE INVERTED FOR SMALLER CABLE BUNDLES

3. PROTECTIVE COVER INCLUDED WITH ASSEMBLY (NOT SHOWN)

2. MATERIALS:  
OUTER SHELL COMPONENTS & HANDLE - THERMOPLASTIC  
INNER SHELL - ALUMINUM ALLOY  
SPRING LOCK BEAMS - NI PLATED COPPER ALLOY  
DECALS - VINYL OVER POLYESTER  
HARDWARE & PINS - STAINLESS STEEL

1. FOR MORE INFORMATION, VISIT VPC.COM.

NOTES:

<b>CUSTOMER DRAWING</b>			
<b>VIRGINIA PANEL CORPORATION</b> WWW.VPC.COM			
<b>i1 ITA XL</b>			
DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG. NO.
[MILLIMETERS]	C	18117	410128106
INCHES	SCALE: NONE	410128106	8/4/09 SHEET 1 OF 1

4

3

2

1