

4

3

2

1




DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
L	ECN# 15010	5/23/25	RF

D
C
B
A

D
C
B
A

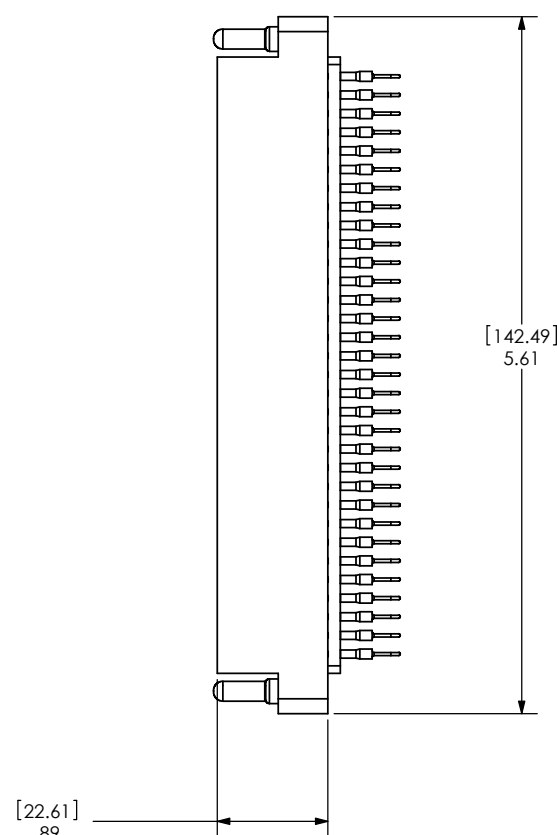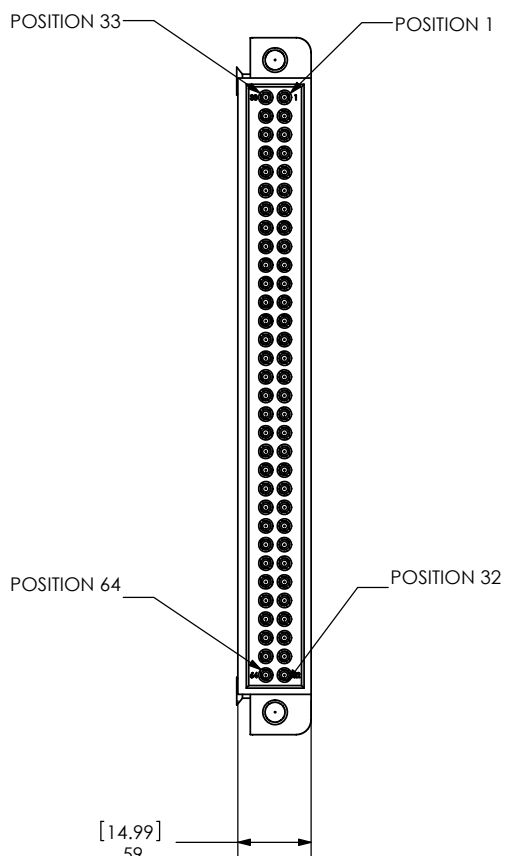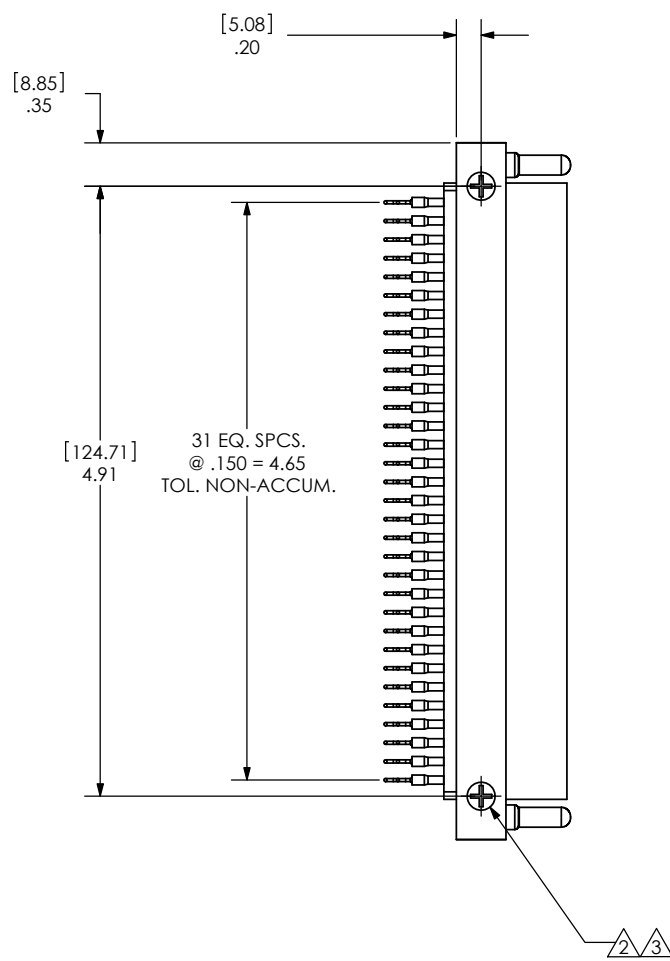

4. WHEN LOADING PCBs SIDE-BY-SIDE SOLDER TAILS COULD INTERFERE WITH ADJACENT PCBs.
- 3 PCB MOUNTING HARDWARE INCLUDED (4-40 FLAT HEAD PHILLIPS).
- 2 MAXIMUM TORQUE WHEN INSTALLING A PRINTED CIRCUIT BOARD IS 2 IN-LBS. [0.225 N-m].
1. FOR MORE INFORMATION, VISIT VPC.COM.

NOTES

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION
WWW.VPC.COM

SIGNAL MODULE, ITA, TRIPADDLE
64 POSITION WITH RIGHT ANGLE CONTACTS
FOR CUSTOM PCB MOUNTING

DIMENSIONS ARE SHOWN AS: [MILLIMETERS]	SIZE C	CAGE CODE 18117	DWG.NO. 510108112	REV L
---	-----------	--------------------	----------------------	----------