




DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
N	ECN # 15010	5/23/25	RF

D  
C  
B  
A

D  
C  
B  
A

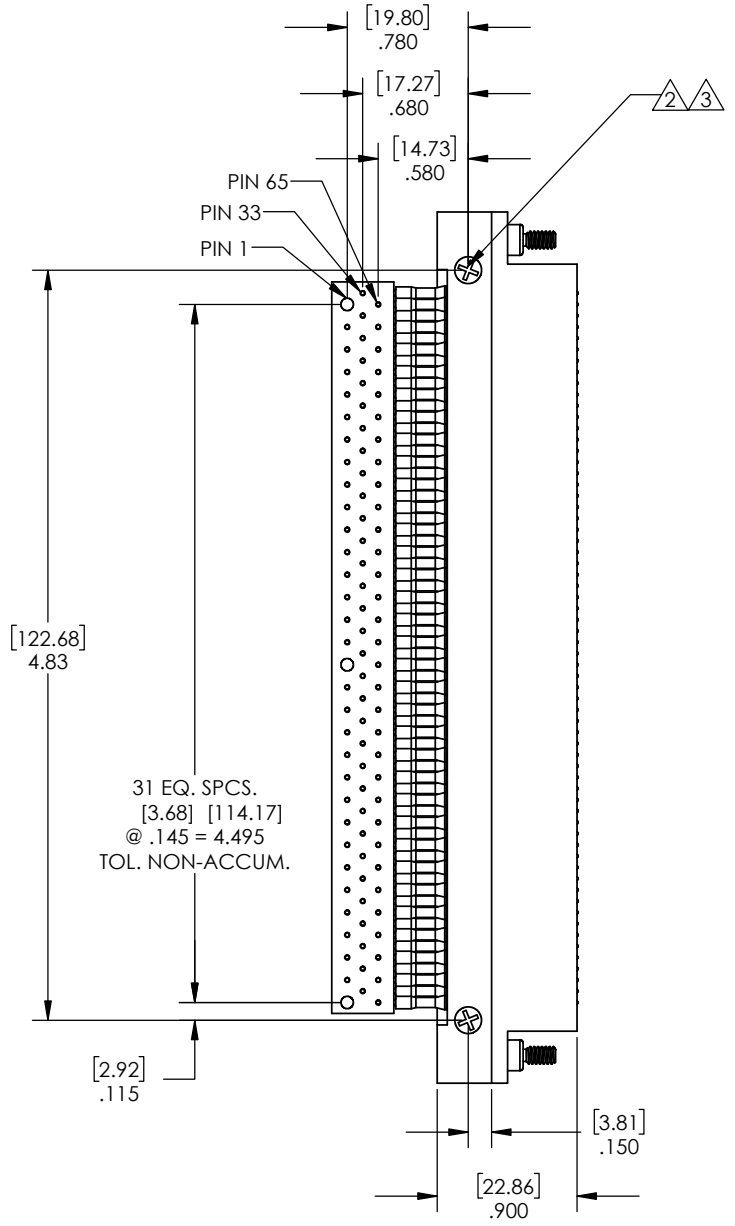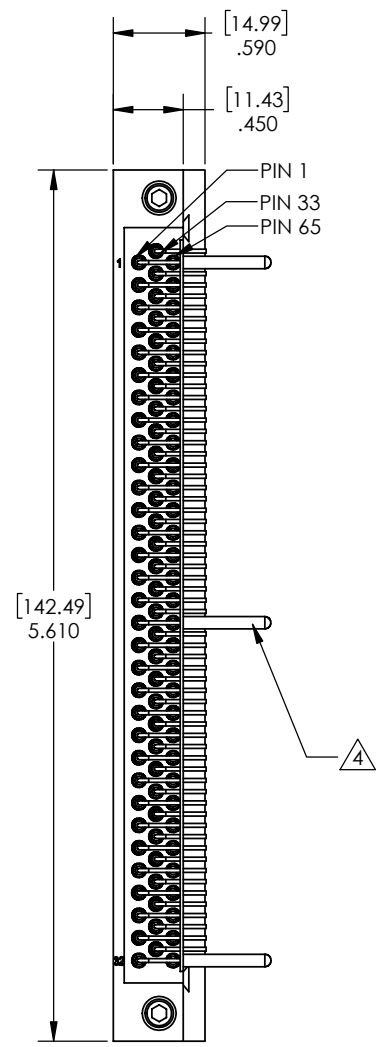

5. WHEN LOADING PCBs SIDE-BY-SIDE SOLDER TAILS COULD INTERFERE WITH ADJACENT PCBs.
- 4 PLASTIC CAPS USED ONLY FOR SHIPPING. REMOVE PRIOR TO SOLDER TERMINATION.
- 3 PCB MOUNTING HARDWARE INCLUDED (2-56 FLAT HEAD PHILLIPS).
- 2 MAXIMUM TORQUE WHEN INSTALLING A PRINTED CIRCUIT BOARD IS 1.5 IN-LBS. [1.69N-m].

1. FOR MORE INFORMATION, VISIT VPC.COM.

NOTES:

**CUSTOMER DRAWING**

**VIRGINIA PANEL CORPORATION**  
WWW.VPC.COM

SIGNAL MOD, ITA, TP,  
96 POS / RT ANG CNT FOR PCB

DIMENSIONS ARE SHOWN AS:  
[MILLIMETERS]  
INCHES

SIZE	CAGE CODE	DWG. NO.	REV
C	18117	510108125	N
SCALE: NONE	510108125	7/8/97	SHEET 1 OF 1

4

3

2

1