

DO NOT SCALE DRAWING


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.


REVISIONS

REV	DESCRIPTION	DATE	ENGR
M	ECN #15139	3/30/26	C. AMAYA

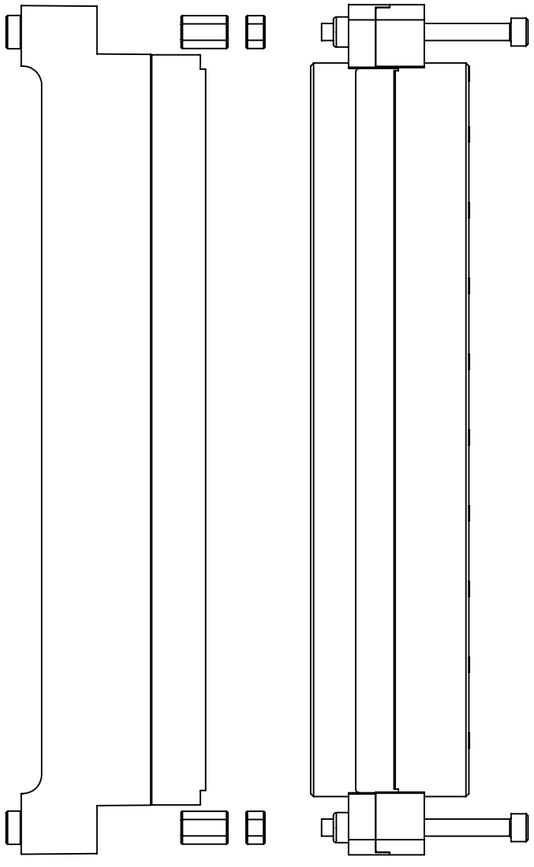

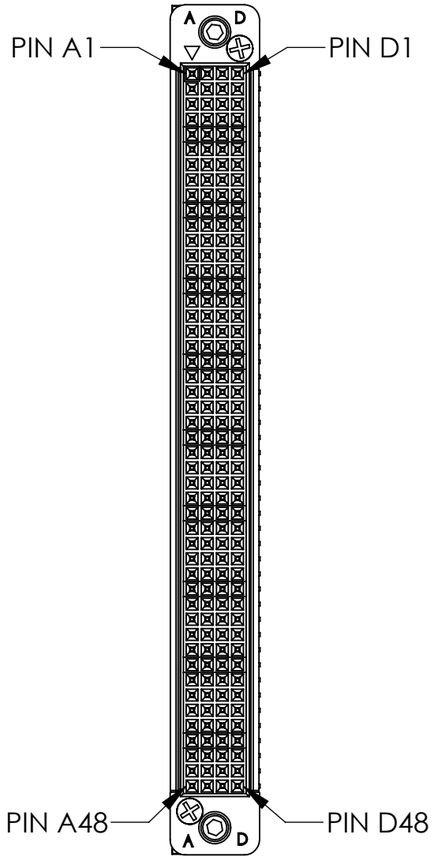

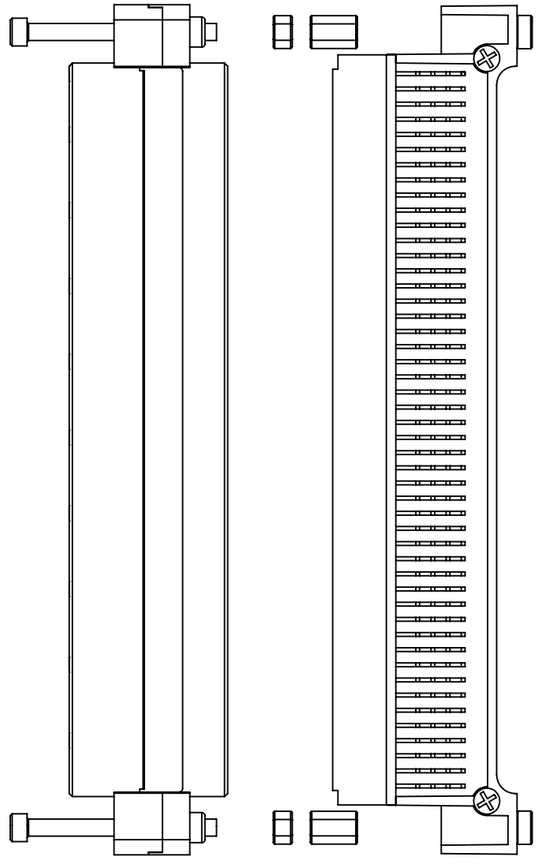



NOTES:

1 FOR MORE INFORMATION, VISIT VPC.COM.

2 MATERIALS:
HARDWARE: STAINLESS STEEL SCREWS
BRASS ALLOY STANDOFFS Ni PLATED
SHROUD: PEI
HEADER - INSULATOR: GLASS FILLED PET BLACK THERMOPLASTIC
CONTACT: PHOSPHOR BRONZE ALLOY
CONTACT PLATING IN MATING AREA: .00003 in. Au OVER .00005 in. Ni

3 CUSTOMER PCB MUST BE MANUFACTURED WITH (HEADER) INSTALLATION AREA COMPLYING TO RECOMMENDED PCB LAYOUT AS SHOWN ON PAGE 2

4 ALL NECESSARY HARDWARE FOR ASSEMBLY SUPPLIED IN KIT


5. WHEN LOADING PCBS SIDE-BY-SIDE SOLDER TAILS COULD INTERFERE WITH ADJACENT PCBS.

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION
WWW.VPC.COM

SIG, MOD, RCVR, QUADPADDLE, 192 POS, RT ANG, CNTS FOR CUSTOM PCB MOUNTING

DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG.NO.	REV
[MILLIMETERS] INCHES	B	18117	**510150152**	M
	SCALE: NONE	510150152	6/2/06	SHEET 1 OF 2

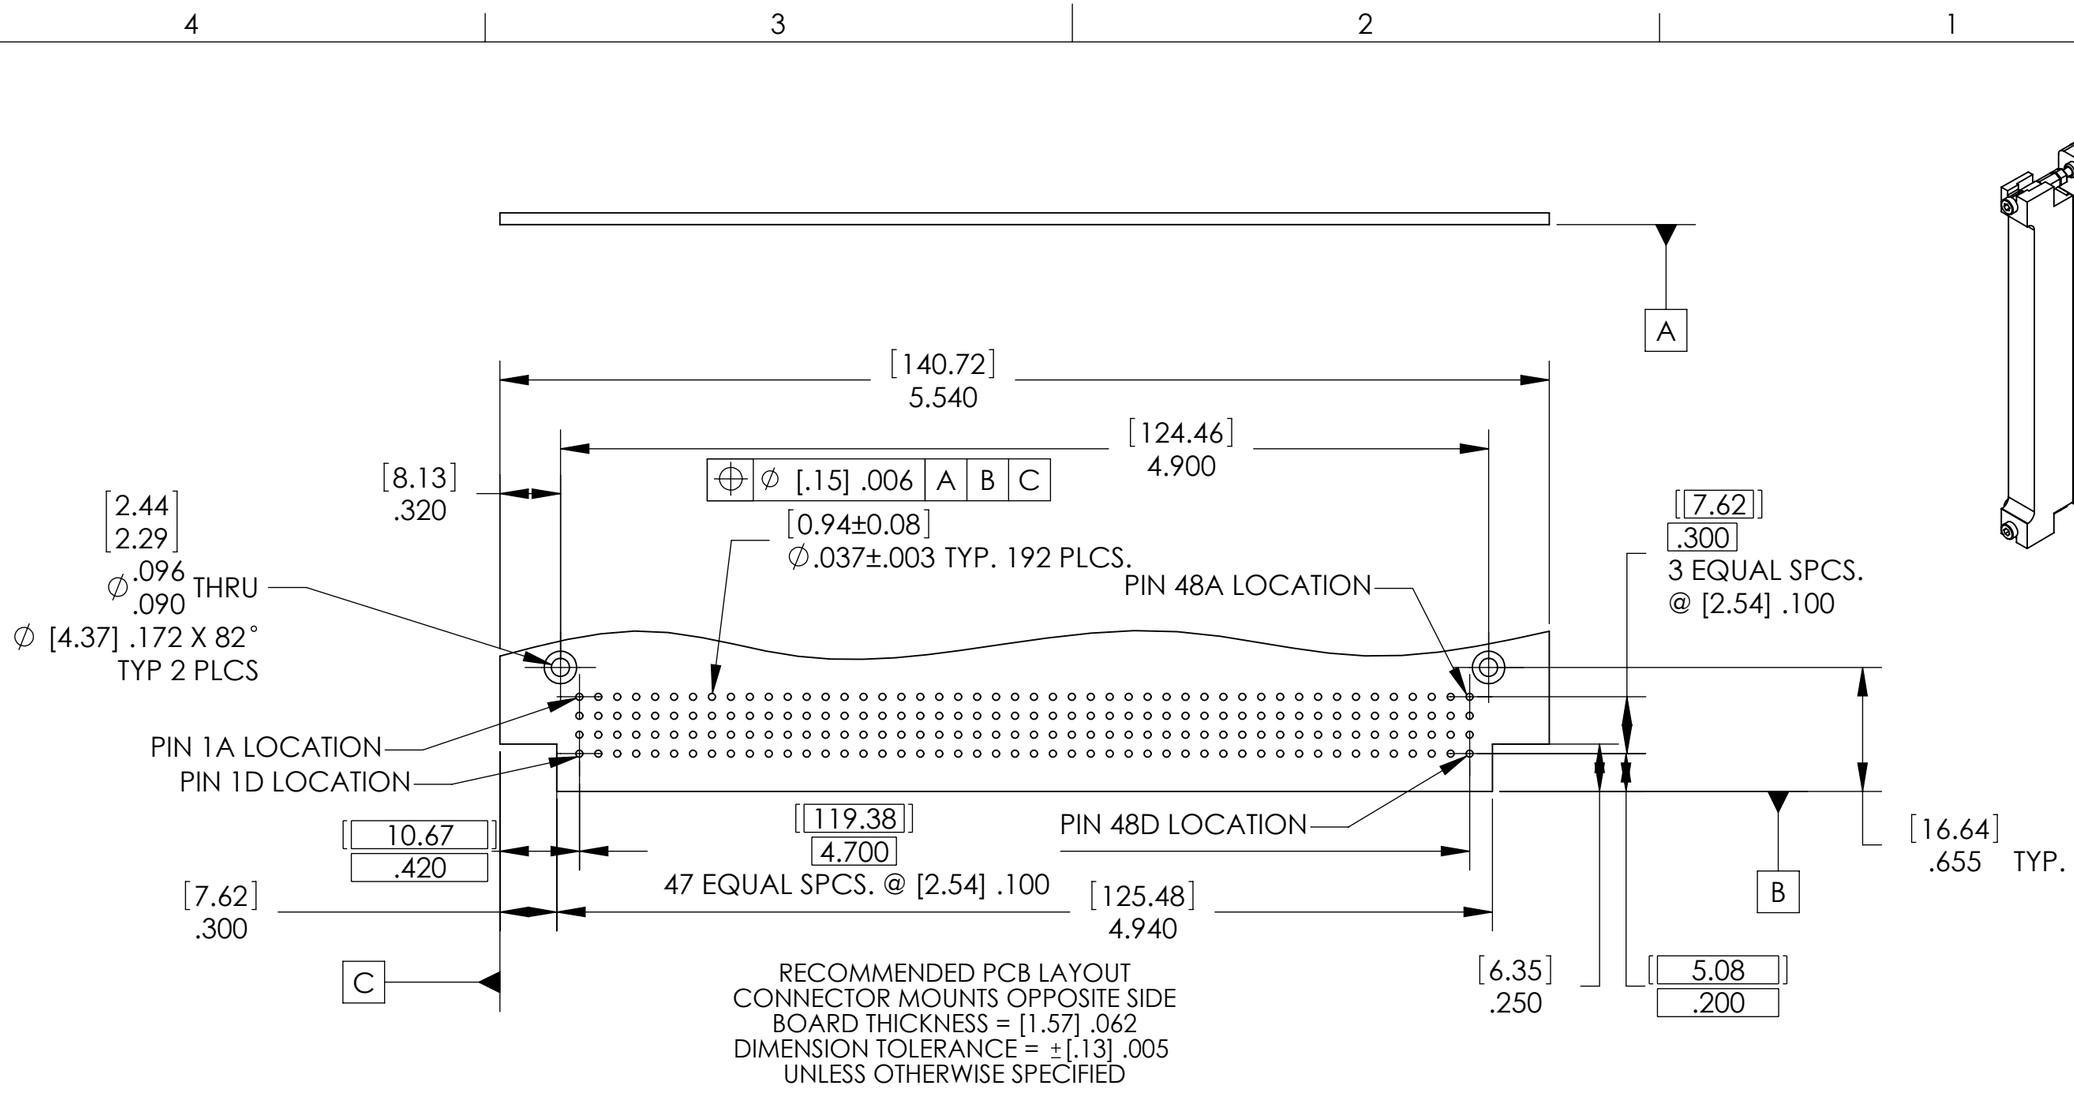

RECOMMENDED PCB LAYOUT
CONNECTOR MOUNTS OPPOSITE SIDE
BOARD THICKNESS = [1.57] .062
DIMENSION TOLERANCE = ±[.13] .005
UNLESS OTHERWISE SPECIFIED

CUSTOMER DRAWING - CUSTOMER DRAWING - CUSTOMER DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

SIZE	CAGE CODE	DWG.NO.	REV
B	18117	**510150152**	M

SCALE: NONE | 510150152 10/31/19 | SHEET 2 OF 2

DO NOT SCALE DRAWING