

4

3




2

1

DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

REV	DESCRIPTION	DATE	ENGINEER
C	ECN #15032	06/04/2025	C. Amaya

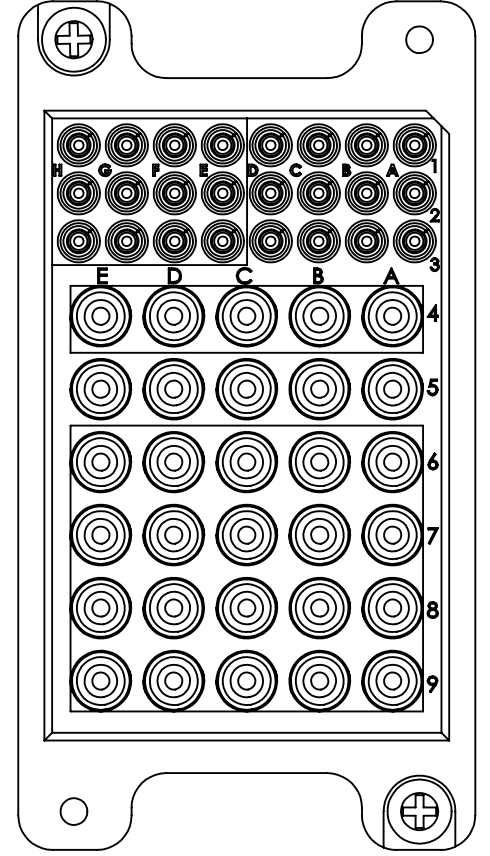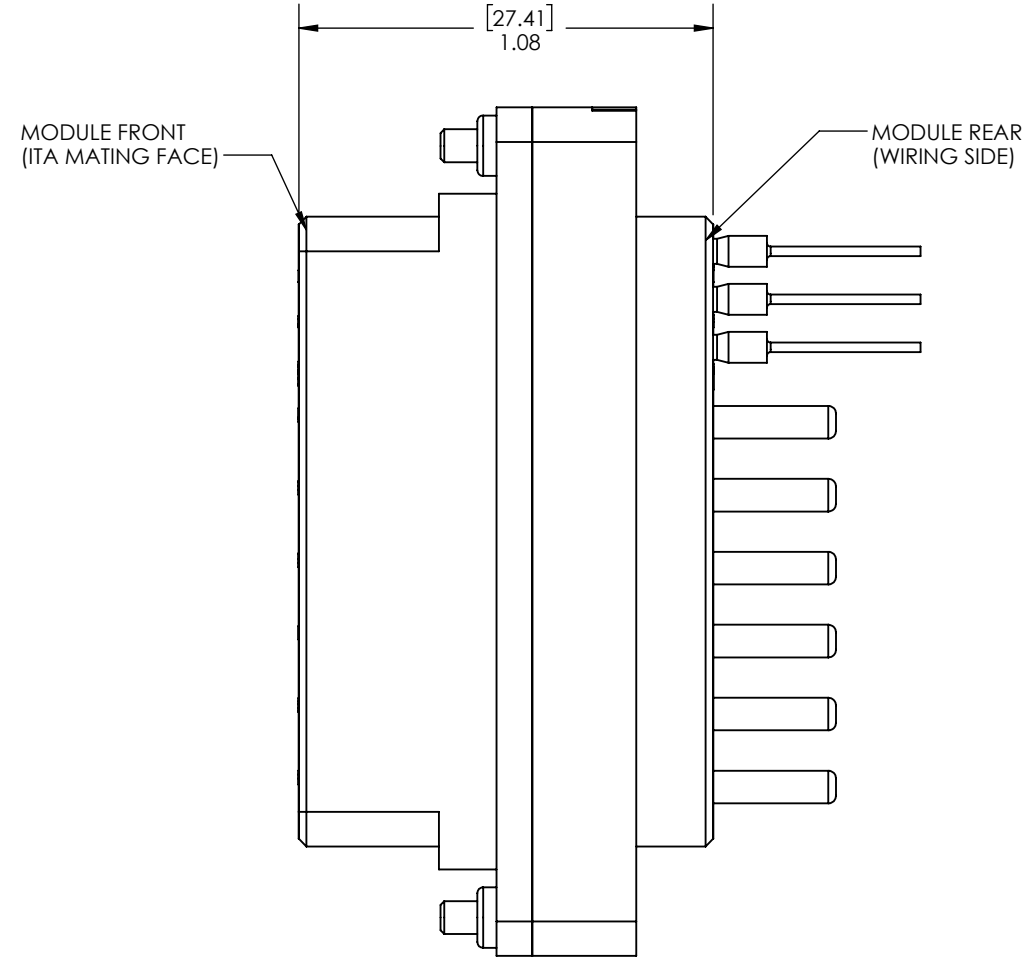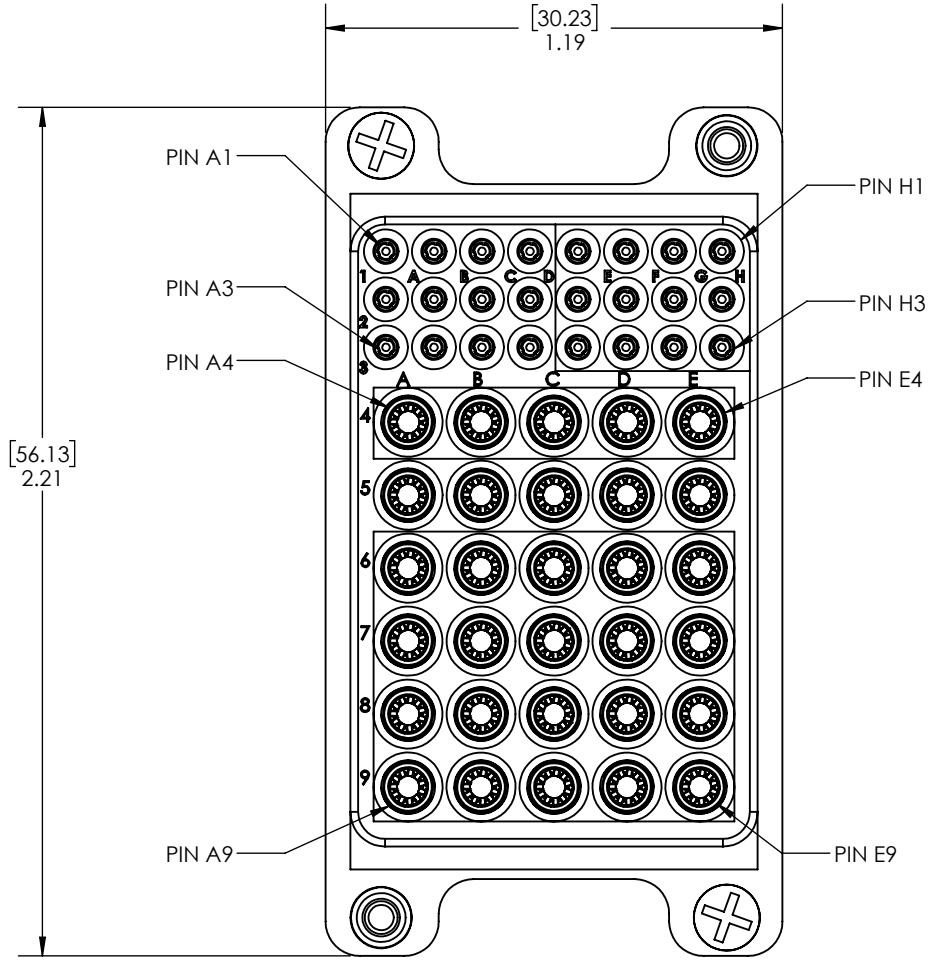

- 4 SEE SHEET 2 FOR NOTE.
3. MATING MODULE: 510161111
2. MATERIALS:
 HOUSING: FR4 - PAINTED BLACK
 MOUNTING HARDWARE: STAINLESS STEEL
 CONTACT: BERYLLIUM COPPER
 CONTACT PLATING: 30 μ in. Au OVER 100 μ in. Ni
1. FOR MORE INFORMATION, VISIT VPC.COM.
- NOTES:

CUSTOMER DRAWING

TriPaddle Signal/Micro Power and Micro Coax, Mod, Rcvr, iCon, 24/30 Pos, Fully Loaded

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT

DWG. NO.	REV	
510160128	C	
SCALE	CAGE CODE	SHEET
NONE	18117	1 OF 2

4

3

2

1

4

3

2

1

D

D

C


C

B

B

A

A

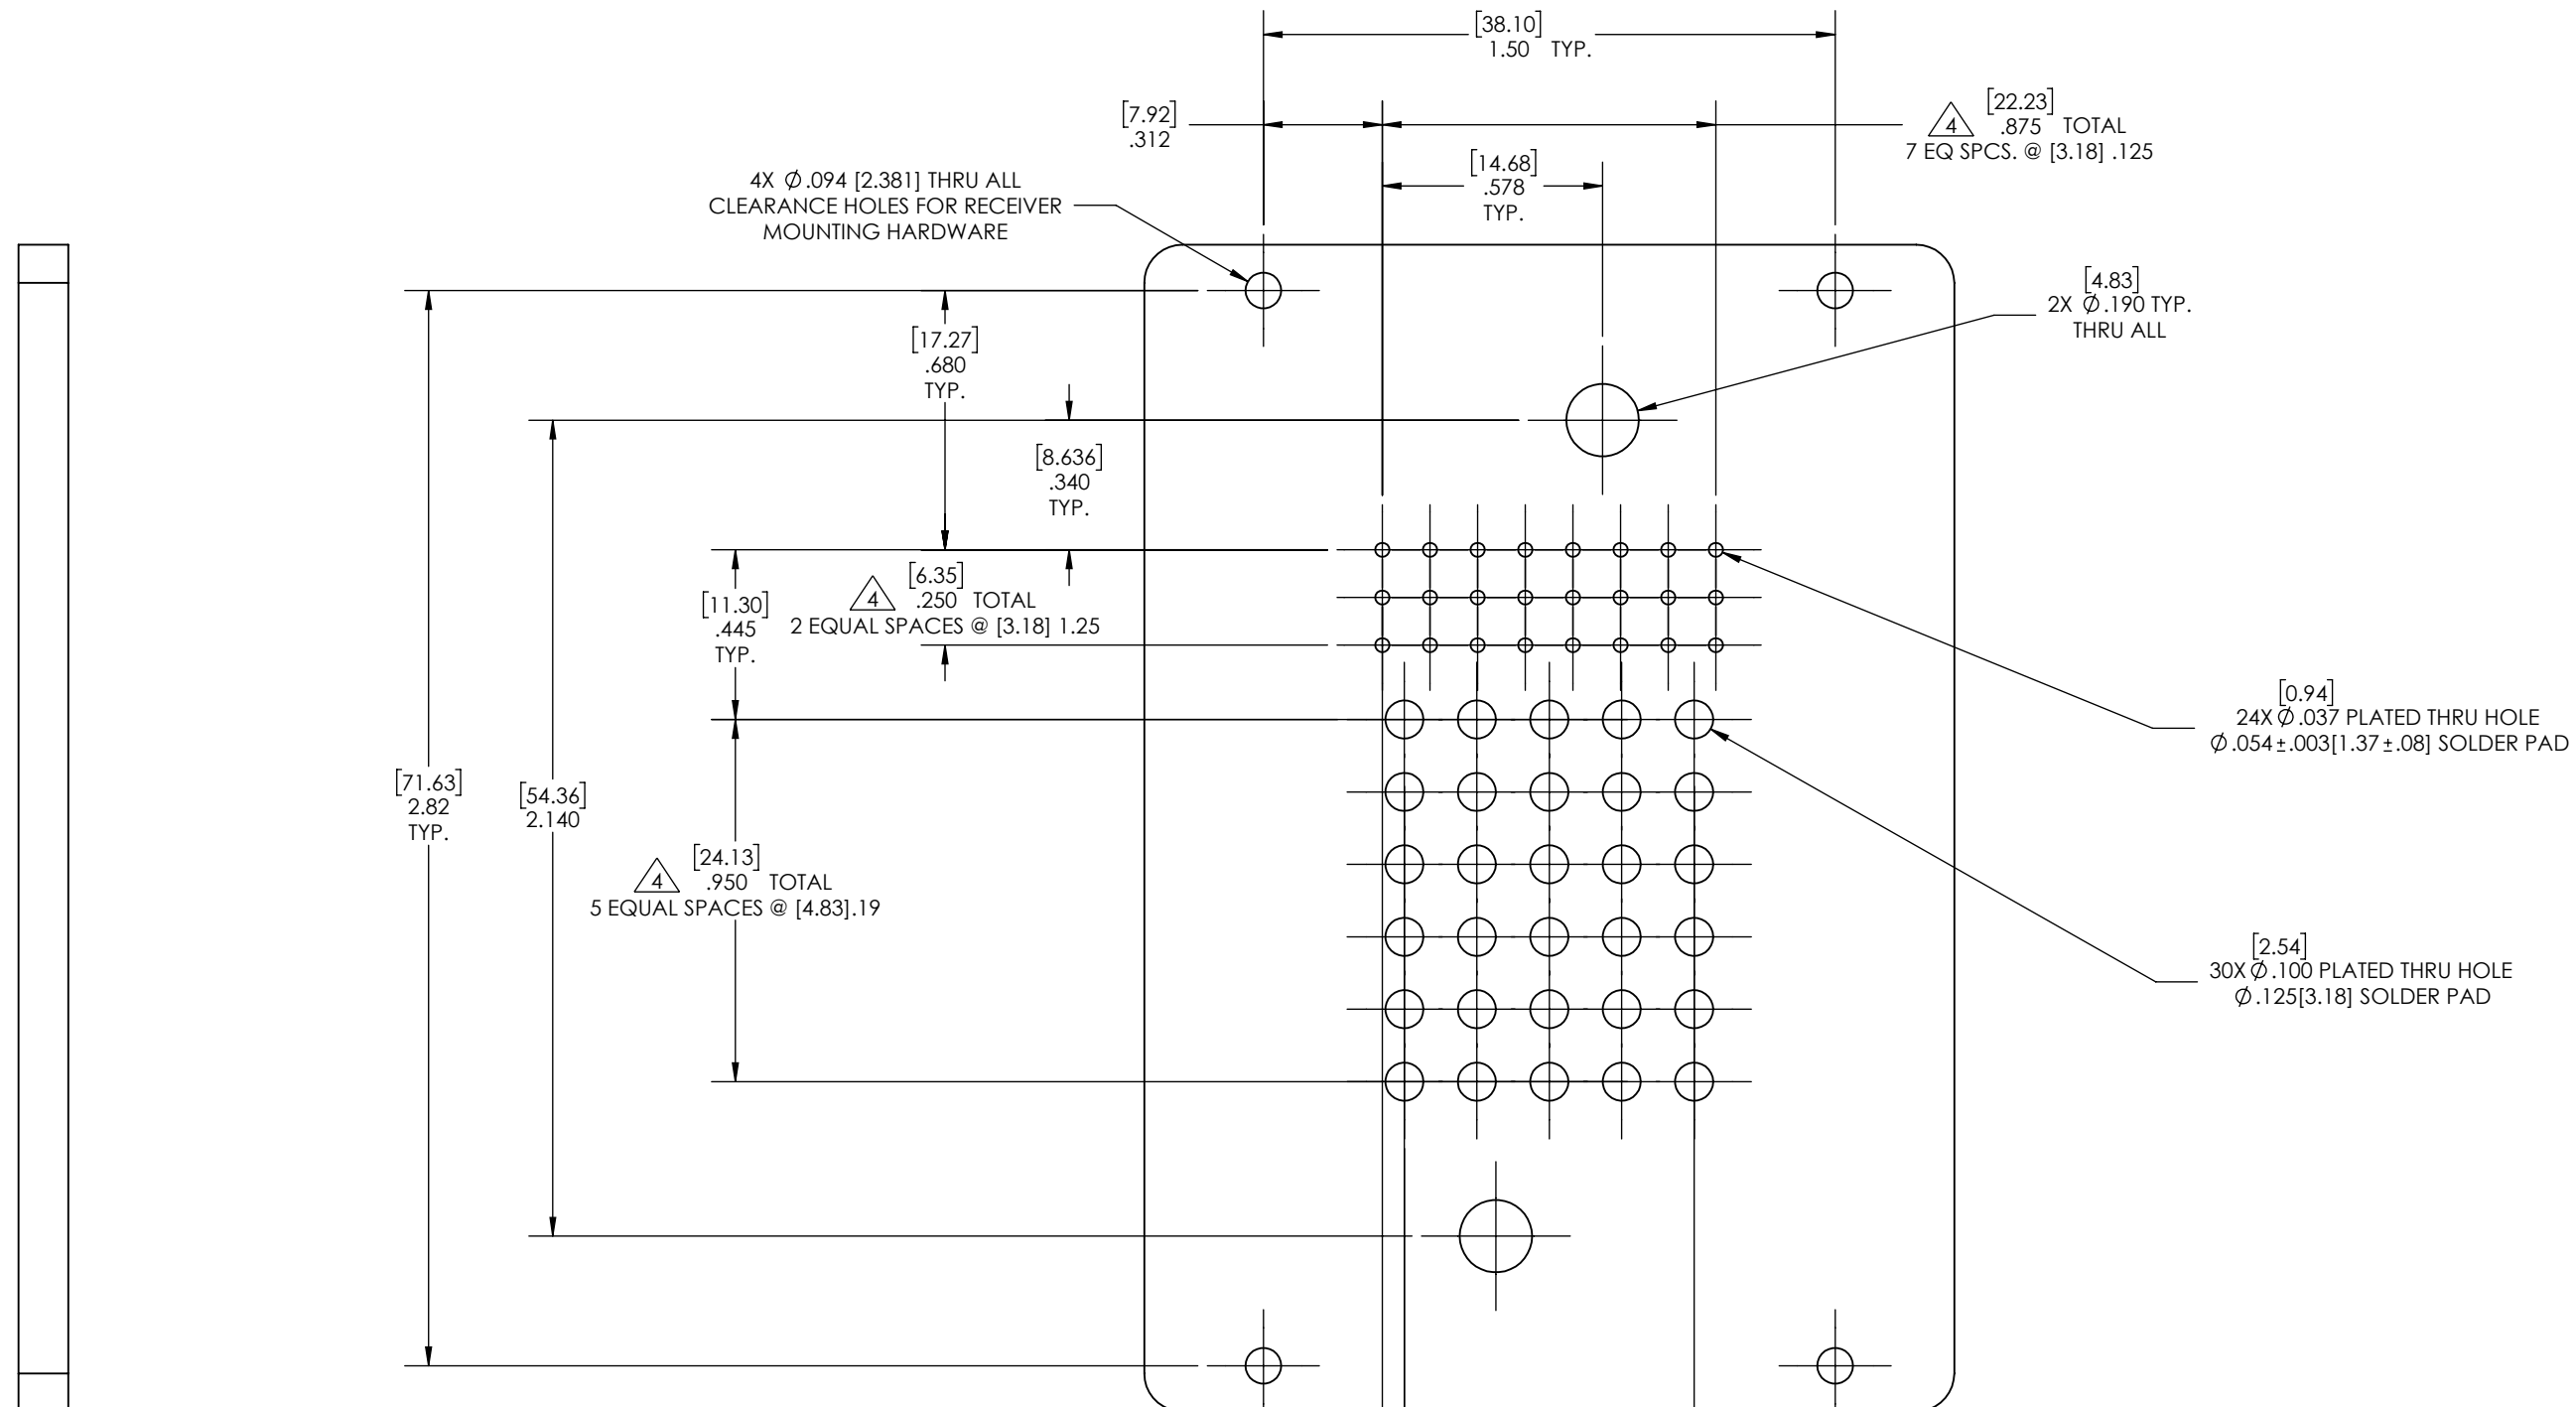

[3.30] .130 PCB THICKNESS TYP.
.062 MIN/.150 MAX USED WITH TRIMMING OF PINS POST SOLDERING

RECOMMENDED PCB LAYOUT
CONNECTOR MOUNTS THIS SIDE
TOLERANCES ARE:
.XX = \pm [.25].01
.XXX = \pm [.13].005
UNLESS OTHERWISE SPECIFIED

CUSTOMER DRAWING - CUSTOMER DRAWING - CUSTOMER DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

DWG.NO.		REV	
510160128		C	
SIZE	SCALE	CAGE CODE	SHEET
B	NONE	18117	2 OF 2

DO NOT SCALE DRAWING

\triangle .0021 LOCATION TOLERANCE APPLIES TO PLATED THRU HOLES

4

3

2

1