

4

3




2

1

DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

REV	DESCRIPTION	DATE	ENGINEER
C	ECN #15032	06/04/2025	C. Amaya

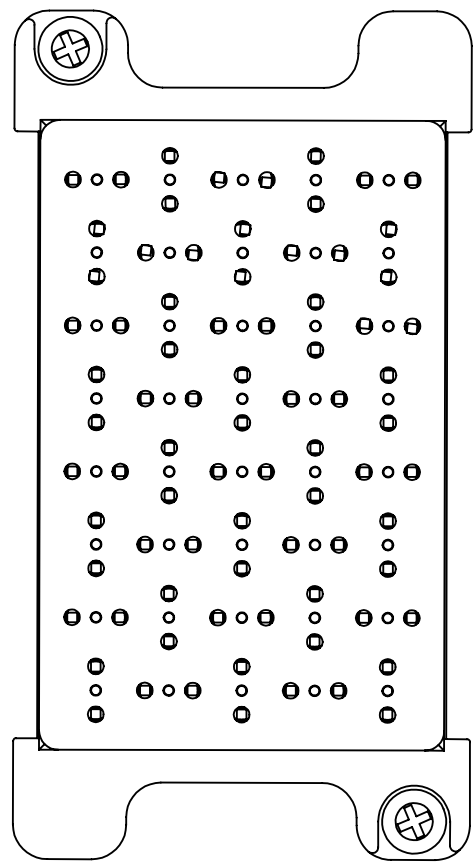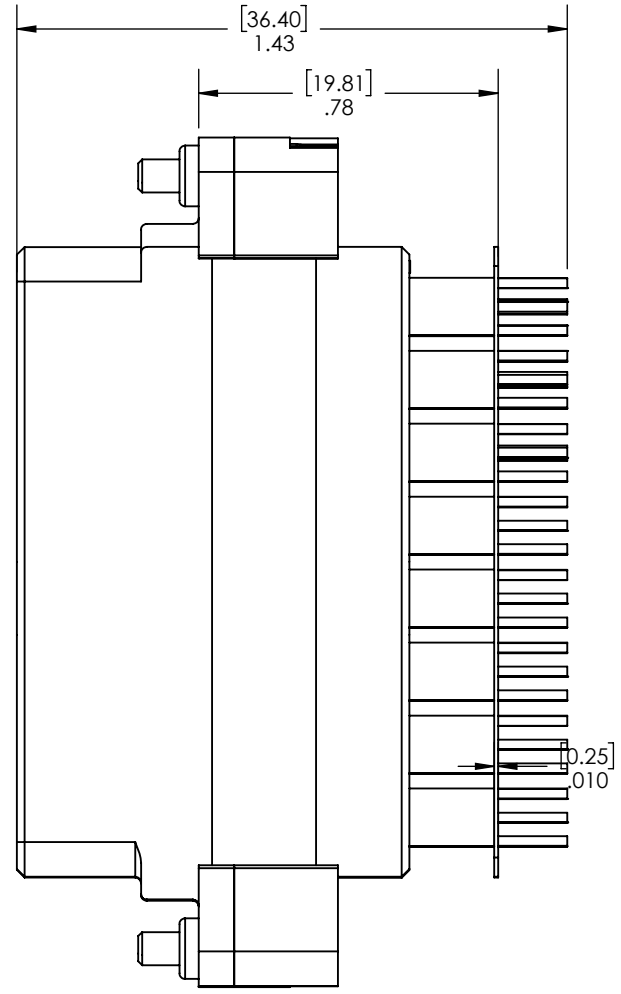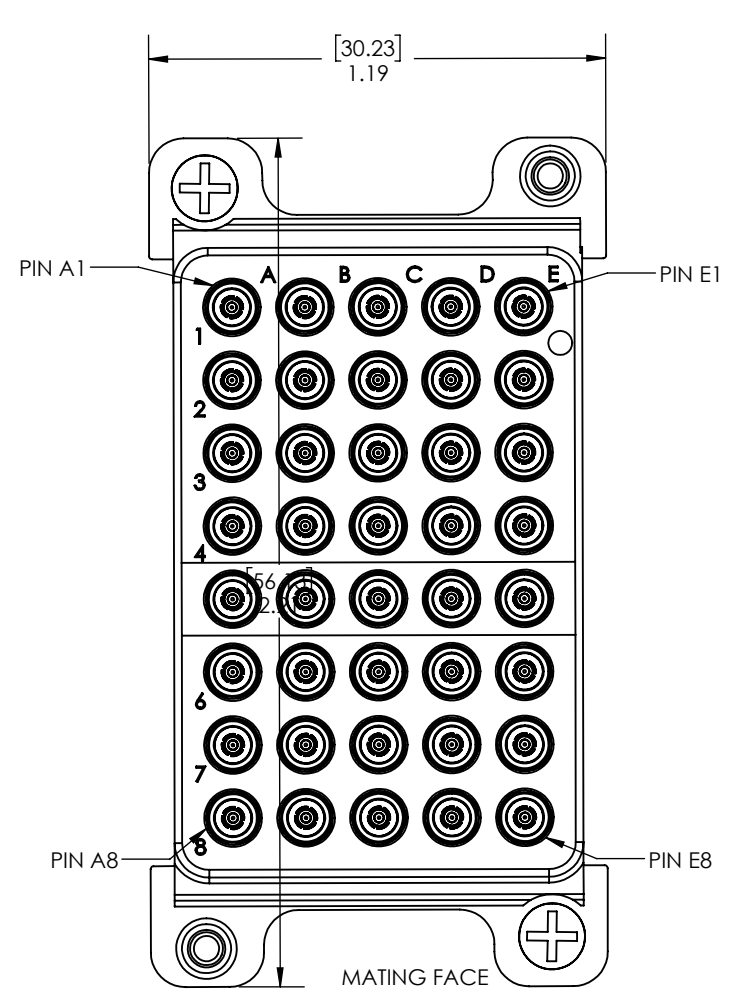

2. SEE SHEET 2 FOR NOTE 2.  
 1. FOR MORE INFORMATION, VISIT VPC.COM.  
 NOTES:

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT  
 DIMENSIONS ARE SHOWN AS:  
 [MILLIMETERS]  
 INCHES

**CUSTOMER DRAWING**

RCV MOD, ISERIES 40 POS  
 FULLY LOADED W/PCB MCRXC


DWG.NO.	510160129	REV	C
SCALE	NONE	CAGE CODE	18117
		SHEET	1 OF 2

4

3

2

1

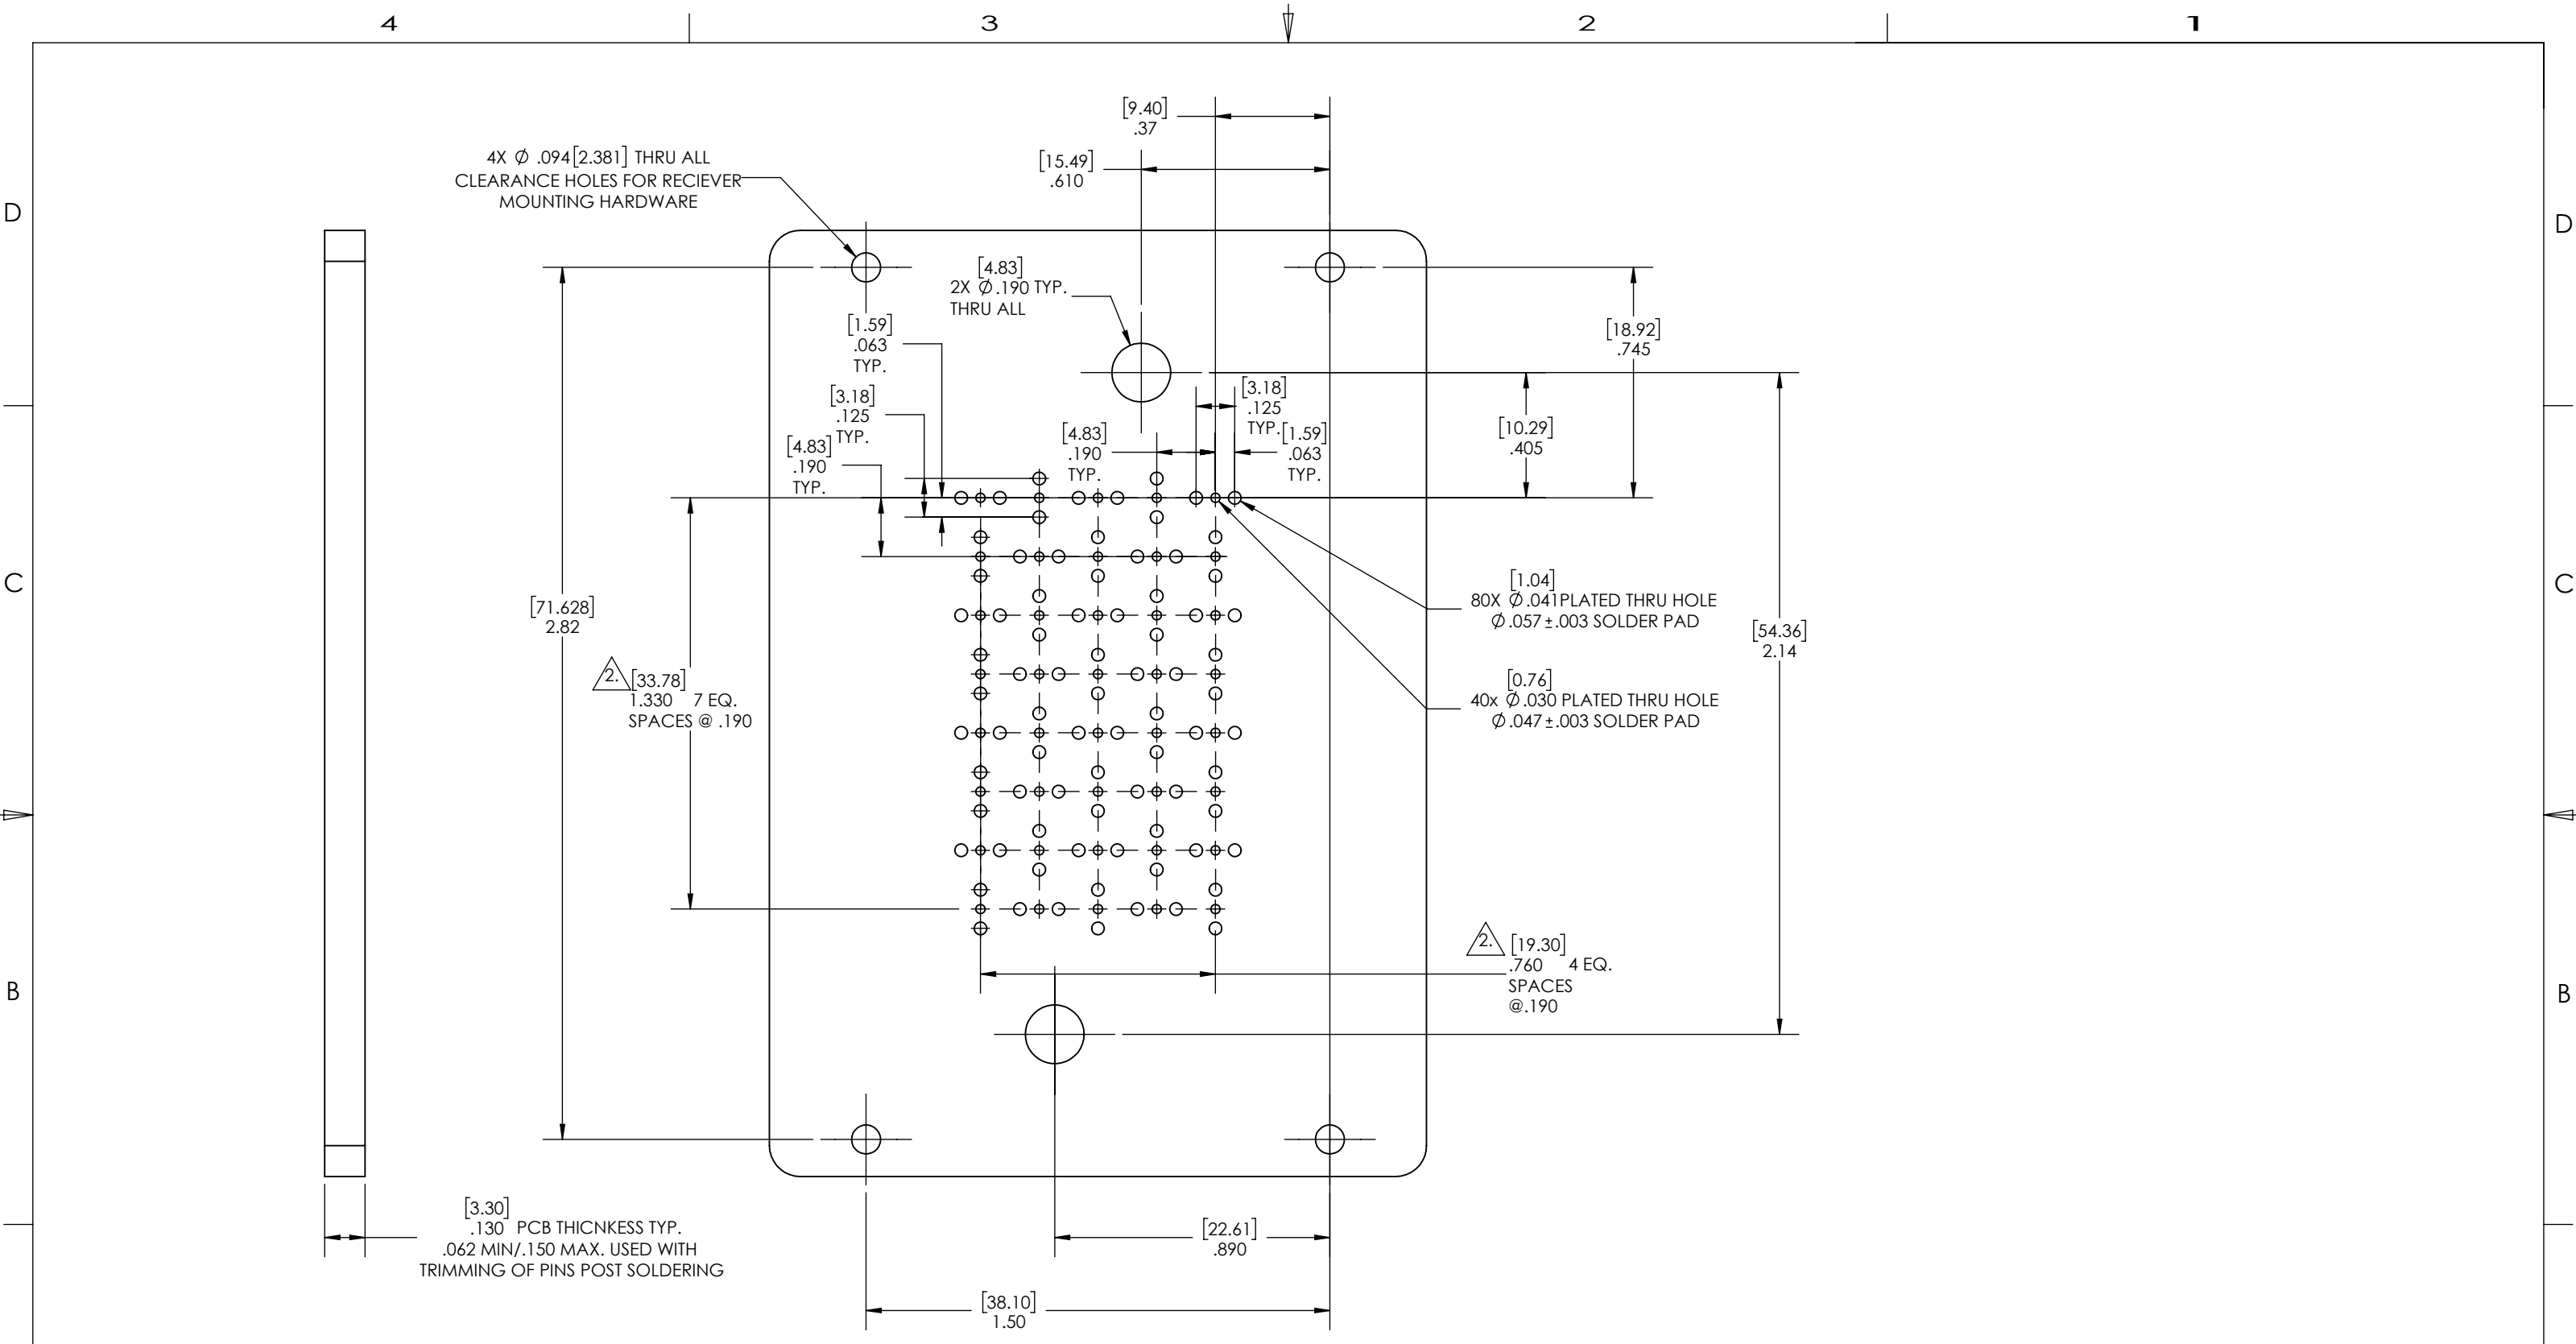

**RECOMMENDED PCB LAYOUT  
CONNECTOR MOUNTS THIS SIDE  
TOLERANCES ARE:  
XX= ±[0.25] .01  
XXX= ±[0.13] .005  
UNLESS OTHERWISE SPECIFIED**

CUSTOMER DRAWING - CUSTOMER DRAWING - CUSTOMER DRAWING		
DWG.NO.	510160129	REV C
SCALE NONE	CAGE CODE 18117	SHEET 2 OF 2

2. ±.002 LOCATION TOLERANCE APPLIES TO PLATED THRU HOLES

DO NOT SCALE DRAWING