


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
D	ECN # 5574	10/21/14	D ASHBY

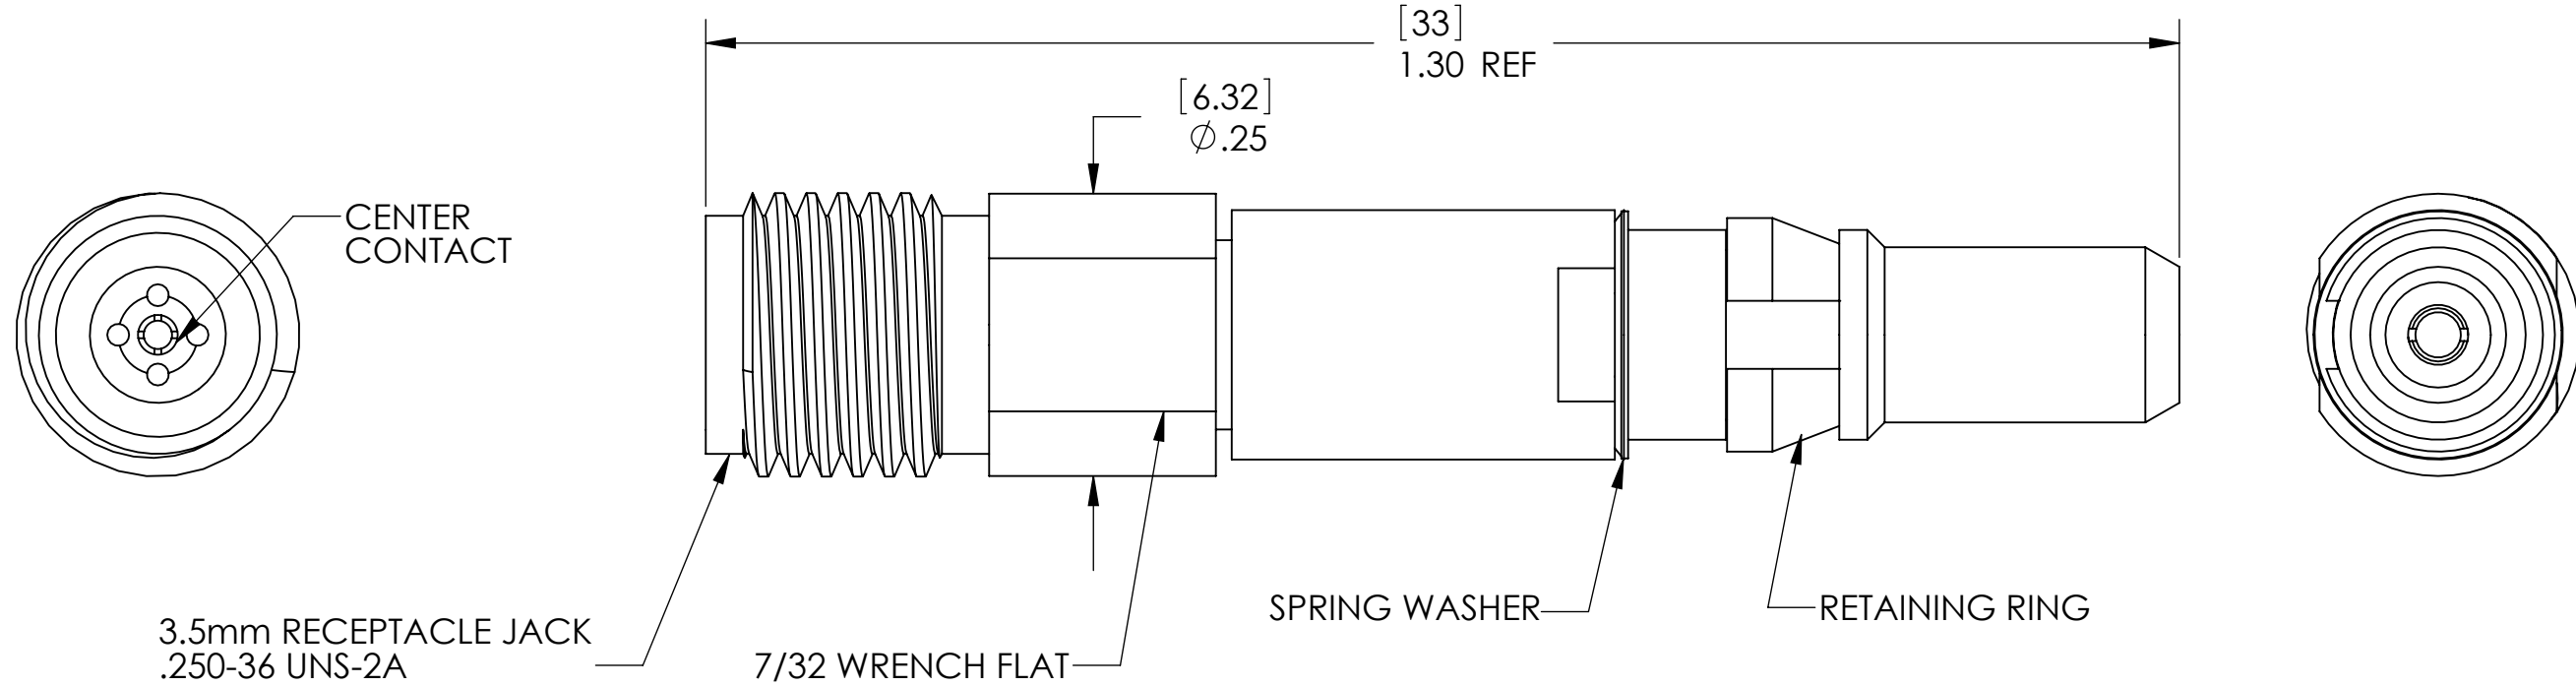

ELECTRICAL SPECIFICATIONS:
 IMPEDANCE: 50 OHMS
 BANDWIDTH: DC UP TO 26 GHz

COMPONENT	MATERIAL	FINISH
BODY	BRASS PER ASTM B 16	.000050" GOLD
DIELECTRIC	VIRGIN TEFLON (PTFE) PER ASTM D 1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196	.000050" GOLD OVER NICKEL
SPRING WASHER	BERYLLIUM COPPER PER ASTM-B-196	.000050" GOLD
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194	.000050" MIN. NICKEL

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION
WWW.VPC.COM

CNT CX ITA 50OHM 20/26GHZ
3.5 mm JACK ADAPTER

NOTES:
 1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM
 2. FOR USE WITH AN SMA. 3.5mm & 2.92 mm PATCHCORD.

DIMENSIONS ARE SHOWN AS: [MILLIMETERS] INCHES	SIZE	CAGE CODE	DWG.NO.	REV
	B	18117	610102134	D
SCALE: NONE		610102134	4/8/2009	SHEET 1 OF 1