


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
E	ECN #6592	2/26/16	DMA

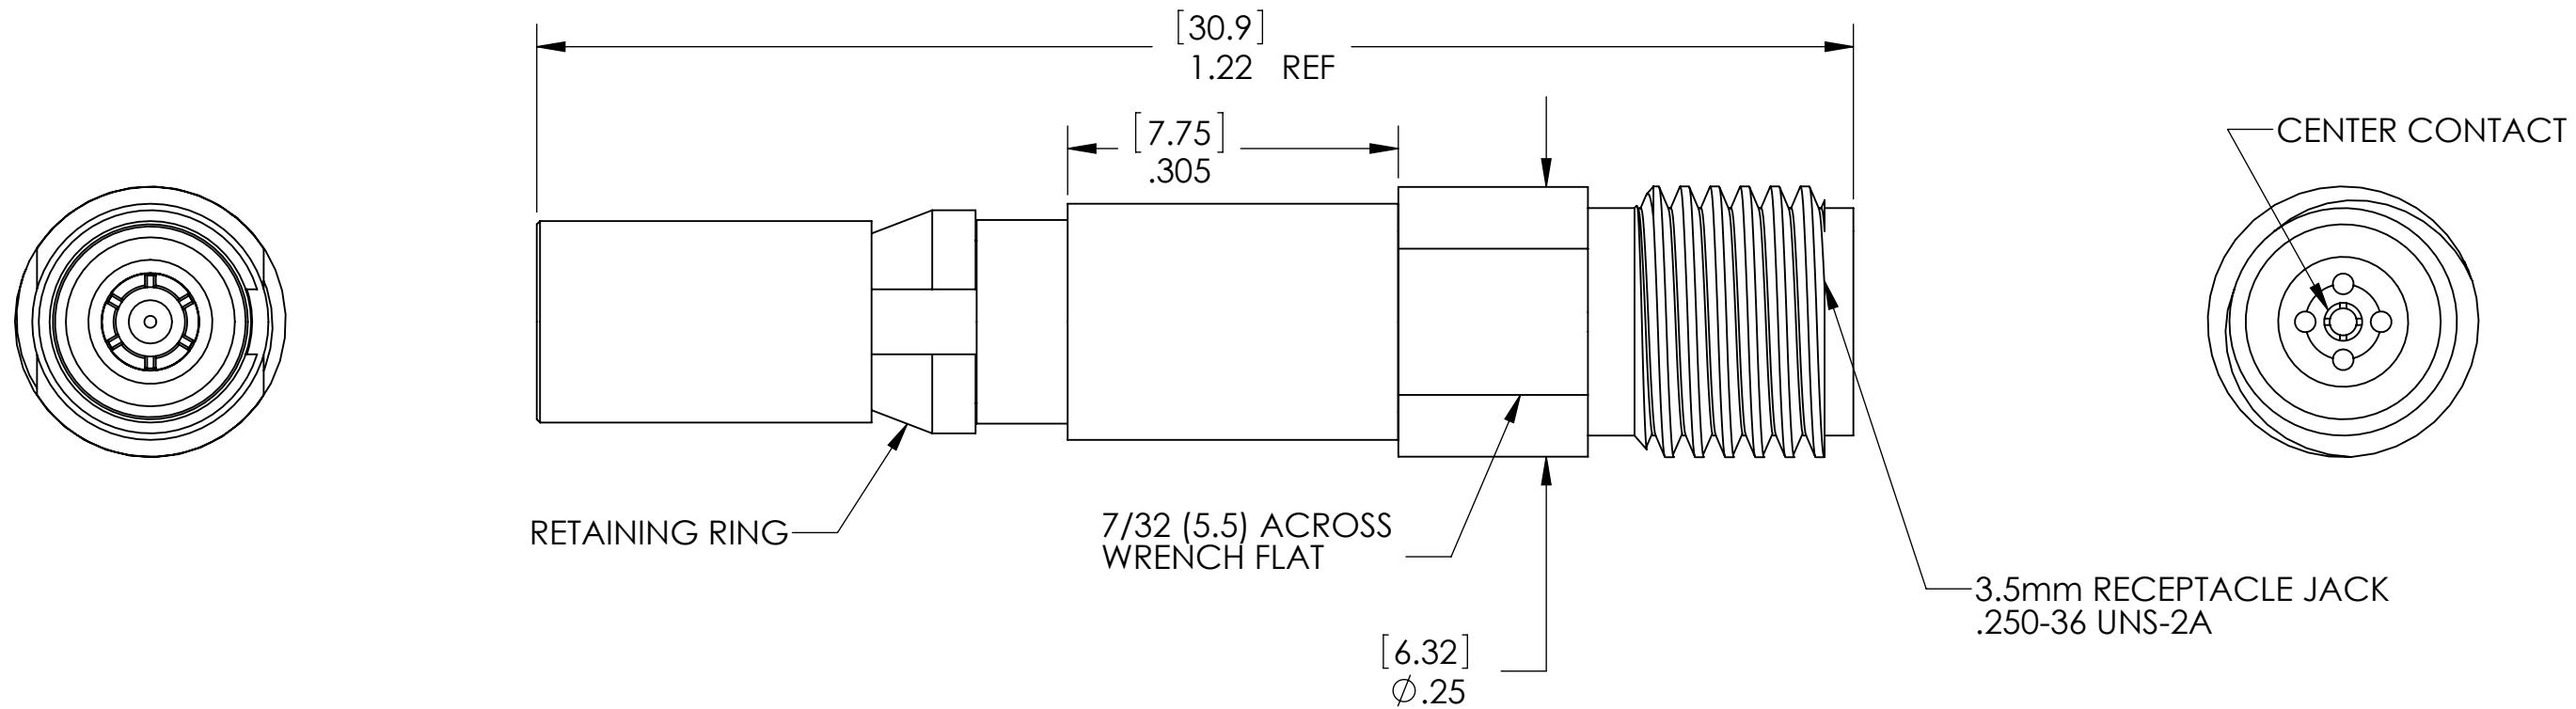

ELECTRICAL SPECIFICATIONS:
 IMPEDANCE: 50 OHMS
 BANDWIDTH: DC UP TO 26 GHz

COMPONENT	MATERIAL	FINISH
BODY	BRASS PER ASTM B 16	.000050" GOLD
DIELECTRIC	VIRGIN TEFLON (PTFE) PER ASTM D 1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196	.000050" GOLD OVER NICKEL
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194	NICKEL PLATE .00005" MIN.

NOTES:
 1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM
 2. FOR USE WITH AN SMA. 3.5mm & 2.92 mm PATCHCORD.

DIMENSIONS ARE SHOWN AS:
 [MILLIMETERS]
 INCHES

CUSTOMER DRAWING			
VIRGINIA PANEL CORPORATION WWW.VPC.COM			
CNT CX RCV 50OHM 20/26GHZ 3.5mm JACK ADAPTER			
SIZE	CAGE CODE	DWG.NO.	REV
B	18117	610102135	E
SCALE: NONE		610102135	4/8/09 SHEET 1 OF 1