
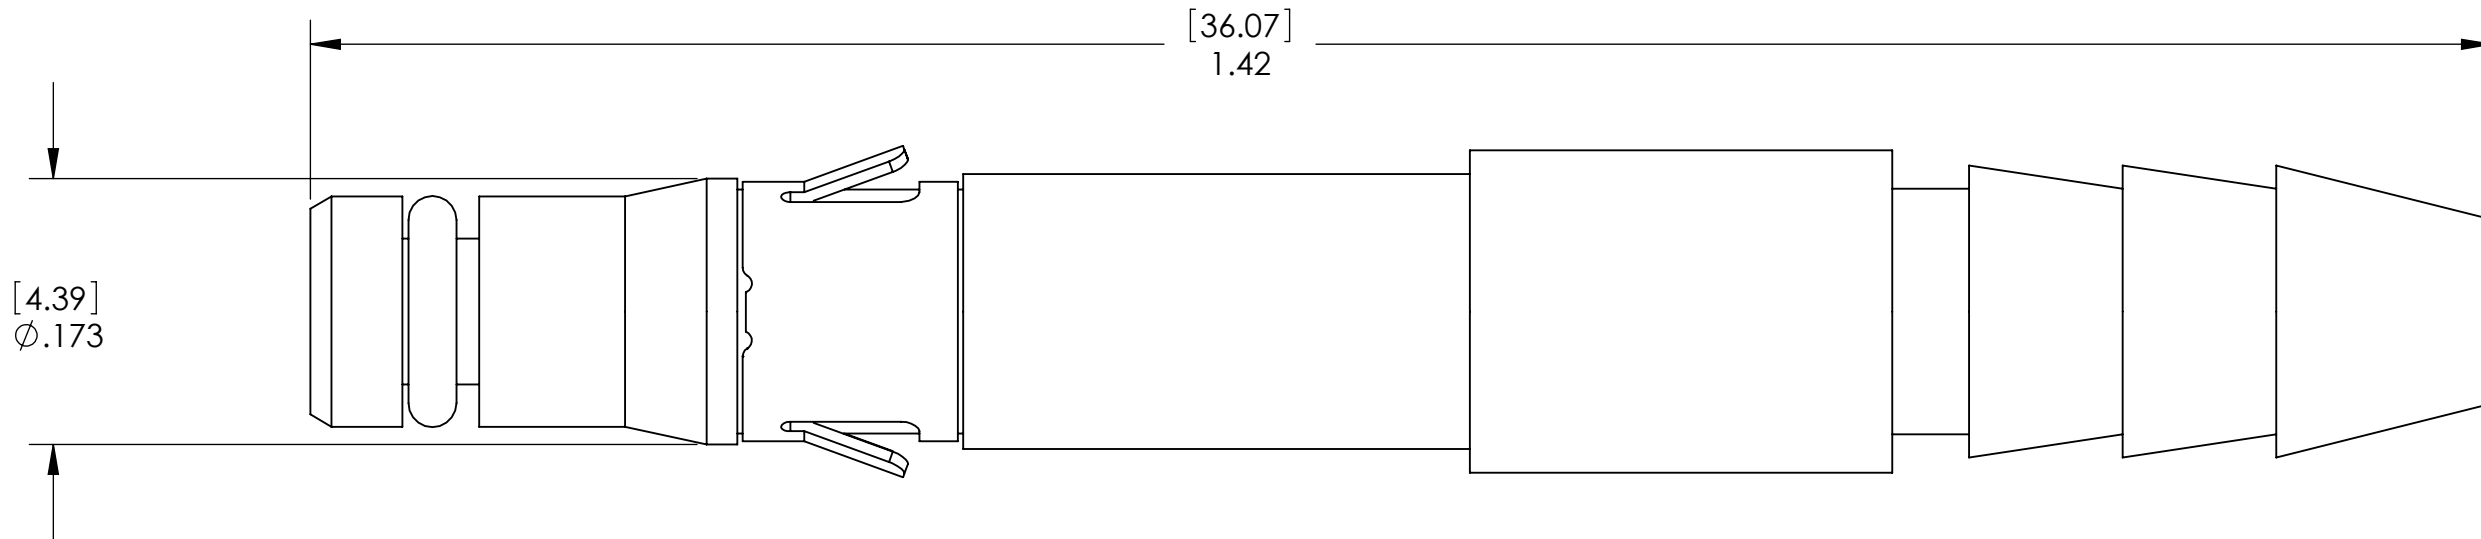


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
B	ECN #8377	7/11/2018	R GARMAN

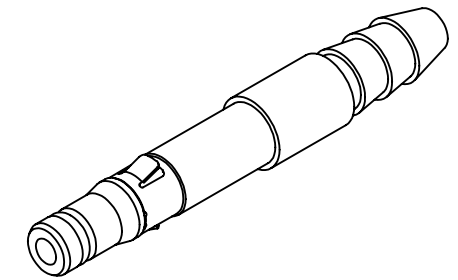

- NOTES:
1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM
 2. USE 1/8" [4mm] INNER DIAMETER HOSE.
 3. RECOMMENDED PRESSURE: 100psi
 4. ADJACENT POSITION LOADING MAY BE LIMITED BY TUBING WITH A WALL THICKNESS GREATER THAN 1/32"
 5. CONTACT FITS MINI POWER AND MINI COAXIAL ITA MODULES

CUSTOMER DRAWING			
VIRGINIA PANEL CORPORATION WWW.VPC.COM			
PNEUMATIC CONTACT, ITA HOSE BARB, 1/8 ID [4mm]			
DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG.NO.
[MILLIMETERS] INCHES	B	18117	610132106
	SCALE: 8:1	610132106	3/5/07 SHEET 1 OF 1