

З

## 2 THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHILE OR IN PART FOR ANY PURCES OTHER THAN TO MAINTAIN THE EQUIPMENT PROVID

REV Е



PIN #	TOTAL
	LENGTH
1	0.643
	[16.3322]
2	0.747
	[18.9738]
3	0.87
	[22.098]
4	0.999
	[25.3746]
5	1.128
	[28.6512]
6	1.256
	[31.9024]
7	1.385
/	[35.179]
8	1.517
	[38.5318]


D


С


 $\Rightarrow$ 


В

А





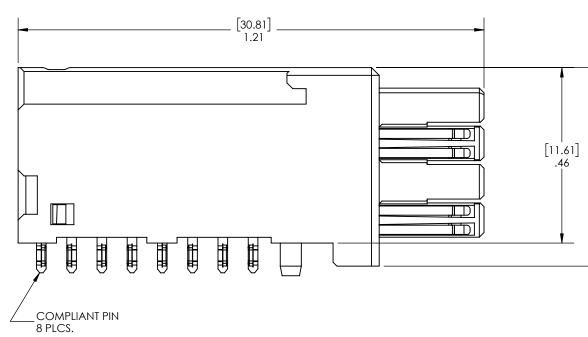

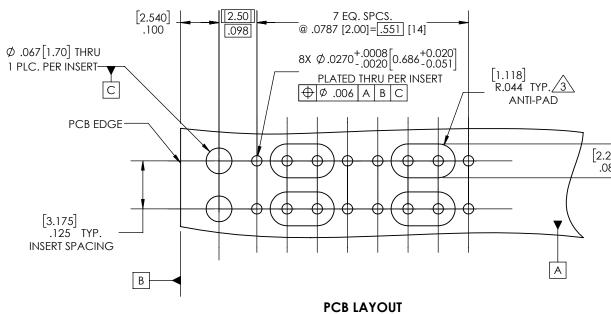

CONTACT LENGTHS ARE PROVIDED FOR TRACE LENGTH MATCHING.

5. SEE SHEET TO FOR NOTE.

RECOMMENDED PCB LAYOUT CONNECTOR MOUNTS THIS SIDE BOARD THICKNESS = .062 [1.57] DIMENSION TOLERANCE = ±.005 [.13] UNLESS OTHERWISE SPECIFIED

 $\cancel{3}$  anti-pad required for use with high speed differential signals.

2. SEE SHEET 2 FOR ADDITIONAL PCB LAYOUT INFORMATION.


1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM NOTES:

4

З

2

	1	
DESCRIPTION	DATE	ENGINEER
ECN #12153	12/9/2021	M ECKERT
		D
[13.13] .52		<
		В
.235] 088 TYP.		
RELATIVE CONNECTOR POSITIONS AND WI ROUTING ARE GENERIC AND MAY VARY W PINOUT DIMENSIONS ARE SHOWN A		RCV/ITA, OS, 1SL
[MILLIMETERS] INCHES	SCALE CAGE CODE 4:1 18117	SHEET 1 OF 2

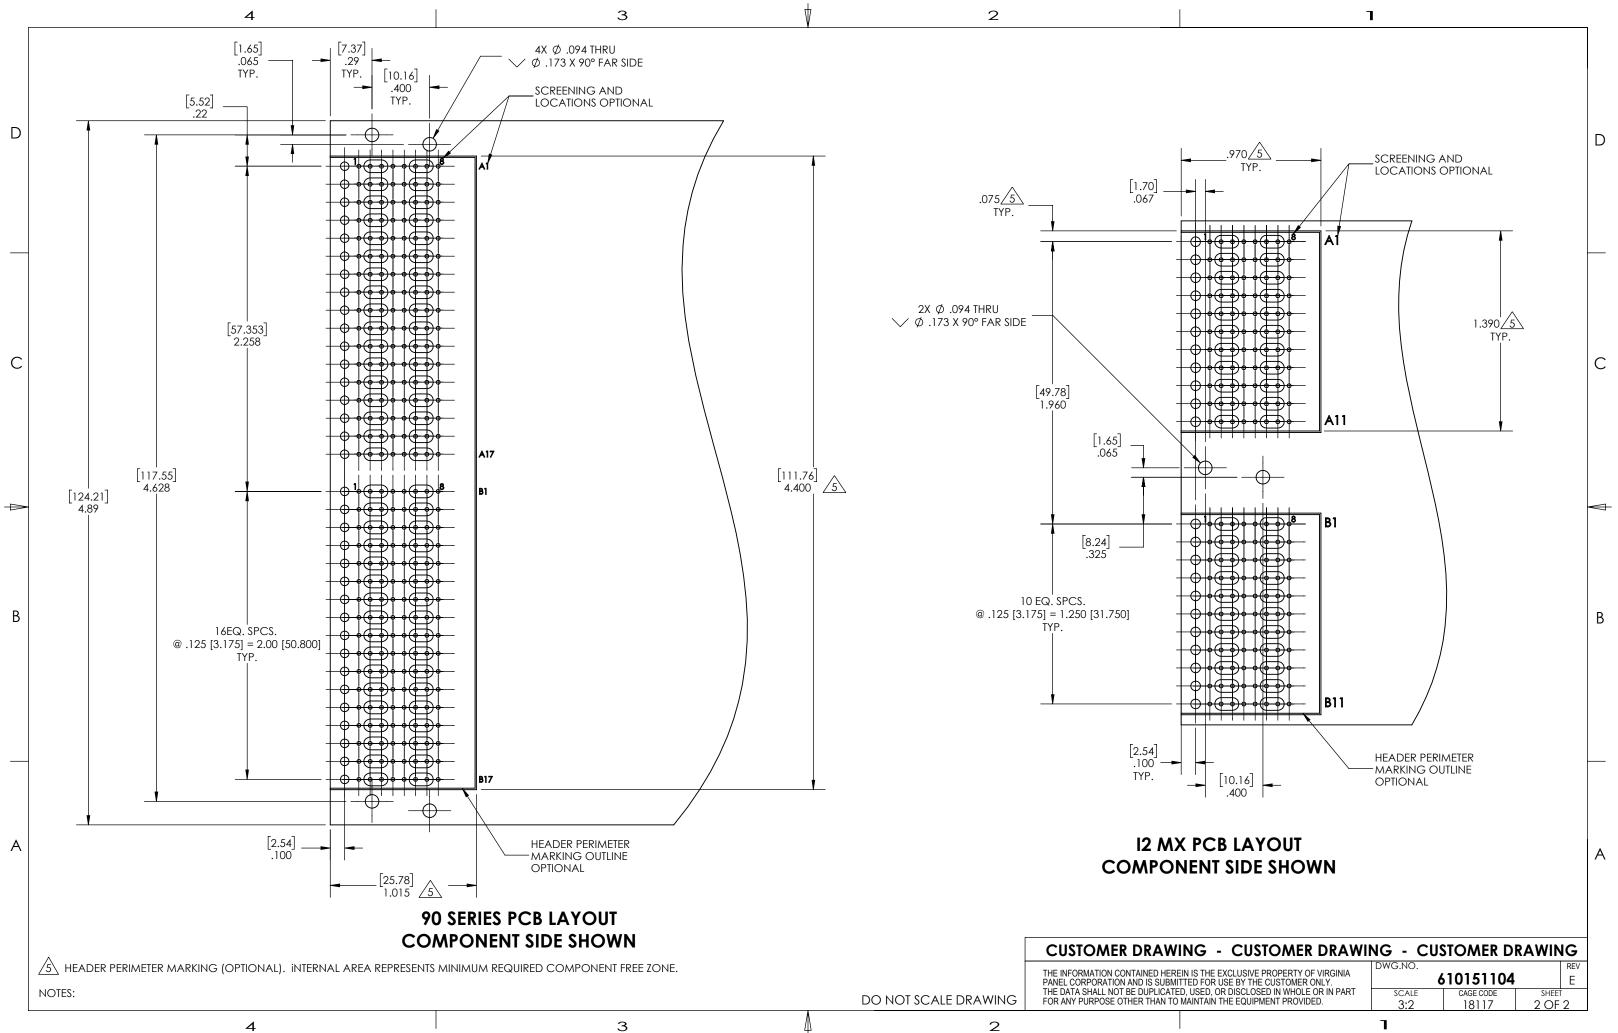

З