
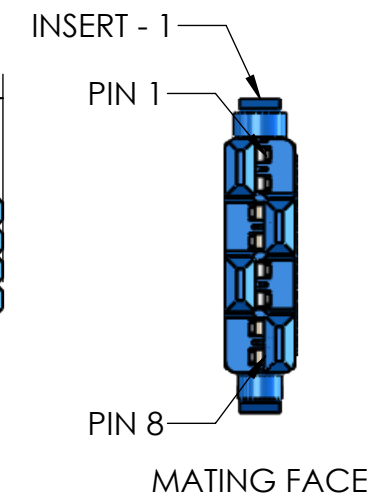
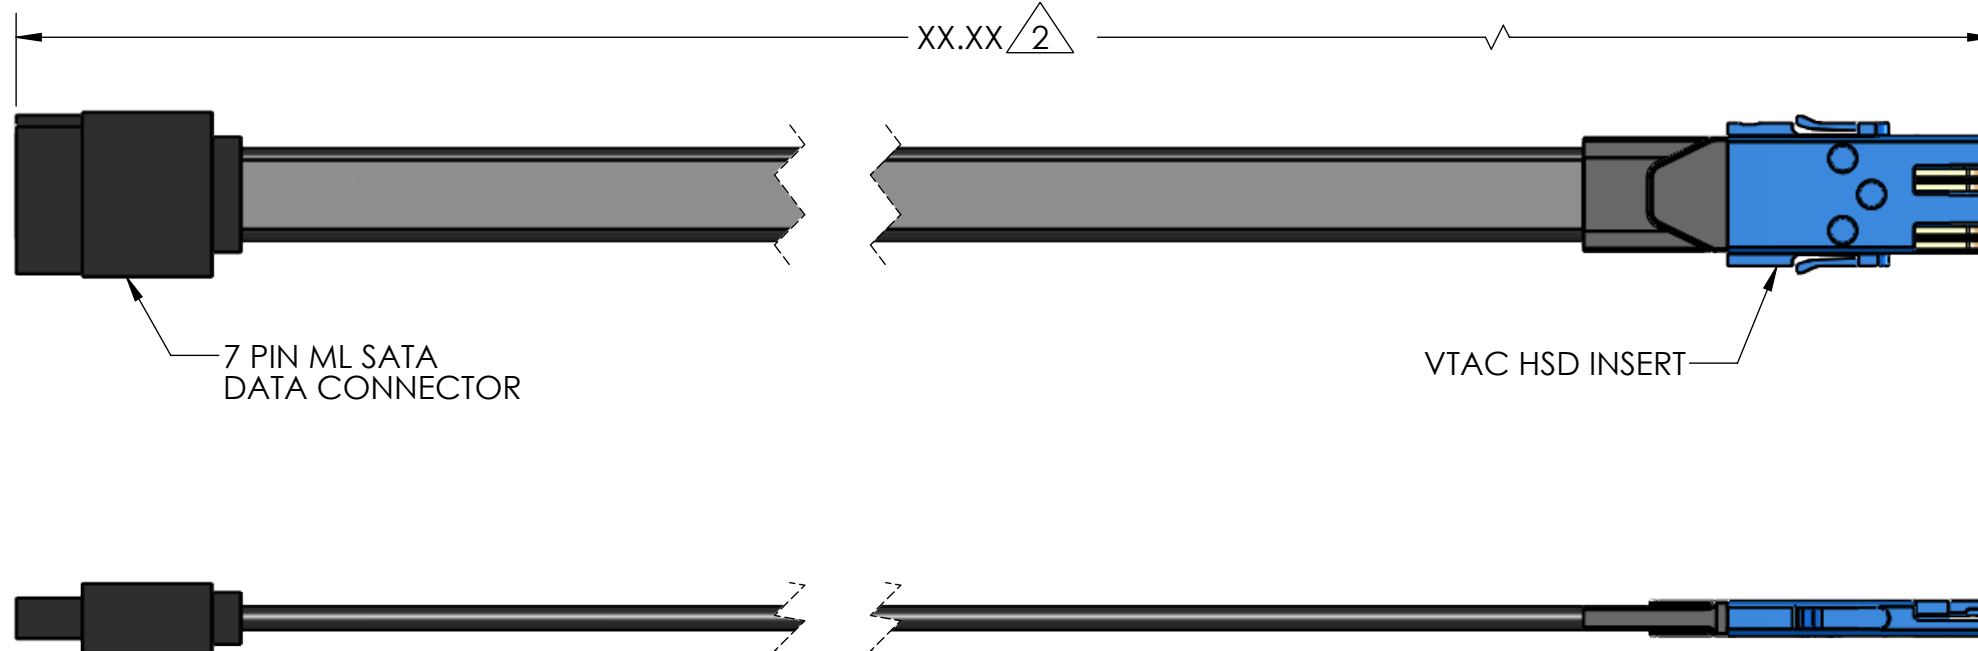


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REV	DESCRIPTION	DATE	ENGINEER
E	ECN #10322	5/22/2020	J BRYAN

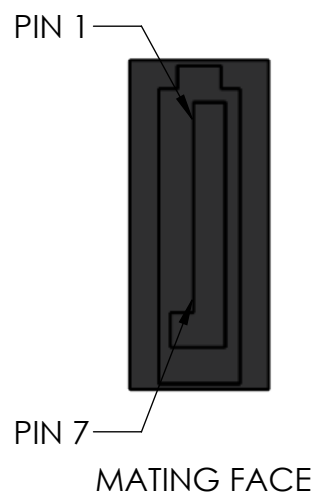

SATA PIN	SIGNAL	INSERT 1
1	GND	1
2	TXP / A+	2
3	TXP / A-	3
4	GND	4
	GND	5
5	RXN / B-	6
6	RXP / B+	7
7	GND	8

2	PART NUMBER	LENGTH (XX.XX)
	7-142892700-012	12" [304.8]
	7-142892700-024	24" [609.6]
	7-142892700-036	36" [914.4]

CUSTOMER DRAWING



VTAC ITA INSERT

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT
 DIMENSIONS ARE SHOWN AS:
 [MILLIMETERS]
 INCHES

DWG.NO.		7-141892700		REV
				E
SIZE	SCALE	CAGE CODE	SHEET	
B	NONE	18117	1 OF 1	

- NOTES:
- FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM
 - SEE TABLE FOR PATCHCORD LENGTH BY PART NUMBER.
 - CABLE JACKET COLOR: RED
 - ALL GROUND CONNECTIONS ARE TIED TOGETHER.
 - PATCHCORD CONFORMS TO SATA VERSION 3.0 SPECIFICATION (6 Gbps).