

4

3

2




1

DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORP. AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	J	ECN # 15714	3/26/26	NBOODY

96 PIN SCSI RIGHT ANGLE MALE CONNECTOR. PIN 1 INDICATOR.

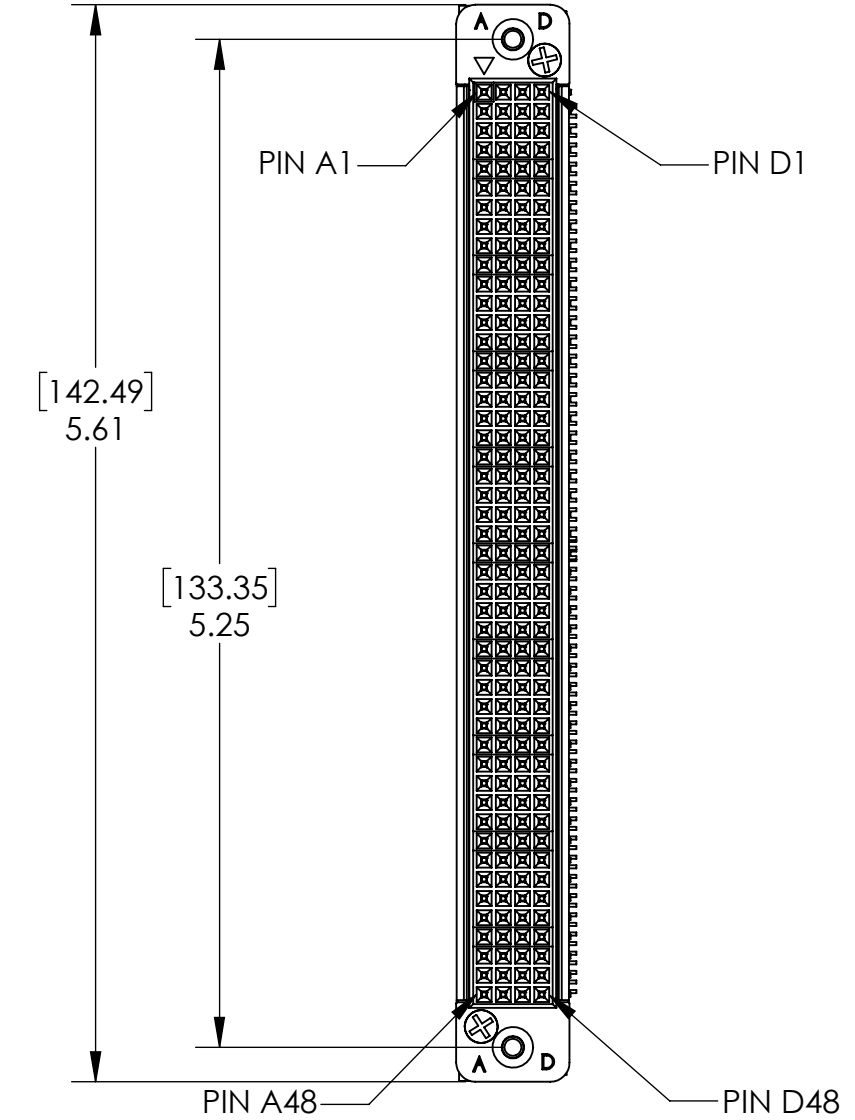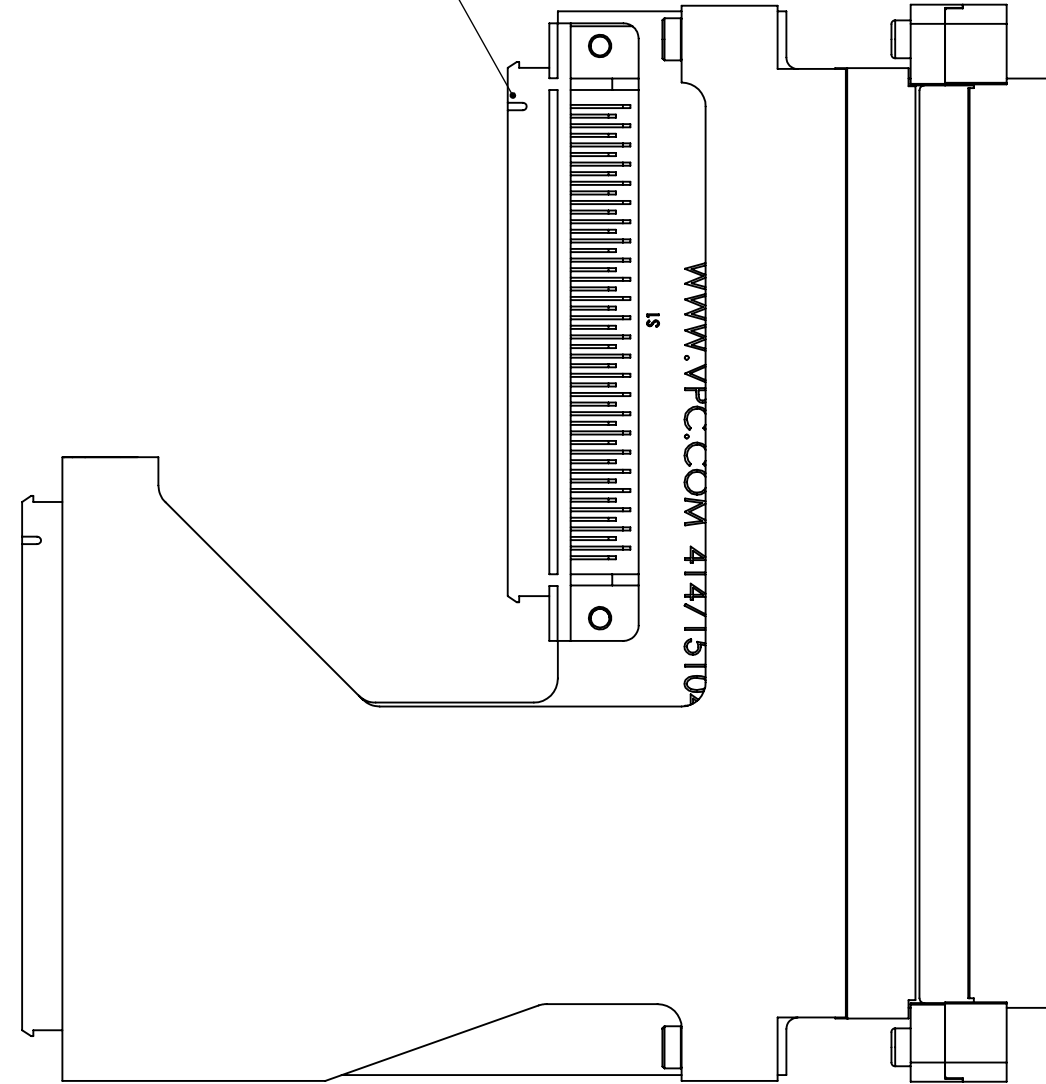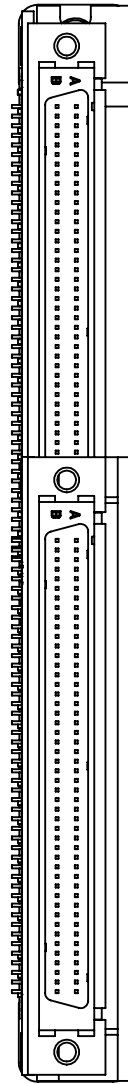

2. WHEN LOADING PCBs SIDE-BY-SIDE SOLDER TAILS COULD INTERFERE WITH ADJACENT PCBs.


TECHNICAL DATA:
CONNECTOR:
CURRENT = 1 AMP @ 30 VAC
TEMP = -55° to 105° C
TERMINATION RESISTANCE = 25 MILLIOHMS
ISULATION RESISTANCE = 1000 MEGAOHMS
DWV = 500 VAC
BOARD:
CURRENT = 1 AMP @ 30 VAC

MATERIALS:
CONNECTOR:
BRACKET = DIE CAST ZINC Ni PLATE OVER COPPER
INSULATOR = BLACK LCP
CONTACT = PHOS. BRONZE
CONTACT PLATING = MATING AREA - .00076 MIN GOLD
SOLDER POST - TIN LEAD. LEAD < 0.1% BY WEIGHT OVER ENTIRE Ni UNDERPLATE

BOARD: FR-4/21 w/ SOLDERMASK

1 FOR APPLICATION, USE & CARE INFORMATION CONSULT VPC USERS GUIDE @WWW.VPC.COM

NOTES:

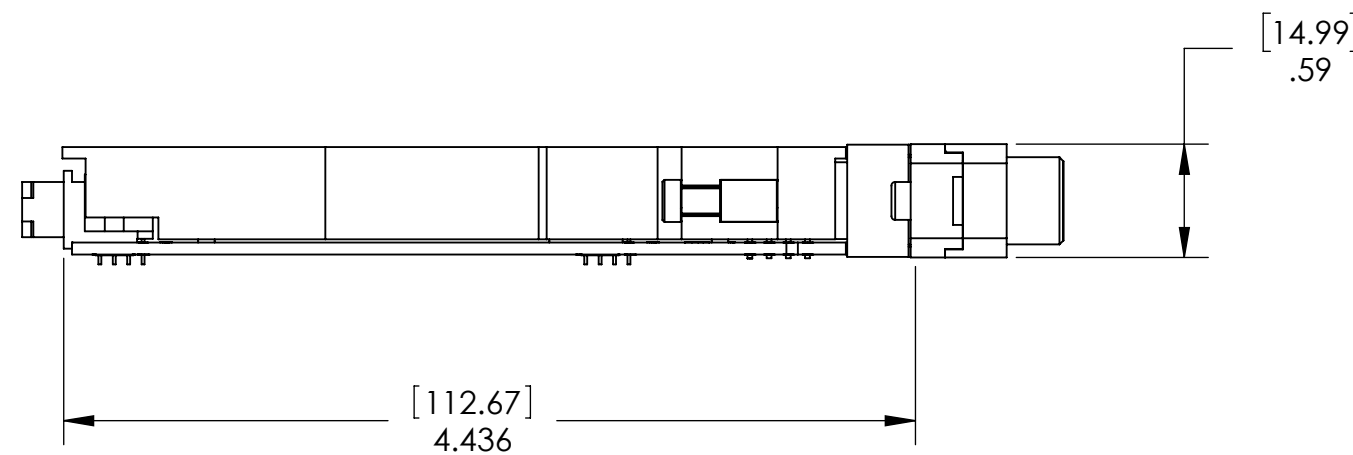

CUSTOMER DRAWING - CUSTOMER DRAWING

SOLIDWORKS DRAWING FILE	DIMENSIONS ARE SHOWN AS:		SIGNATURES		DATE	VIRGINIA PANEL CORPORATION			
	(millimeters)		DR	E. HUBBARD	3/30/04	WWW.VPC.COM			
	INCHES		CHK	R. HERRON	3/30/04	2-96 SCSI TO 192 MOD ADAP PCB			
	REMOVE BURRS. BREAK SHARP EDGES		ENG	E. HUBBARD	3/30/04	SIZE	FSCM NO.	DWG.NO.	REV
	MATERIAL		PROD			C	18117	510150128	J
FINISH		ASSY			SCALE: NONE		510150128	SHEET 1 OF 2	
		QA							
		APPD							

4

3

2

1

4

3

2

1

DO NOT SCALE DRAWING

S1			
SIGNAL TRACES 2-96 SCSI TO 192 MODULE			
A1-S1,50	A7-S1,62	A13-S1,74	A19-S1,86
B1-S1,49	B7-S1,61	B13-S1,73	B19-S1,85
C1-S1,2	C7-S1,14	C13-S1,26	C19-S1,38
D1-S1,1	D7-S1,13	D13-S1,25	D19-S1,37
A2-S1,52	A8-S1,64	A14-S1,76	A20-S1,88
B2-S1,51	B8-S1,63	B14-S1,75	B20-S1,87
C2-S1,4	C8-S1,16	C14-S1,28	C20-S1,40
D2-S1,3	D8-S1,15	D14-S1,27	D20-S1,39
A3-S1,54	A9-S1,66	A15-S1,78	A21-S1,90
B3-S1,53	B9-S1,65	B15-S1,77	B21-S1,89
C3-S1,6	C9-S1,18	C15-S1,30	C21-S1,42
D3-S1,5	D9-S1,17	D15-S1,29	D21-S1,41
A4-S1,56	A10-S1,68	A16-S1,80	A22-S1,92
B4-S1,55	B10-S1,67	B16-S1,79	B22-S1,91
C4-S1,8	C10-S1,20	C16-S1,32	C22-S1,44
D4-S1,7	D10-S1,19	D16-S1,31	D22-S1,43
A5-S1,58	A11-S1,70	A17-S1,82	A23-S1,94
B5-S1,57	B11-S1,69	B17-S1,81	B23-S1,93
C5-S1,10	C11-S1,22	C17-S1,34	C23-S1,46
D5-S1,9	D11-S1,21	D17-S1,33	D23-S1,45
A6-S1,60	A12-S1,72	A18-S1,84	A24-S1,96
B6-S1,59	B12-S1,71	B18-S1,83	B24-S1,95
C6-S1,12	C12-S1,24	C18-S1,36	C24-S1,48
D6-S1,11	D12-S1,23	D18-S1,35	D24-S1,47

S2			
SIGNAL TRACES 2-96 SCSI TO 192 MODULE			
A25-S2,50	A31-S2,62	A37-S2,74	A43-S2,86
B25-S2,49	B31-S2,61	B37-S2,73	B43-S2,85
C25-S2,2	C31-S2,14	C37-S2,26	C43-S2,38
D25-S2,1	D31-S2,13	D37-S2,25	D43-S2,37
A26-S2,52	A32-S2,64	A38-S2,76	A44-S2,88
B26-S2,51	B32-S2,63	B38-S2,75	B44-S2,87
C26-S2,4	C32-S2,16	C38-S2,28	C44-S2,40
D26-S2,3	D32-S2,15	D38-S2,27	D44-S2,39
A27-S2,54	A33-S2,66	A39-S2,78	A45-S2,90
B27-S2,53	B33-S2,65	B39-S2,77	B45-S2,89
C27-S2,6	C33-S2,18	C39-S2,30	C45-S2,42
D27-S2,5	D33-S2,17	D39-S2,29	D45-S2,41
A28-S2,56	A34-S2,68	A40-S2,80	A46-S2,92
B28-S2,55	B34-S2,67	B40-S2,79	B46-S2,91
C28-S2,8	C34-S2,20	C40-S2,32	C46-S2,44
D28-S2,7	D34-S2,19	D40-S2,31	D46-S2,43
A29-S2,58	A35-S2,70	A41-S2,82	A47-S2,94
B29-S2,57	B35-S2,69	B41-S2,81	B47-S2,93
C29-S2,10	C35-S2,22	C41-S2,34	C47-S2,46
D29-S2,9	D35-S2,21	D41-S2,33	D47-S2,45
A30-S2,60	A36-S2,72	A42-S2,84	A48-S2,96
B30-S2,59	B36-S2,71	B42-S2,83	B48-S2,95
C30-S2,12	C36-S2,24	C42-S2,36	C48-S2,48
D30-S2,11	D36-S2,23	D42-S2,35	D48-S2,47

4

3

2

1

CUSTOMER DRAWING				
DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG. NO.	REV
[MILLIMETERS]	C	18117	510150128	J
INCHES	SCALE: 1:1	510150128	SHEET 2 OF 2	