

4

3

2

1

DO NOT SCALE DRAWING




THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	ENGR
F	ECN #9128	5/30/19	K.CLEVELAND

D
C
B
A

D
C
B
A

192 POSITION QUADRAPADDLE MODULE
VPC PART # 510 150 130

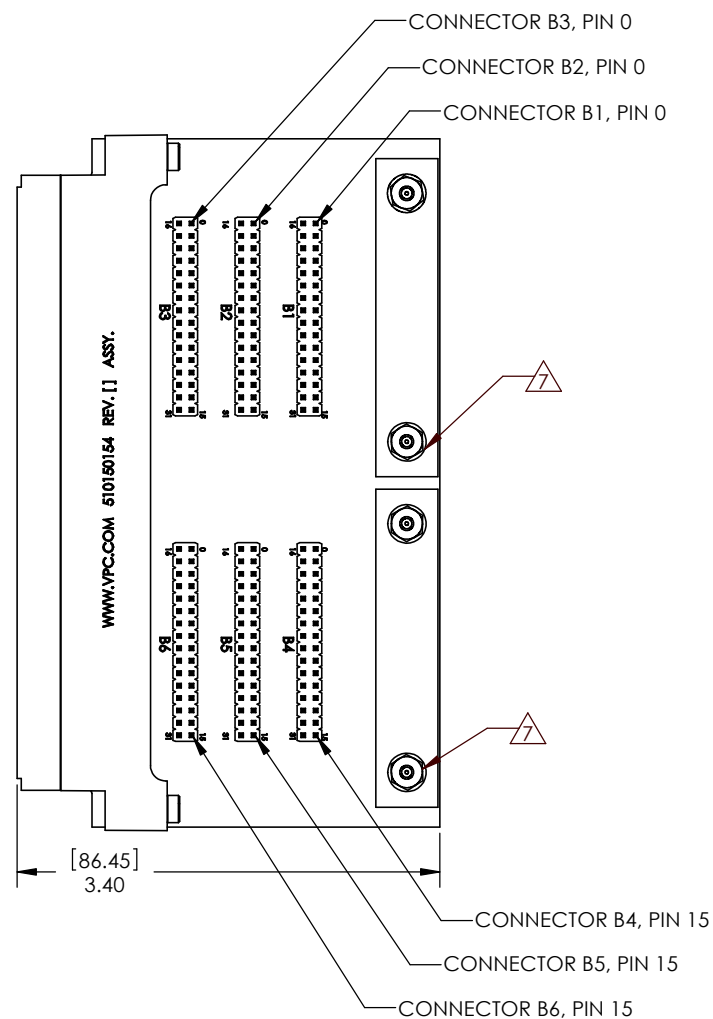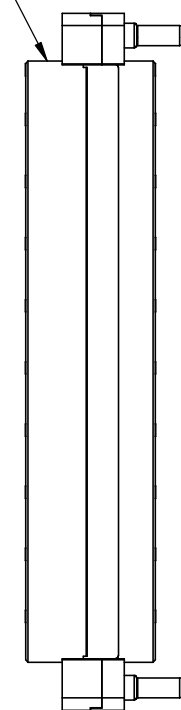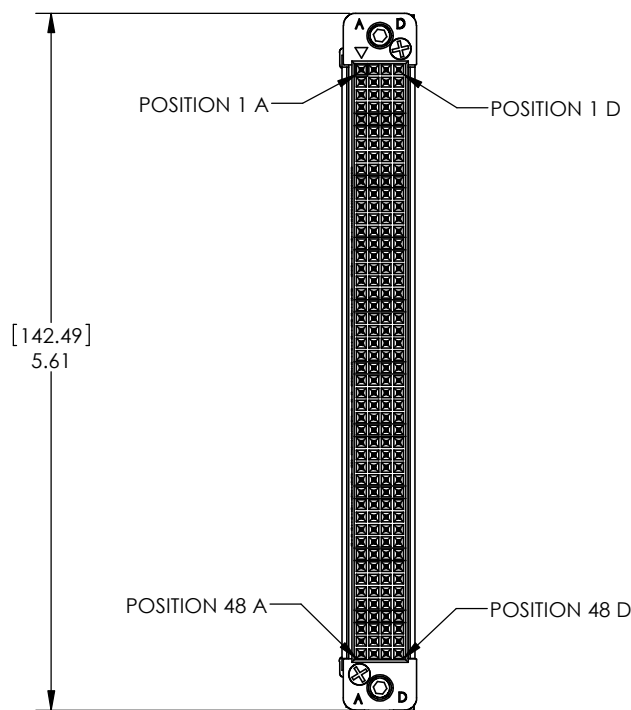

8. WHEN LOADING PCBs SIDE-BY-SIDE SOLDER TAILS COULD INTERFERE WITH ADJACENT PCBs.

LIMIT TORQUE TO 4 IN-LBS MAXIMUM ON NUTS

6. TECHNICAL DATA:
MATERIAL : BOARD FR4 w/SOLDERMASK
VPC CONNECTOR BLACK LCP w/GOLD PLATED BERYLIUM COPPER CONTACTS
BOARD CONNECTOR BLACK LCP w/GOLD PLATED PHOSPHOR BRONZE POSTS
CURRENT: 2 AMPERE CONTINUOUS @150V RMS

5. ITEMS SHIPPED LOOSE, NOT SHOWN
(QTY 2) 4-40X.13" THREADED STANDOFF
(QTY 2) 4-40X1.25" SOCKETHEAD CAP SCREW
(QTY 2) 4-40X.31" THREADED STANDOFF

4. SIX 32 PIN DOUBLE ENDED RIBBON CABLES, VPC PART # 515 109 163, INCLUDED AND ATTACHED TO THE PCB

3. THIS PCB ADAPTER WAS DESIGNED WITH A LEFT MOUNTED PC BOARD FOR OPTIMAL CABLE MANAGEMENT
DO NOT MOUNT BESIDE A PCB ADAPTER WITH A RIGHT MOUNTED PC BOARD

2. THIS PCB ADAPTER WILL ACCOMMODATE ONE OR TWO NATIONAL INSTRUMENTS TB-2634 TERMINAL BLOCKS
USE MATRIX 1 CONNECTORS - B1, B2 AND B3 FOR FIRST TERMINAL BLOCK
USE MATRIX 2 CONNECTORS - B4, B5 AND B6 FOR SECOND TERMINAL BLOCK

1. FOR APPLICATION USE & CARE INFORMATION CONSULT VPC USERS GUIDE @WWW.VPC.COM
NOTES:

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION
WWW.VPC.COM

PCB ADAPTER, RECEIVER, 192 POSITION
QUADRAPADDLE TO NI PXI-2529 WITH SIX 36" CABLES

DIMENSIONS ARE SHOWN AS:
[MILLIMETERS]
INCHES

SIZE	CAGE CODE	DWG.NO.	REV
C	18117	510150154	F
SCALE: 1:1	510150154	4/27/06	SHEET 1 OF 2

4


3

2

1

SIGNAL TRACES															
VPC Module	Connector	VPC Module	Connector	VPC Module	Connector	VPC Module	Connector	VPC Module	Connector	VPC Module	Connector	VPC Module	Connector	VPC Module	Connector
A1 >	B2-16	A25>	B3-24	B1 >	B2-0	B25>	B3-8	C1 >	B1-16	C25>	B6-24	D1 >	B1-0	D25>	B6-8
A2 >	B2-17	A26>	NC	B2 >	B2-1	B26>	NC	C2 >	B1-17	C26>	NC	D2 >	B1-1	D26>	NC
A3 >	B2-18	A27 >	B3-26	B3 >	B2-2	B27 >	B3-10	C3 >	B1-18	C27 >	B6-26	D3 >	B1-2	D27 >	B6-10
A4 >	B2-19	A28 >	NC	B4 >	B2-3	B28 >	NC	C4 >	B1-19	C28 >	NC	D4 >	B1-3	D28 >	NC
A5 >	B2-20	A29 >	B3-28	B5 >	B2-4	B29 >	B3-12	C5 >	B1-20	C29 >	B6-28	D5 >	B1-4	D29 >	B6-12
A6 >	B2-21	A30 >	NC	B6 >	B2-5	B30 >	NC	C6 >	B1-21	C30 >	NC	D6 >	B1-5	D30 >	NC
A7 >	B2-22	A31 >	B3-30	B7 >	B2-6	B31 >	B3-14	C7 >	B1-22	C31 >	B6-30	D7 >	B1-6	D31 >	B6-14
A8 >	B2-23	A32 >	NC	B8 >	B2-7	B32 >	NC	C8 >	B1-23	C32 >	NC	D8 >	B1-7	D32 >	NC
A9 >	B2-24	A33 >	B5-16	B9 >	B2-8	B33 >	B5-0	C9 >	B1-24	C33 >	B4-16	D9 >	B1-8	D33 >	B4-0
A10 >	B2-25	A34 >	B5-17	B10 >	B2-9	B34 >	B5-1	C10 >	B1-25	C34 >	B4-17	D10 >	B1-9	D34 >	B4-1
A11 >	B2-26	A35 >	B5-18	B11 >	B2-10	B35 >	B5-2	C11 >	B1-26	C35 >	B4-18	D11 >	B1-10	D35 >	B4-2
A12 >	B2-27	A36 >	B5-19	B12 >	B2-11	B36 >	B5-3	C12 >	B1-27	C36 >	B4-19	D12 >	B1-11	D36 >	B4-3
A13 >	B2-28	A37 >	B5-20	B13 >	B2-12	B37 >	B5-4	C13 >	B1-28	C37 >	B4-20	D13 >	B1-12	D37 >	B4-4
A14 >	B2-29	A38 >	B5-21	B14 >	B2-13	B38 >	B5-5	C14 >	B1-29	C38 >	B4-21	D14 >	B1-13	D38 >	B4-5
A15 >	B2-30	A39 >	B5-22	B15 >	B2-14	B39 >	B5-6	C15 >	B1-30	C39 >	B4-22	D15 >	B1-14	D39 >	B4-6
A16 >	B2-31	A40 >	B5-23	B16 >	B2-15	B40 >	B5-7	C16 >	B1-31	C40 >	B4-23	D16 >	B1-15	D40 >	B4-7
A17 >	B3-16	A41 >	B5-24	B17 >	B3-0	B41 >	B5-8	C17 >	B6-16	C41 >	B4-24	D17 >	B6-0	D41 >	B4-8
A18 >	NC	A42 >	B5-25	B18 >	NC	B42 >	B5-9	C18 >	NC	C42 >	B4-25	D18 >	NC	D42 >	B4-9
A19 >	B3-18	A43 >	B5-26	B19 >	B3-2	B43 >	B5-10	C19 >	B6-18	C43 >	B4-26	D19 >	B6-2	D43 >	B4-10
A20 >	NC	A44 >	B5-27	B20 >	NC	B44 >	B5-11	C20 >	NC	C44 >	B4-27	D20 >	NC	D44 >	B4-11
A21 >	B3-20	A45 >	B5-28	B21 >	B3-4	B45 >	B5-12	C21 >	B6-20	C45 >	B4-28	D21 >	B6-4	D45 >	B4-12
A22 >	NC	A46 >	B5-29	B22 >	NC	B46 >	B5-13	C22 >	NC	C46 >	B4-29	D22 >	NC	D46 >	B4-13
A23 >	B3-22	A47 >	B5-30	B23 >	B3-6	B47 >	B5-14	C23 >	B6-22	C47 >	B4-30	D23 >	B6-6	D47 >	B4-14
A24>	NC	A48 >	B5-31	B24>	NC	B48 >	B5-15	C24>	NC	C48 >	B4-31	D24>	NC	D48 >	B4-15

NC= NO CONNECT

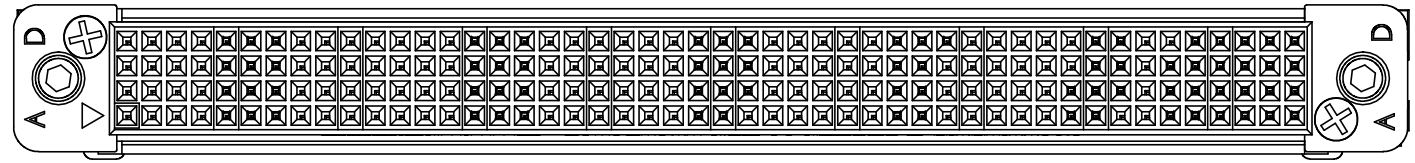

CONNECTOR B1																CONNECTOR B6																CONNECTOR B4															
D1-	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	0	1	2	3	0	1	2	3	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	D48						
C1+	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	0	1	2	3	0	1	2	3	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	C48						
B1-	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	0	1	2	3	0	1	2	3	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	B48						
A1+	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	0	1	2	3	0	1	2	3	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	A48						
CONNECTOR B2																CONNECTOR B3																CONNECTOR B5															

CUSTOMER DRAWING - CUSTOMER DRAWING - CUSTOMER DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

SIZE	CAGE CODE	DWG.NO.	REV
C	18117	510150154	F
SCALE:	2:1	510150154	4/27/06
		SHEET 2 OF 2	

DO NOT SCALE DRAWING

D
C
B
A

D
C
B
A

4 3 2 1

4 3 2 1