


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REV	DESCRIPTION	DATE	ENGINEER
D	ECN #14855	3/4/25	RF

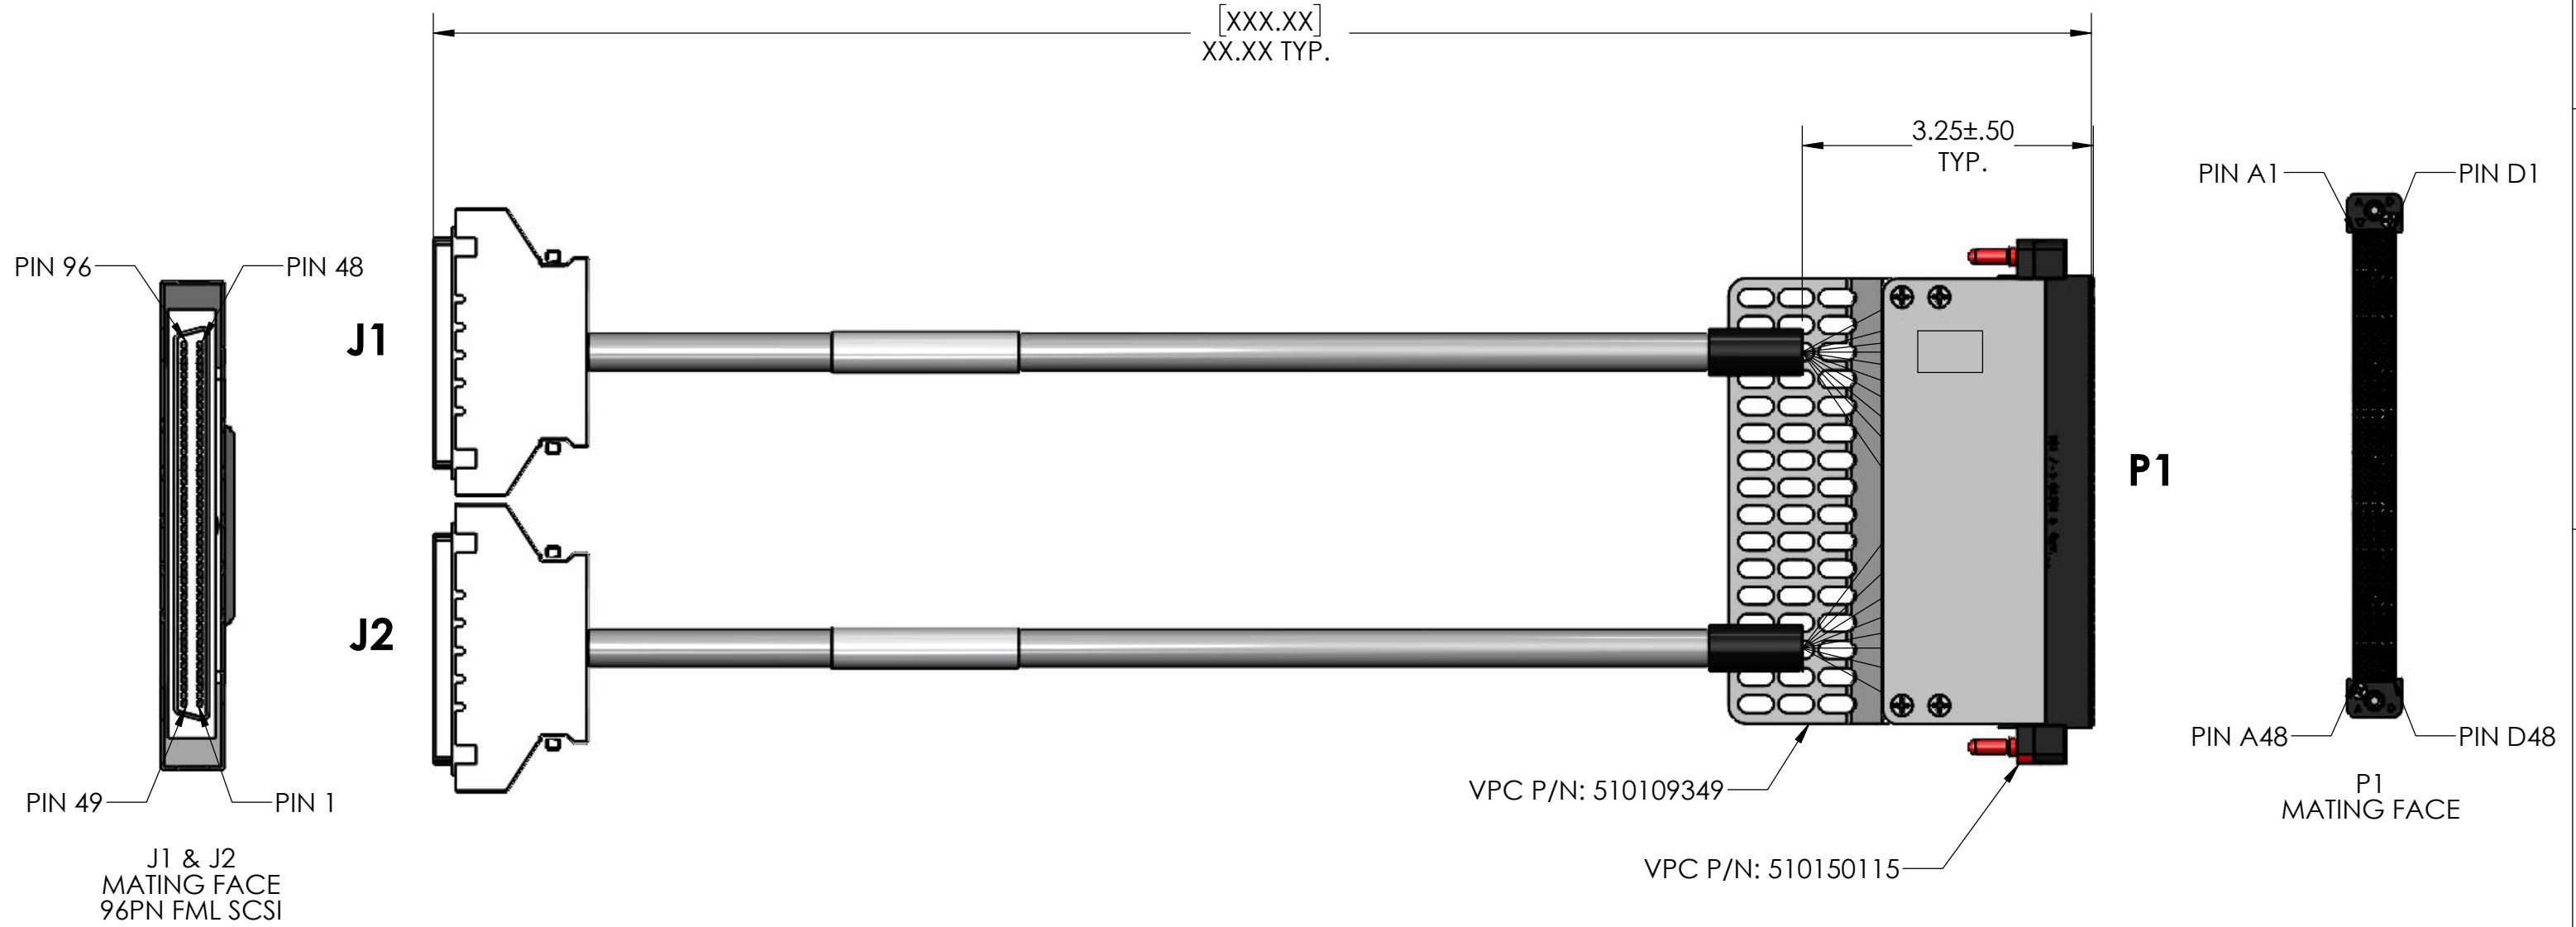

NOTES:
1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM

VPC P/N 540033010X40 WHERE X =	LENGTH XX.XX"
1	20.00" [508]
2	36.00" [914]
6	48.00" [1219]
9	60.00" [1524]
5	72.00" [1829]

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT

DIMENSIONS ARE SHOWN AS:
[MILLIMETERS]
INCHES

CUSTOMER DRAWING

**CBA 192 MOD TO
2-96 FML SCSI**

DWG.NO. **540033010X40** REV **D**

SIZE B	SCALE NONE	CAGE CODE 18117	SHEET 1 OF 1
-----------	---------------	--------------------	-----------------

4

3

2

1

4

3

2

1

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Length (in)	Wire Color	T/P #	To Location (Conn - Pin)	Contact	ALT. COLOR CODE
1	P1-A1	28 T/P	267985	XX.XX	WHT/TAN	1	J1-1	96PN FML	WHT/BLK
2	P1-A2	↑	↑	XX.XX	TAN/WHT	1	J1-2	↑	ORG
3	P1-A3	28 T/P	↑	XX.XX	WHT/BRN	2	J1-3	↑	WHT/BLK
4	P1-A4	↑	↑	XX.XX	BRN/WHT	2	J1-4	↑	BLU
5	P1-A5	28 T/P	↑	XX.XX	WHT/PNK	3	J1-5	↑	WHT/BLK
6	P1-A6	↑	↑	XX.XX	PNK/WHT	3	J1-6	↑	GRN
7	P1-A7	28 T/P	↑	XX.XX	WHT/ORN	4	J1-7	↑	WHT/BLK
8	P1-A8	↑	↑	XX.XX	ORN/WHT	4	J1-8	↑	BRN
9	P1-A9	28 T/P	↑	XX.XX	WHT/YEL	5	J1-9	↑	WHT/BLK
10	P1-A10	↑	↑	XX.XX	YEL/WHT	5	J1-10	↑	GRY
11	P1-A11	28 T/P	↑	XX.XX	WHT/GRN	6	J1-11	↑	RED/BLK
12	P1-A12	↑	↑	XX.XX	GRN/WHT	6	J1-12	↑	ORG
13	P1-A13	28 T/P	↑	XX.XX	WHT/BLU	7	J1-13	↑	RED/BLK
14	P1-A14	↑	↑	XX.XX	BLU/WHT	7	J1-14	↑	BLU
15	P1-A15	28 T/P	↑	XX.XX	WHT/VIO	8	J1-15	↑	RED/BLK
16	P1-A16	↑	↑	XX.XX	VIO/WHT	8	J1-16	↑	GRN
17	P1-A17	28 T/P	↑	XX.XX	WHT/GRY	9	J1-17	↑	RED/BLK
18	P1-A18	↑	↑	XX.XX	GRY/WHT	9	J1-18	↑	BRN
19	P1-A19	28 T/P	↑	XX.XX	TAN/BRN	10	J1-19	↑	RED/BLK
20	P1-A20	↑	↑	XX.XX	BRN/TAN	10	J1-20	↑	GRY
21	P1-A21	28 T/P	↑	XX.XX	TAN/PNK	11	J1-21	↑	PURPLE
22	P1-A22	↑	↑	XX.XX	PNK/TAN	11	J1-22	↑	ORG
23	P1-A23	28 T/P	↑	XX.XX	TAN/ORN	12	J1-23	↑	PURPLE
24	P1-A24	↑	↑	XX.XX	ORN/TAN	12	J1-24	↑	BLU
25	P1-A25	28 T/P	↑	XX.XX	TAN/YEL	13	J1-25	↑	PURPLE
26	P1-A26	↑	↑	XX.XX	YEL/TAN	13	J1-26	↑	GRN
27	P1-A27	28 T/P	↑	XX.XX	TAN/GRN	14	J1-27	↑	PURPLE
28	P1-A28	↑	↑	XX.XX	GRN/TAN	14	J1-28	↑	BRN
29	P1-A29	28 T/P	↑	XX.XX	TAN/BLU	15	J1-29	↑	PURPLE
30	P1-A30	↑	↑	XX.XX	BLU/TAN	15	J1-30	↑	GRY
31	P1-A31	28 T/P	↑	XX.XX	TAN/VIO	16	J1-31	↑	YLW
32	P1-A32	↑	↑	XX.XX	VIO/TAN	16	J1-32	↑	ORG
33	P1-A33	28 T/P	↑	XX.XX	TAN/GRY	17	J1-33	↑	YLW
34	P1-A34	↑	↑	XX.XX	GRY/TAN	17	J1-34	↑	BLU
35	P1-A35	28 T/P	↑	XX.XX	BRN/PNK	18	J1-35	↑	YLW
36	P1-A36	↑	↑	XX.XX	PNK/BRN	18	J1-36	↑	GRN
37	P1-A37	28 T/P	↑	XX.XX	BRN/ORN	19	J1-37	↑	YLW
38	P1-A38	↑	↑	XX.XX	ORN/BRN	19	J1-38	↑	BRN
39	P1-A39	28 T/P	↑	XX.XX	BRN/YEL	20	J1-39	↑	YLW
40	P1-A40	↑	↑	XX.XX	YEL/BRN	20	J1-40	↑	GRY
41	P1-A41	28 T/P	↑	XX.XX	BRN/GRN	21	J1-41	↑	RED
42	P1-A42	↑	↑	XX.XX	GRN/BRN	21	J1-42	↑	ORG
43	P1-A43	28 T/P	↑	XX.XX	BRN/BLU	22	J1-43	↑	RED
44	P1-A44	↑	↑	XX.XX	BLU/BRN	22	J1-44	↑	BLU
45	P1-A45	28 T/P	↑	XX.XX	BRN/VIO	23	J1-45	↑	RED
46	P1-A46	↑	↑	XX.XX	VIO/BRN	23	J1-46	↑	GRN
47	P1-A47	28 T/P	↑	XX.XX	BRN/GRY	24	J1-47	↑	RED
48	P1-A48	↑	↑	XX.XX	GRY/BRN	24	J1-48	↑	BRN

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Length (in)	Wire Color	T/P #	To Location (Conn - Pin)	Contact	ALT. COLOR CODE
49	P1-B1	28 T/P	↑	XX.XX	PNK/ORN	25	J1-49	↑	RED
50	P1-B2	↑	↑	XX.XX	ORN/PNK	25	J1-50	↑	GRY
51	P1-B3	28 T/P	↑	XX.XX	PNK/YEL	26	J1-51	↑	WHT
52	P1-B4	↑	↑	XX.XX	YEL/PNK	26	J1-52	↑	ORG
53	P1-B5	28 T/P	↑	XX.XX	PNK/GRN	27	J1-53	↑	WHT
54	P1-B6	↑	↑	XX.XX	GRN/PNK	27	J1-54	↑	BLU
55	P1-B7	28 T/P	↑	XX.XX	PNK/BLU	28	J1-55	↑	WHT
56	P1-B8	↑	↑	XX.XX	BLU/PNK	28	J1-56	↑	GRN
57	P1-B9	28 T/P	↑	XX.XX	PNK/VIO	29	J1-57	↑	WHT
58	P1-B10	↑	↑	XX.XX	VIO/PNK	29	J1-58	↑	BRN
59	P1-B11	28 T/P	↑	XX.XX	PNK/GRY	30	J1-59	↑	WHT
60	P1-B12	↑	↑	XX.XX	GRY/PNK	30	J1-60	↑	GRY
61	P1-B13	28 T/P	↑	XX.XX	ORN/YEL	31	J1-61	↑	BLK
62	P1-B14	↑	↑	XX.XX	YEL/ORN	31	J1-62	↑	ORG
63	P1-B15	28 T/P	↑	XX.XX	ORN/GRN	32	J1-63	↑	BLK
64	P1-B16	↑	↑	XX.XX	GRN/ORN	32	J1-64	↑	BLU
65	P1-B17	28 T/P	↑	XX.XX	ORN/BLU	33	J1-65	↑	BLK
66	P1-B18	↑	↑	XX.XX	BLU/ORN	33	J1-66	↑	GRN
67	P1-B19	28 T/P	↑	XX.XX	ORN/VIO	34	J1-67	↑	BLK
68	P1-B20	↑	↑	XX.XX	VIO/ORN	34	J1-68	↑	BRN
69	P1-B21	28 T/P	↑	XX.XX	ORN/GRY	35	J1-69	↑	BLK
70	P1-B22	↑	↑	XX.XX	GRY/ORN	35	J1-70	↑	GRY
71	P1-B23	28 T/P	↑	XX.XX	YEL/GRN	36	J1-71	↑	PNK/RED
72	P1-B24	↑	↑	XX.XX	GRN/YEL	36	J1-72	↑	ORG
73	P1-B25	28 T/P	↑	XX.XX	YEL/BLU	37	J1-73	↑	PNK/RED
74	P1-B26	↑	↑	XX.XX	BLU/YEL	37	J1-74	↑	BLU
75	P1-B27	28 T/P	↑	XX.XX	YEL/VIO	38	J1-75	↑	PNK/RED
76	P1-B28	↑	↑	XX.XX	VIO/YEL	38	J1-76	↑	GRN
77	P1-B29	28 T/P	↑	XX.XX	YEL/GRY	39	J1-77	↑	PNK/RED
78	P1-B30	↑	↑	XX.XX	GRY/YEL	39	J1-78	↑	BRN
79	P1-B31	28 T/P	↑	XX.XX	GRN/BLU	40	J1-79	↑	PNK/RED
80	P1-B32	↑	↑	XX.XX	BLU/GRN	40	J1-80	↑	GRY
81	P1-B33	28 T/P	↑	XX.XX	GRN/VIO	41	J1-81	↑	LIGHT BLU
82	P1-B34	↑	↑	XX.XX	VIO/GRN	41	J1-82	↑	ORG
83	P1-B35	28 T/P	↑	XX.XX	GRN/GRY	42	J1-83	↑	LIGHT BLU
84	P1-B36	↑	↑	XX.XX	GRY/GRN	42	J1-84	↑	BLU
85	P1-B37	28 T/P	↑	XX.XX	BLU/VIO	43	J1-85	↑	LIGHT BLU
86	P1-B38	↑	↑	XX.XX	VIO/BLU	43	J1-86	↑	GRN
87	P1-B39	28 T/P	↑	XX.XX	BLU/GRY	44	J1-87	↑	LIGHT BLU
88	P1-B40	↑	↑	XX.XX	GRY/BLU	44	J1-88	↑	BRN
89	P1-B41	28 T/P	↑	XX.XX	VIO/GRY	45	J1-89	↑	LIGHT BLU
90	P1-B42	↑	↑	XX.XX	GRY/VIO	45	J1-90	↑	GRY
91	P1-B43	28 T/P	↑	XX.XX	WHT/RED	46	J1-91	↑	LIGHT GRN
92	P1-B44	↑	↑	XX.XX	RED/WHT	46	J1-92	↑	ORG
93	P1-B45	28 T/P	↑	XX.XX	WHT/BLK	47	J1-93	↑	LIGHT GRN
94	P1-B46	↑	↑	XX.XX	BLK/WHT	47	J1-94	↑	BLU
95	P1-B47	28 T/P	↑	XX.XX	TAN/RED	48	J1-95	↑	LIGHT GRN
96	P1-B48	↑	↑	XX.XX	RED/TAN	48	J1-96	↑	GRN

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Length (in)	Wire Color	T/P #	To Location (Conn - Pin)	Contact	ALT. COLOR CODE
97	P1-C1	28 T/P	267985	XX.XX	WHT/TAN	49	J2-1	96PN FML	WHT/BLK
98	P1-C2	↑	↑	XX.XX	TAN/WHT	49	J2-2	↑	ORG
99	P1-C3	28 T/P	↑	XX.XX	WHT/BRN	50	J2-3	↑	WHT/BLK
100	P1-C4	↑	↑	XX.XX	BRN/WHT	50	J2-4	↑	BLU
101	P1-C5	28 T/P	↑	XX.XX	WHT/PNK	51	J2-5	↑	WHT/BLK
102	P1-C6	↑	↑	XX.XX	PNK/WHT	51	J2-6	↑	GRN
103	P1-C7	28 T/P	↑	XX.XX	WHT/ORN	52	J2-7	↑	WHT/BLK
104	P1-C8	↑	↑	XX.XX	ORN/WHT	52	J2-8	↑	BRN
105	P1-C9	28 T/P	↑	XX.XX	WHT/YEL	53	J2-9	↑	WHT/BLK
106	P1-C10	↑	↑	XX.XX	YEL/WHT	53	J2-10	↑	GRY
107	P1-C11	28 T/P	↑	XX.XX	WHT/GRN	54	J2-11	↑	RED/BLK
108	P1-C12	↑	↑	XX.XX	GRN/WHT	54	J2-12	↑	ORG
109	P1-C13	28 T/P	↑	XX.XX	WHT/BLU	55	J2-13	↑	RED/BLK
110	P1-C14	↑	↑	XX.XX	BLU/WHT	55	J2-14	↑	BLU
111	P1-C15	28 T/P	↑	XX.XX	WHT/VIO	56	J2-15	↑	RED/BLK
112	P1-C16	↑	↑	XX.XX	VIO/WHT	56	J2-16	↑	GRN
113	P1-C17	28 T/P	↑	XX.XX	WHT/GRY	57	J2-17	↑	RED/BLK
114	P1-C18	↑	↑	XX.XX	GRY/WHT	57	J2-18	↑	BRN
115	P1-C19	28 T/P	↑	XX.XX	TAN/BRN	58	J2-19	↑	RED/BLK
116	P1-C20	↑	↑	XX.XX	BRN/TAN	58	J2-20	↑	GRY
117	P1-C21	28 T/P	↑	XX.XX	TAN/PNK	59	J2-21	↑	PURPLE
118	P1-C22	↑	↑	XX.XX	PNK/TAN	59	J2-22	↑	ORG
119	P1-C23	28 T/P	↑	XX.XX	TAN/ORN	60	J2-23	↑	PURPLE
120	P1-C24	↑	↑	XX.XX	ORN/TAN	60	J2-24	↑	BLU
121	P1-C25	28 T/P	↑	XX.XX	TAN/YEL	61	J2-25	↑	PURPLE
122	P1-C26	↑	↑	XX.XX	YEL/TAN	61	J2-26	↑	GRN
123	P1-C27	28 T/P	↑	XX.XX	TAN/GRN	62	J2-27	↑	PURPLE
124	P1-C28	↑	↑	XX.XX	GRN/TAN	62	J2-28	↑	BRN
125	P1-C29	28 T/P	↑	XX.XX	TAN/BLU	63	J2-29	↑	PURPLE
126	P1-C30	↑	↑	XX.XX	BLU/TAN	63	J2-30	↑	GRY
127	P1-C31	28 T/P	↑	XX.XX	TAN/VIO	64	J2-31	↑	YLW
128	P1-C32	↑	↑	XX.XX	VIO/TAN	64	J2-32	↑	ORG
129	P1-C33	28 T/P	↑	XX.XX	TAN/GRY	65	J2-33	↑	YLW
130	P1-C34	↑	↑	XX.XX	GRY/TAN	65	J2-34	↑	BLU
131	P1-C35	28 T/P	↑	XX.XX	BRN/PNK	66	J2-35	↑	YLW
132	P1-C36	↑	↑	XX.XX	PNK/BRN	66	J2-36	↑	GRN
133	P1-C37	28 T/P	↑	XX.XX	BRN/ORN	67	J2-37	↑	YLW
134	P1-C38	↑	↑	XX.XX	ORN/BRN	67	J2-38	↑	BRN
135	P1-C39	28 T/P	↑	XX.XX	BRN/YEL	68	J2-39	↑	YLW
136	P1-C40	↑	↑	XX.XX	YEL/BRN	68	J2-40	↑	GRY
137	P1-C41	28 T/P	↑	XX.XX	BRN/GRN	69	J2-41	↑	RED
138	P1-C42	↑	↑	XX.XX	GRN/BRN	69	J2-42	↑	ORG
139	P1-C43	28 T/P	↑	XX.XX	BRN/BLU	70	J2-43	↑	RED
140	P1-C44	↑	↑	XX.XX	BLU/BRN	70	J2-44	↑	BLU
141	P1-C45	28 T/P	↑	XX.XX	BRN/VIO	71	J2-45	↑	RED
142	P1-C46	↑	↑	XX.XX	VIO/BRN	71	J2-46	↑	GRN
143	P1-C47	28 T/P	↑	XX.XX	BRN/GRY	72	J2-47	↑	RED
144	P1-C48	↑	↑	XX.XX	GRY/BRN	72	J2-48	↑	BRN

Run #	From Location (Conn - Pin)	Wire AWG	Wire/Patchcord P/N	Length (in)	Wire Color	T/P #	To Location (Conn - Pin)	Contact	ALT. COLOR CODE
145	P1-D1	28 T/P	↑	XX.XX	PNK/ORN	73	J2-49	↑	RED
146	P1-D2	↑	↑	XX.XX	ORN/PNK	73	J2-50	↑	GRY
147	P1-D3	28 T/P	↑	XX.XX	PNK/YEL	74	J2-51	↑	WHT
148	P1-D4	↑	↑	XX.XX	YEL/PNK	74	J2-52	↑	ORG
149	P1-D5	28 T/P	↑	XX.XX	PNK/GRN	75	J2-53	↑	WHT
150	P1-D6	↑	↑	XX.XX	GRN/PNK	75	J2-54	↑	BLU
151	P1-D7	28 T/P	↑	XX.XX	PNK/BLU	76	J2-55	↑	WHT
152	P1-D8	↑	↑	XX.XX	BLU/PNK	76	J2-56	↑	GRN
153	P1-D9	28 T/P	↑	XX.XX	PNK/VIO	77	J2-57	↑	WHT
154	P1-D10	↑	↑	XX.XX	VIO/PNK	77	J2-58	↑	BRN
155	P1-D11	28 T/P	↑	XX.XX	PNK/GRY	78	J2-59	↑	WHT
156	P1-D12	↑	↑	XX.XX	GRY/PNK	78	J2-60	↑	GRY
157	P1-D13	28 T/P	↑	XX.XX	ORN/YEL	79	J2-61	↑	BLK
158	P1-D14	↑	↑	XX.XX	YEL/ORN	79	J2-62	↑	ORG
159	P1-D15	28 T/P	↑	XX.XX	ORN/GRN	80	J2-63	↑	BLK
160	P1-D16	↑	↑	XX.XX	GRN/ORN	80	J2-64	↑	BLU
161	P1-D17	28 T/P	↑	XX.XX	ORN/BLU	81	J2-65	↑	BLK
162	P1-D18	↑	↑	XX.XX	BLU/ORN	81	J2-66	↑	GRN
163	P1-D19	28 T/P	↑	XX.XX	ORN/VIO	82	J2-67	↑	BLK
164	P1-D20	↑	↑	XX.XX	VIO/ORN	82	J2-68	↑	BRN
165	P1-D21	28 T/P	↑	XX.XX	ORN/GRY	83	J2-69	↑	BLK
166	P1-D22	↑	↑	XX.XX	GRY/ORN	83	J2-70	↑	GRY
167	P1-D23	28 T/P	↑	XX.XX	YEL/GRN	84	J2-71	↑	PNK/RED
168	P1-D24	↑	↑	XX.XX	GRN/YEL	84	J2-72	↑	ORG
169	P1-D25	28 T/P	↑	XX.XX	YEL/BLU	85	J2-73	↑	PNK/RED
170	P1-D26	↑	↑	XX.XX	BLU/YEL	85	J2-74	↑	BLU
171	P1-D27	28 T/P	↑	XX.XX	YEL/VIO	86	J2-75	↑	PNK/RED
172	P1-D28	↑	↑	XX.XX	VIO/YEL	86	J2-76	↑	GRN
173	P1-D29	28 T/P	↑	XX.XX	YEL/GRY	87	J2-77	↑	PNK/RED
174	P1-D30	↑	↑	XX.XX	GRY/YEL	87	J2-78	↑	BRN
175	P1-D31	28 T/P	↑	XX.XX	GRN/BLU	88	J2-79	↑	PNK/RED
176	P1-D32	↑	↑	XX.XX	BLU/GRN	88	J2-80	↑	GRY
177	P1-D33	28 T/P	↑	XX.XX	GRN/VIO	89	J2-81	↑	LIGHT BLU
178	P1-D34	↑	↑	XX.XX	VIO/GRN	89	J2-82	↑	ORG
179	P1-D35	28 T/P	↑	XX.XX	GRN/GRY	90	J2-83	↑	LIGHT BLU
180	P1-D36	↑	↑	XX.XX	GRY/GRN	90	J2-84	↑	BLU
181	P1-D37	28 T/P	↑	XX.XX	BLU/VIO	91	J2-85	↑	LIGHT BLU
182	P1-D38	↑	↑	XX.XX	VIO/BLU	91	J2-86	↑	GRN
183	P1-D39	28 T/P	↑	XX.XX	BLU/GRY	92	J2-87	↑	LIGHT BLU
184	P1-D40	↑	↑	XX.XX	GRY/BLU	92	J2-88	↑	BRN
185	P1-D41	28 T/P	↑	XX.XX	VIO/GRY	93	J2-89	↑	LIGHT BLU
186	P1-D42	↑	↑	XX.XX	GRY/VIO	93	J2-90	↑	GRY
187	P1-D43	28 T/P	↑	XX.XX	WHT/RED	94	J2-91	↑	LIGHT GRN
188	P1-D44	↑	↑	XX.XX	RED/WHT	94	J2-92	↑	ORG
189	P1-D45	28 T/P	↑	XX.XX	WHT/BLK	95	J2-93	↑	LIGHT GRN
190	P1-D46	↑	↑	XX.XX	BLK/WHT	95	J2-94	↑	BLU
191	P1-D47	28 T/P	↑	XX.XX	TAN/RED	96	J2-95	↑	LIGHT GRN
192	P1-D48	↑	↑	XX.XX	RED/TAN	96	J2-96	↑	GRN