


DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VPC ENGINEERING IF MORE DETAIL IS REQUIRED.

REV	DESCRIPTION	DATE	ENGINEER
A	ORIGINAL RELEASE ECN #12633	6/15/2022	E. FOX

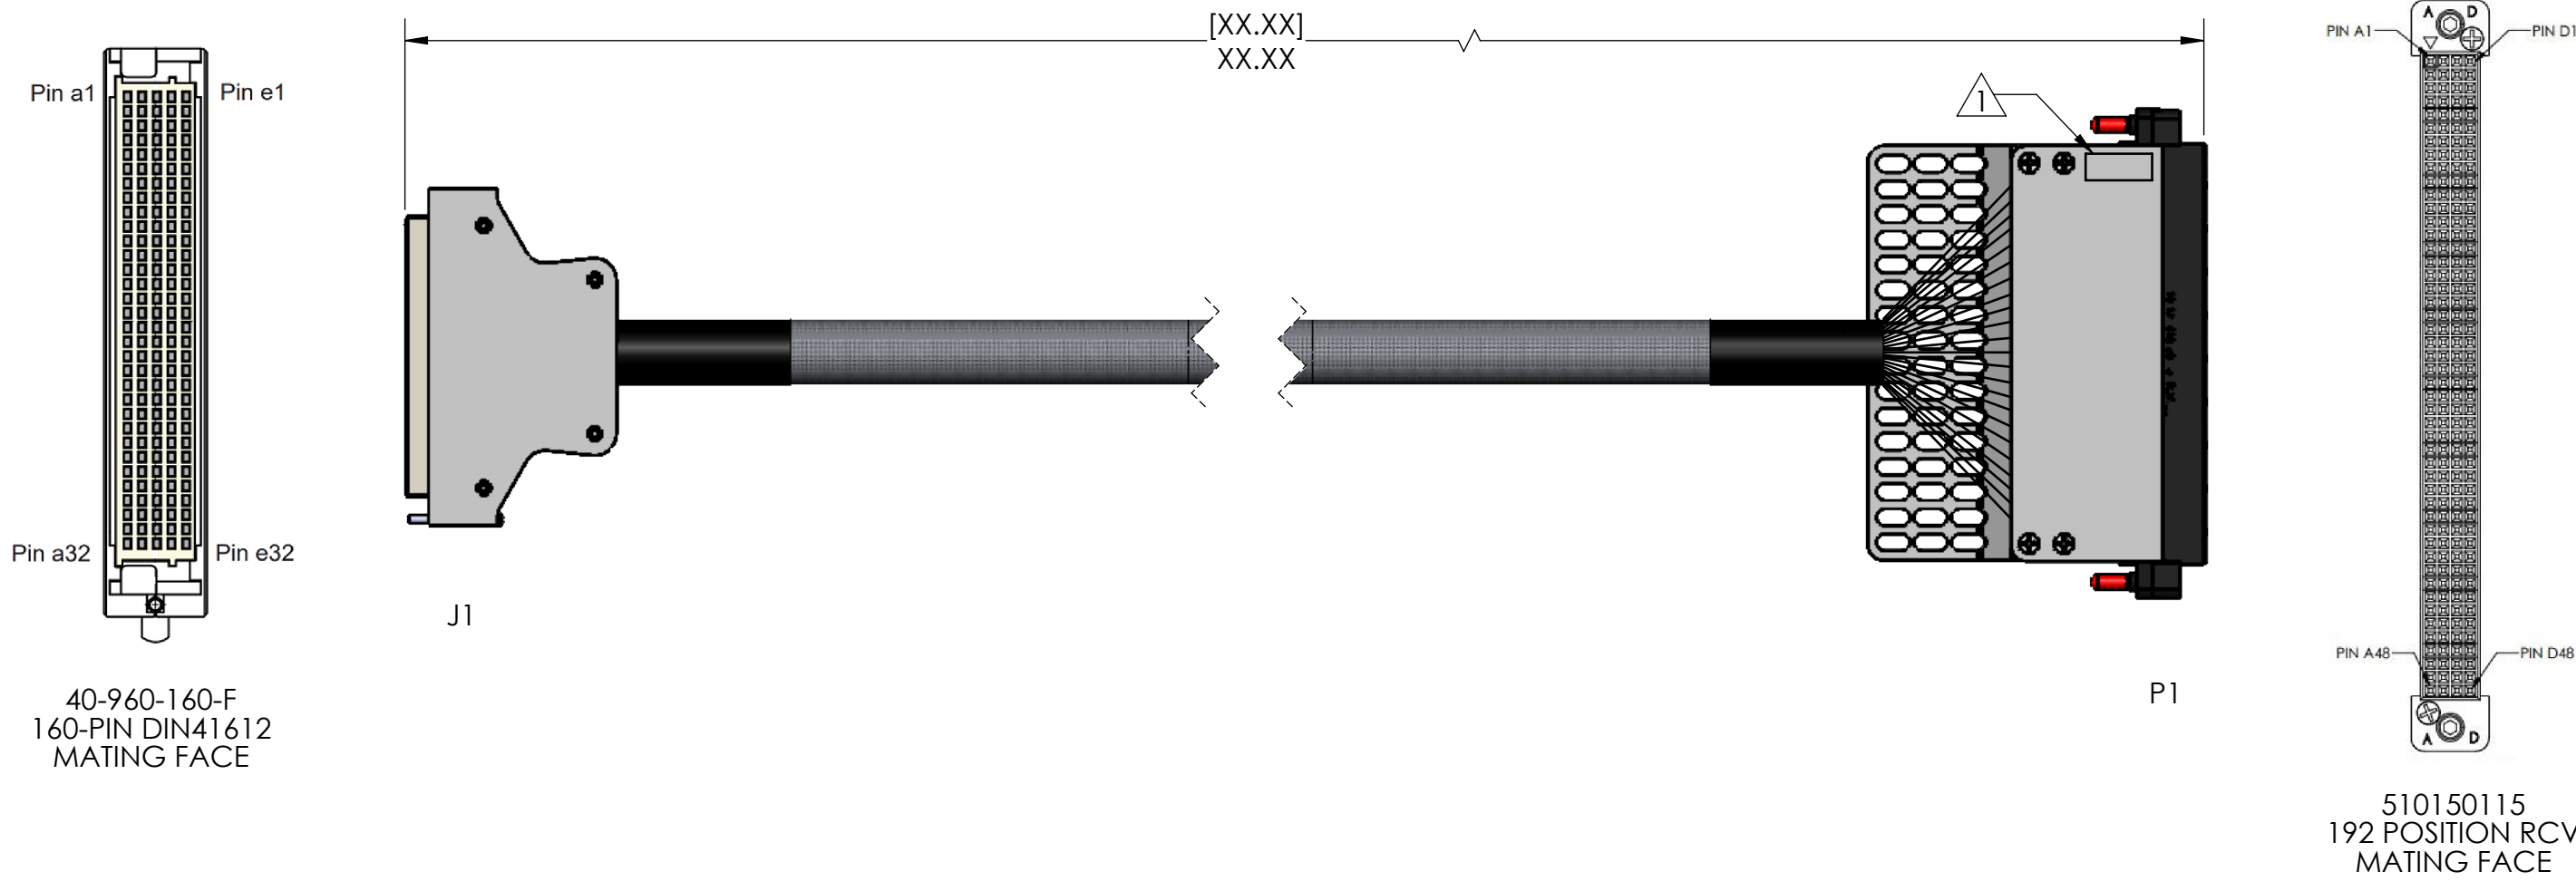

40-960-160-F
160-PIN DIN41612
MATING FACE

510150115
192 POSITION RCV
MATING FACE

- 3. MATING MODULE 510151105, MATING PATCHCORDS 7-121924000-XXX
- 2. FOR USE WITH PICKERING CARDS ONLY

NOTES:

VPC P/N 540069040X40 WHERE X =	LENGTH XX.XX"
1	20.00" [508]
2	36.00" [914]
6	48.00" [1219]
9	60.00" [1524]
5	72.00" [1829]

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT

DIMENSIONS ARE SHOWN AS:
[MILLIMETERS]
INCHES

CUSTOMER DRAWING

CBA, RCV, QuadraPaddle to 160 DIN FML f/ Pickering

DWG.NO. **540069040X40** REV **A**

SIZE B	SCALE NONE	CAGE CODE 18117	SHEET 1 OF 2
-----------	---------------	--------------------	-----------------

Run #	From Location (Conn - Pin)	AWG	Wire Color	To Location (Conn-Pin)
1	P1-A1	24	WHT	J1-A1
2	P1-A2	24	WHT	J1-A2
3	P1-A3	24	WHT	J1-A3
4	P1-A4	24	WHT	J1-A4
5	P1-A5	24	WHT	J1-A5
6	P1-A6	24	WHT	J1-A6
7	P1-A7	24	WHT	J1-A7
8	P1-A8	24	WHT	J1-A8
9	P1-A9	24	WHT	J1-A9
10	P1-A10	24	WHT	J1-A10
11	P1-A11	24	WHT	J1-A11
12	P1-A12	24	WHT	J1-A12
13	P1-A13	24	WHT	J1-A13
14	P1-A14	24	WHT	J1-A14
15	P1-A15	24	WHT	J1-A15
16	P1-A16	24	WHT	J1-A16
17	P1-A17	24	WHT	J1-A17
18	P1-A18	24	WHT	J1-A18
19	P1-A19	24	WHT	J1-A19
20	P1-A20	24	WHT	J1-A20
21	P1-A21	24	WHT	J1-A21
22	P1-A22	24	WHT	J1-A22
23	P1-A23	24	WHT	J1-A23
24	P1-A24	24	WHT	J1-A24
25	P1-A25	24	WHT	J1-A25
26	P1-A26	24	WHT	J1-A26
27	P1-A27	24	WHT	J1-A27
28	P1-A28	24	WHT	J1-A28
29	P1-A29	24	WHT	J1-A29
30	P1-A30	24	WHT	J1-A30
31	P1-A31	24	WHT	J1-A31
32	P1-A32	24	WHT	J1-A32
33	P1-A33	24	WHT	J1-B1
34	P1-A34	24	WHT	J1-B2
35	P1-A35	24	WHT	J1-B3
36	P1-A36	24	WHT	J1-B4
37	P1-A37	24	WHT	J1-B5
38	P1-A38	24	WHT	J1-B6
39	P1-A39	24	WHT	J1-B7
40	P1-A40	24	WHT	J1-B8

Run #	From Location (Conn - Pin)	AWG	Wire Color	To Location (Conn-Pin)
41	P1-A41	24	WHT	J1-B9
42	P1-A42	24	WHT	J1-B10
43	P1-A43	24	WHT	J1-B11
44	P1-A44	24	WHT	J1-B12
45	P1-A45	24	WHT	J1-B13
46	P1-A46	24	WHT	J1-B14
47	P1-A47	24	WHT	J1-B15
48	P1-A48	24	WHT	J1-B16
49	P1-B1	24	WHT	J1-B17
50	P1-B2	24	WHT	J1-B18
51	P1-B3	24	WHT	J1-B19
52	P1-B4	24	WHT	J1-B20
53	P1-B5	24	WHT	J1-B21
54	P1-B6	24	WHT	J1-B22
55	P1-B7	24	WHT	J1-B23
56	P1-B8	24	WHT	J1-B24
57	P1-B9	24	WHT	J1-B25
58	P1-B10	24	WHT	J1-B26
59	P1-B11	24	WHT	J1-B27
60	P1-B12	24	WHT	J1-B28
61	P1-B13	24	WHT	J1-B29
62	P1-B14	24	WHT	J1-B30
63	P1-B15	24	WHT	J1-B31
64	P1-B16	24	WHT	J1-B32
65	P1-B17	24	WHT	J1-C1
66	P1-B18	24	WHT	J1-C2
67	P1-B19	24	WHT	J1-C3
68	P1-B20	24	WHT	J1-C4
69	P1-B21	24	WHT	J1-C5
70	P1-B22	24	WHT	J1-C6
71	P1-B23	24	WHT	J1-C7
72	P1-B24	24	WHT	J1-C8
73	P1-B25	24	WHT	J1-C9
74	P1-B26	24	WHT	J1-C10
75	P1-B27	24	WHT	J1-C11
76	P1-B28	24	WHT	J1-C12
77	P1-B29	24	WHT	J1-C13
78	P1-B30	24	WHT	J1-C14
79	P1-B31	24	WHT	J1-C15
80	P1-B32	24	WHT	J1-C16

Run #	From Location (Conn - Pin)	AWG	Wire Color	To Location (Conn-Pin)
81	P1-B33	24	WHT	J1-C17
82	P1-B34	24	WHT	J1-C18
83	P1-B35	24	WHT	J1-C19
84	P1-B36	24	WHT	J1-C20
85	P1-B37	24	WHT	J1-C21
86	P1-B38	24	WHT	J1-C22
87	P1-B39	24	WHT	J1-C23
88	P1-B40	24	WHT	J1-C24
89	P1-B41	24	WHT	J1-C25
90	P1-B42	24	WHT	J1-C26
91	P1-B43	24	WHT	J1-C27
92	P1-B44	24	WHT	J1-C28
93	P1-B45	24	WHT	J1-C29
94	P1-B46	24	WHT	J1-C30
95	P1-B47	24	WHT	J1-C31
96	P1-B48	24	WHT	J1-C32
97	P1-C1	24	WHT	J1-D1
98	P1-C2	24	WHT	J1-D2
99	P1-C3	24	WHT	J1-D3
100	P1-C4	24	WHT	J1-D4
101	P1-C5	24	WHT	J1- D5
102	P1-C6	24	WHT	J1- D6
103	P1-C7	24	WHT	J1- D7
104	P1-C8	24	WHT	J1- D8
105	P1-C9	24	WHT	J1- D9
106	P1-C10	24	WHT	J1- D10
107	P1-C11	24	WHT	J1- D11
108	P1-C12	24	WHT	J1- D12
109	P1-C13	24	WHT	J1- D13
110	P1-C14	24	WHT	J1- D14
111	P1-C15	24	WHT	J1- D15
112	P1-C16	24	WHT	J1- D16
113	P1-C17	24	WHT	J1- D17
114	P1-C18	24	WHT	J1- D18
115	P1-C19	24	WHT	J1- D19
116	P1-C20	24	WHT	J1- D20
117	P1-C21	24	WHT	J1- D21
118	P1-C22	24	WHT	J1- D22
119	P1-C23	24	WHT	J1- D23
120	P1-C24	24	WHT	J1- D24

Run #	From Location (Conn - Pin)	AWG	Wire Color	To Location (Conn-Pin)
121	P1-C25	24	WHT	J1- D25
122	P1-C26	24	WHT	J1-D26
123	P1-C27	24	WHT	J1-D27
124	P1-C28	24	WHT	J1-D28
125	P1-C29	24	WHT	J1-D29
126	P1-C30	24	WHT	J1-D30
127	P1-C31	24	WHT	J1-D31
128	P1-C32	24	WHT	J1-D32
129	P1-C33	24	WHT	J1-E1
130	P1-C34	24	WHT	J1-E2
131	P1-C35	24	WHT	J1-E3
132	P1-C36	24	WHT	J1-E4
133	P1-C37	24	WHT	J1-E5
134	P1-C38	24	WHT	J1-E6
135	P1-C39	24	WHT	J1-E7
136	P1-C40	24	WHT	J1-E8
137	P1-C41	24	WHT	J1-E9
138	P1-C42	24	WHT	J1-E10
139	P1-C43	24	WHT	J1-E11
140	P1-C44	24	WHT	J1-E12
141	P1-C45	24	WHT	J1-E13
142	P1-C46	24	WHT	J1-E14
143	P1-C47	24	WHT	J1-E15
144	P1-C48	24	WHT	J1-E16
145	P1-D1	24	WHT	J1-E17
146	P1-D2	24	WHT	J1-E18
147	P1-D3	24	WHT	J1-E19
148	P1-D4	24	WHT	J1-E20
149	P1-D5	24	WHT	J1-E21
150	P1-D6	24	WHT	J1-E22
151	P1-D7	24	WHT	J1- E23
152	P1-D8	24	WHT	J1- E24
153	P1-D9	24	WHT	J1- E25
154	P1-D10	24	WHT	J1- E26
155	P1-D11	24	WHT	J1- E27
156	P1-D12	24	WHT	J1- E28
157	P1-D13	24	WHT	J1- E29
158	P1-D14	24	WHT	J1- E30
159	P1-D15	24	WHT	J1- E31
160	P1-D16	24	WHT	J1- E32

CUSTOMER DRAWING - CUSTOMER DRAWING - CUSTOMER DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VPC AND IS PERMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

DWG.NO.	540069040X40			REV	A
SIZE	SCALE	CAGE CODE	SHEET		
B	NONE	18117	2 OF 2		

DO NOT SCALE DRAWING