
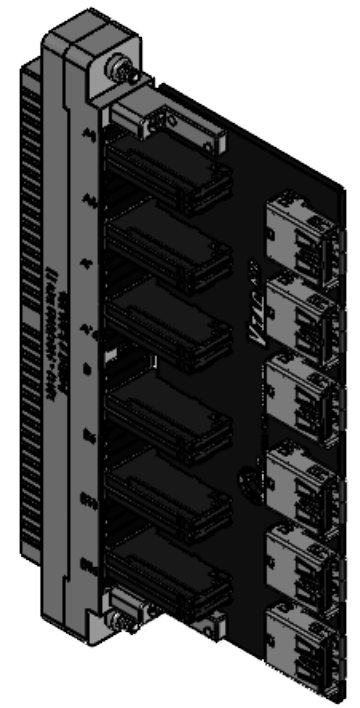
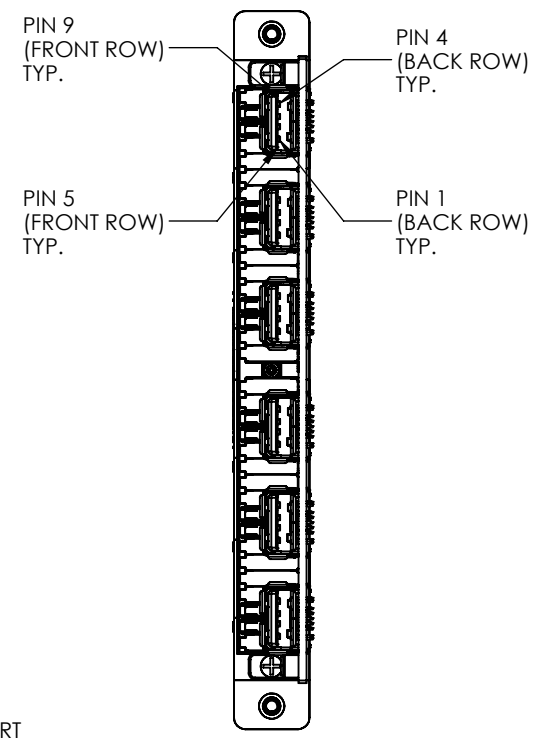
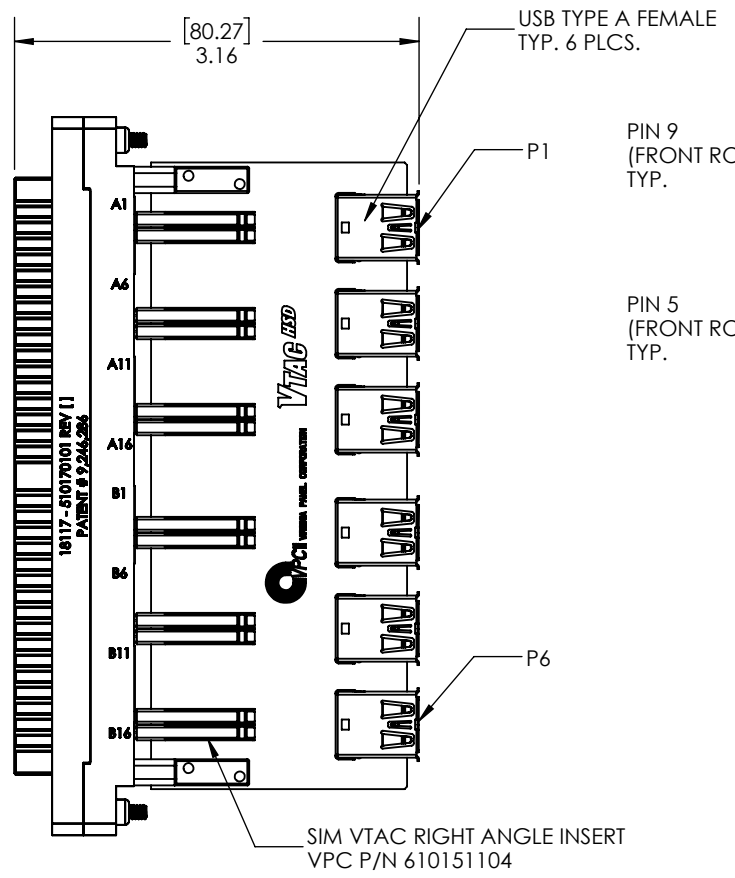


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

REV	DESCRIPTION	DATE	ENGINEER
D	ECN #15795	5/5/2026	S MARSHALL

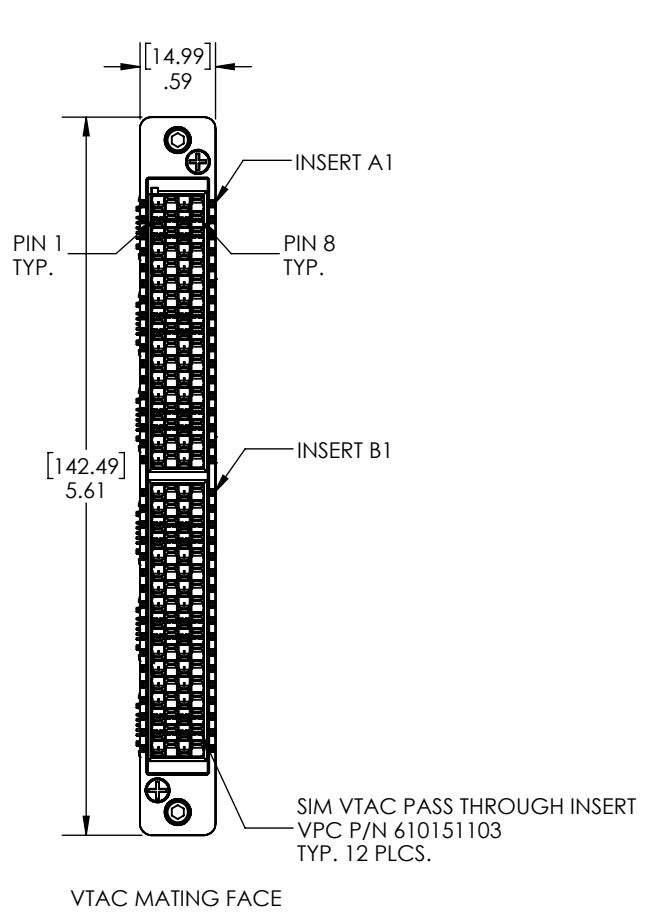

PCB TRACES											
FROM VTAC	TO USB	FROM VTAC	TO USB	FROM VTAC	TO USB	FROM VTAC	TO USB	FROM VTAC	TO USB	FROM VTAC	TO USB
A2-1	SHIELD	A8-1	SHIELD	A14-1	SHIELD	B3-1	SHIELD	B9-1	SHIELD	B15-1	SHIELD
A2-2	P1-1	A8-2	P2-1	A14-2	P3-1	B3-2	P4-1	B9-2	P5-1	B15-2	P6-1
A2-3	P1-4	A8-3	P2-4	A14-3	P3-4	B3-3	P4-4	B9-3	P5-4	B15-3	P6-4
A2-4	SHIELD	A8-4	SHIELD	A14-4	SHIELD	B3-4	SHIELD	B9-4	SHIELD	B15-4	SHIELD
A2-5	SHIELD	A8-5	SHIELD	A14-5	SHIELD	B3-5	SHIELD	B9-5	SHIELD	B15-5	SHIELD
A2-6	P1-2	A8-6	P2-2	A14-6	P3-2	B3-6	P4-2	B9-6	P5-2	B15-6	P6-2
A2-7	P1-3	A8-7	P2-3	A14-7	P3-3	B3-7	P4-3	B9-7	P5-3	B15-7	P6-3
A2-8	SHIELD	A8-8	SHIELD	A14-8	SHIELD	B3-8	SHIELD	B9-8	SHIELD	B15-8	SHIELD
A3-1	P1-7	A9-1	P2-7	A15-1	P3-7	B4-1	P4-7	B10-1	P5-7	B16-1	P6-7
A3-2	P1-9	A9-2	P2-9	A15-2	P3-9	B4-2	P4-9	B10-2	P5-9	B16-2	P6-9
A3-3	P1-8	A9-3	P2-8	A15-3	P3-8	B4-3	P4-8	B10-3	P5-8	B16-3	P6-8
A3-4	P1-7	A9-4	P2-7	A15-4	P3-7	B4-4	P4-7	B10-4	P5-7	B16-4	P6-7
A3-5	P1-7	A9-5	P2-7	A15-5	P3-7	B4-5	P4-7	B10-5	P5-7	B16-5	P6-7
A3-6	P1-6	A9-6	P2-6	A15-6	P3-6	B4-6	P4-6	B10-6	P5-6	B16-6	P6-6
A3-7	P1-5	A9-7	P2-5	A15-7	P3-5	B4-7	P4-5	B10-7	P5-5	B16-7	P6-5
A3-8	P1-7	A9-8	P2-7	A15-8	P3-7	B4-8	P4-7	B10-8	P5-7	B16-8	P6-7

3. PCB DESIGNED TO BE LOADED ON THE LEFT WHEN VIEWED FROM THE VPC RECEIVER MATING FACE.

2. MATERIALS:
 PCB:
 PCB = 370HR & R4003C W/PSR-4000BN SOLDERMASK
 PCB PADS = GOLD IMMERSION
 VTAC INSERTS:
 VTAC CONTACT = ALLOY 7025
 OUTER SHELL = BLUE/BLACK LCP
 USB 3.0 TYPE A FEMALE:
 HOUSING = THERMOPLASTIC
 CONTACT = COPPER ALLOY
 SHELL = STAINLESS STEEL

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM

NOTES:

RELATIVE CONNECTOR POSITIONS AND WIRE ROUTING ARE GENERIC AND MAY VARY WITH PINOUT
 DIMENSIONS ARE SHOWN AS:
 [MILLIMETERS]
 INCHES

CUSTOMER DRAWING

VTAC RCV PCB TO (6) USB 3 TYPE A FML

DWG. NO. **510170103** REV D

SCALE 2:3 CAGE CODE 18117 SHEET 1 OF 1